

65°PARALLELO/



65°PARALLELO/



/ The name of this collection references the geographical coordinates of Iceland and its uncontaminated natural wonders. The 65th parallel is a circle of latitude that is 65 degrees north of the equatorial plane and crosses the Atlantic Ocean, Europe, Asia and North America.

Sizes

60X120 / 24"X48"

75X75 / 30"X30"

60X60 / 24"X24"

37,5X75 / 15"X30"

Surfaces

ST N

Colours

N

G

W

B



65°PARALLELO/N




Contaminazioni creative
Creative combinations








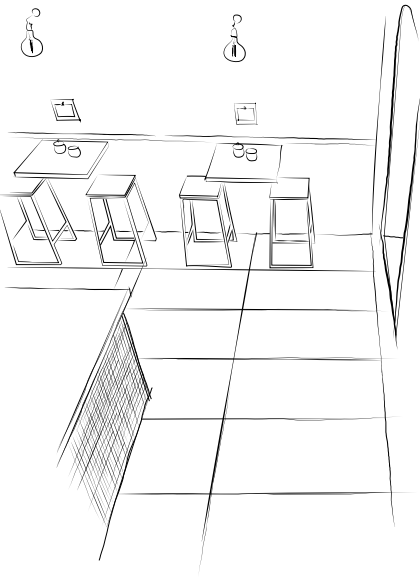

Contaminazioni creative
Creative combinations



65°PARALLELO/B

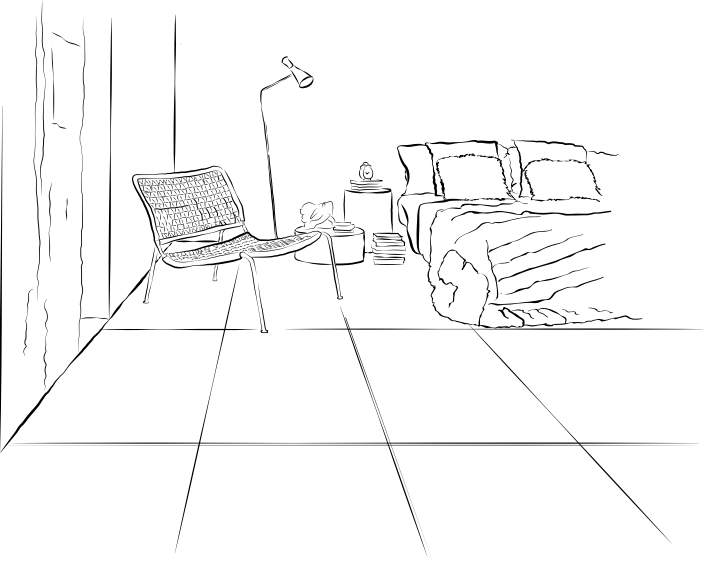

Contaminazioni creative
Creative combinations





65°PARALLELO/B

.65PRL 12B RM




65° PARALLELO/



/ The collection is inspired by a long and adventurous exploration of Iceland, a world that nature is still creating. Energy is everywhere on the island, sculpting mountains, fjords and endless deserts that sparkle in the midnight sun during summer and under the northern lights in winter.



65°PARALLELO/G

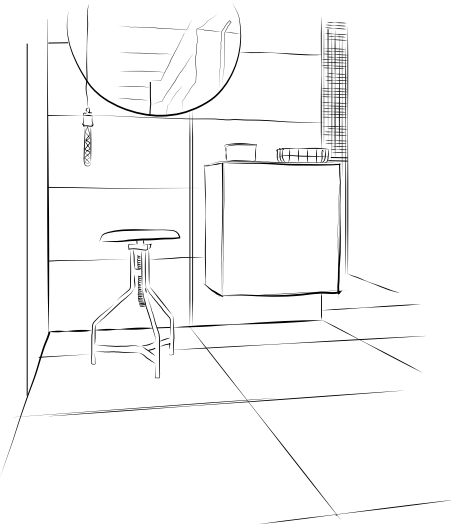

Contaminazioni creative
Creative combinations



.65PRL 75G RM / .65PRL 377G RM / .65PRL L 0,5x60 / MK.65PRL MIX




.65PRL 75G RM / .65PRL 377G RM / .65PRL L 0,5x60 / MK.65PRL MIX

.65PRL 377G RM / .65PRL L 0,5x60



65°PARALLELO/W

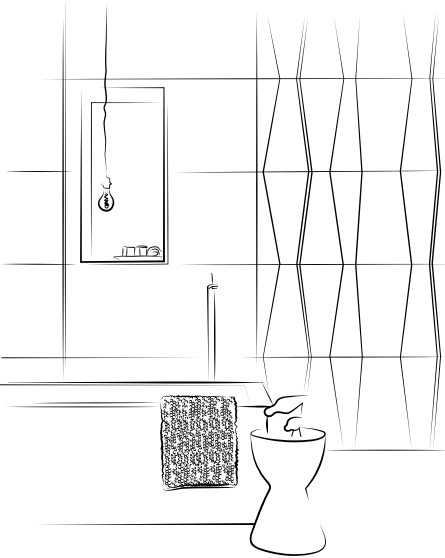

Contaminazioni creative
Creative combinations



.65PRL 12W RM / .65PRL DK 12W 2 / .65PRL L 0,5x60

65°PARALLELO/W



Contaminazioni creative
Creative combinations





.65PRL 12W RM



65°PARALLELO/

FULL BODY PORCELAIN TILE

65°PARALLELO/

ISO 13006 - G - Bla UGL (E ≤ 0,5%) UNI EN 14411 - G -



N

G

W

B



STN

	.65PRL N	.65PRL 12N RM	.65PRL 75N RM	.65PRL 377N RM	.65PRL 60N RM	MK.65PRL 30N
	.65PRL G	.65PRL 12G RM	.65PRL 75G RM	.65PRL 377G RM	.65PRL 60G RM	MK.65PRL 30G

STN


	.65PRL W	.65PRL 12W RM	.65PRL 75W RM	.65PRL 377W RM	.65PRL 60W RM	MK.65PRL 30W
	.65PRL B	.65PRL 12B RM	.65PRL 75B RM	.65PRL 377B RM	.65PRL 60B RM	MK.65PRL 30B

65°PARALLELO/


FULL BODY PORCELAIN TILE

ISO 13006 - G - Bla UGL (E ≤ 0,5%) UNI EN 14411 - G -


Decorative elements

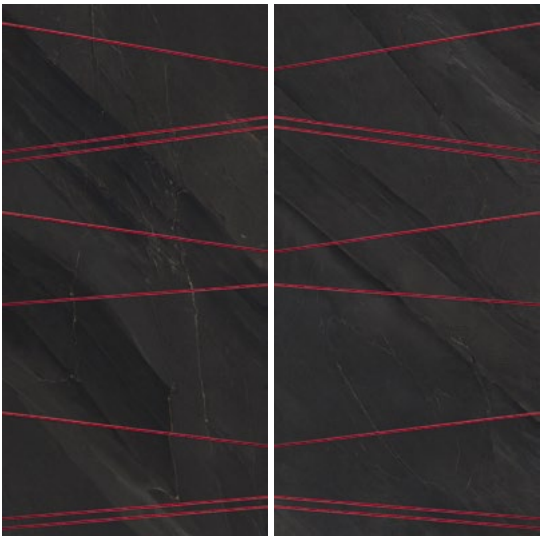


.65PRL DK 12N 2
60X120 / 24”X48”

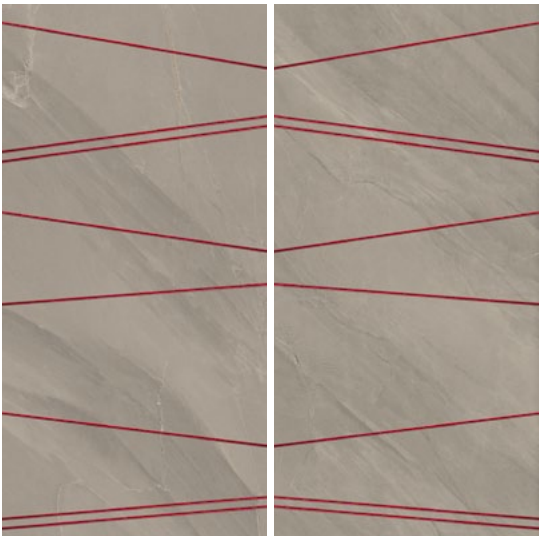


.65PRL DK 12G 2
60X120 / 24”X48”

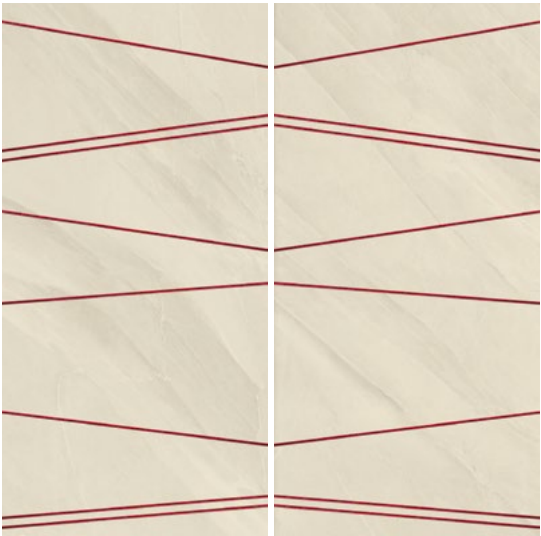

.65PRL DK 12W 2
60X120 / 24”X48”

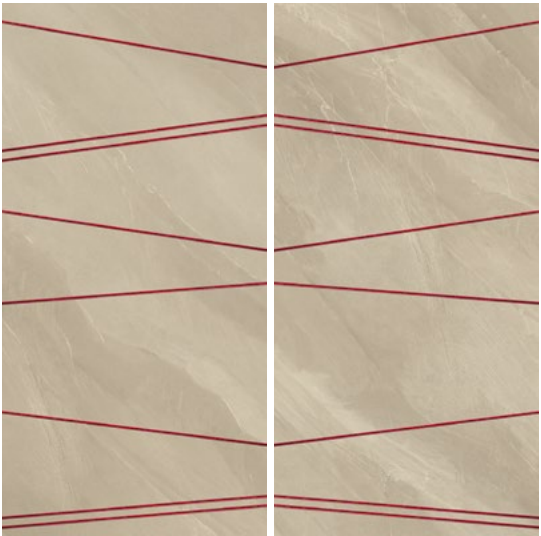

.65PRL DK 12B 2
60X120 / 24”X48”



MK.65PRL N
30X30 / 12”X12”



MK.65PRL MIX
30X30 / 12”X12”




.65PRL L 0,5X60 / 0,2”X24”

Pezzi speciali / Trims


ST N



6X60
2.4”X24”



6X75
2.4”X30”



120X32,5
48”X12.8”

	.65PRL N	.65PRL BT60N	.65PRL BT75N	.65PRL G120N
	.65PRL G	.65PRL BT60G	.65PRL BT75G	.65PRL G120G
	.65PRL W	.65PRL BT60W	.65PRL BT75W	.65PRL G120W
	.65PRL B	.65PRL BT60B	.65PRL BT75B	.65PRL G120B

ARTICOLO	DIN 51130 (R)	DIN 51097 (A+B+C)	BCR REP.CEC 6/81		DM 14/6/89 N.236		PENDULUM TEST BS (INGLESE)	PENDULUM TEST AS/NZS 4856:2004 (AUSTRALIANO)	PENDULUM TEST UNE ENV 12633:2003 (SPAGNOLO)	BOT 3000 (DCOF) AVERAGE VALUE
			g.a.	g.b.	c.a.	g.b.				
 .65PRL	R10	A	> 0,4	> 0,4	-	-	>25	>35	1	0,56

65°PARALLELO/

TECHNICAL SPECIFICATIONS PORCELAIN STONEWARE **UNI EN 14411 (ISO 13006) - Bla (appendice/ appendix G)**

	Specification	Test methods	Requirements in accordance to the standards	average value	
	DIMENSIONS AND APPEARANCE	ISO 10545-2	PROSPECT G.1	COMPLIANT	
	WATER ABSORPTION	ISO 10545-3	≤ 0,5%	≤ 0,1%	
	FLEXURAL RESISTANCE		min./MIH 35 N/mm²	> 45 N/mm²	
	MODULUS OF RUPTURE	ISO 10545-4	THICKNESS ≥ 7,5 mm: min. 700 N	THICKNESS*	8,5 mm* 2500 N*
					12 mm* 5000 N*
			THICKNESS < 7,5 mm: min. 1300 N		14 mm* 6500 N*
					20 mm** 11000 N**
	DEEP ABRASION RESISTANCE	ISO 10545-6	≤ 175 mm³	< 140 mm³	
	RESISTANCE TO SURFACE ABRASION	ISO 10545-7	CLASSES 0-5	AS INDICATED IN THE CATALOGUE	
	LINEAR EXPANSION THERMIC COEFFICIENT	ISO 10545-8	AVAILABLE ON REQUEST	≤ 7x10 ⁻⁶ °C ⁻¹	
	RESISTANCE TO SUDDEN TEMPERATURE CHANGES	ISO 10545-9	AVAILABLE ON REQUEST	RESISTANT	
	FROST RESISTANCE	ISO 10545-12	ALWAYS TESTED	RESISTANT	
	HOUSEHOLD CHEMICALS AND SWIMMING POOL WATER CLEANSERS		min. UB	min. UB	
			min. GB	min. GB	
			FROM ULA, ULB TO ULC	FROM ULA, ULB TO ULC	
	ACIDS AND LOW CONCENTRATION ALKALIS	ISO 10545-13	FROM GLA, GLB TO GLC	FROM GLA, GLB TO GLC	
	ACIDS AND HIGH CONCENTRATION ALKALIS		AVAILABLE ON REQUEST	AVAILABLE ON REQUEST	
	STAIN RESISTANCE	ISO 10545-14	AVAILABLE ON REQUEST	min. 3	
	COLOUR STABILITY TO LIGHT	DIN 51094	THEY DO NOT HAVE TO SHOW VISIBLE COLOUR ALTERATION	COMPLIANT	

THICKNESSES REFERRED TO 20X20 SIZE
THICKNESSES REFERRED TO 60X60 SIZE



MK.65PRL MIX

INDICATIONS FOR USE



Floor tiles



Wall tiles

SUGGESTED APPLICATIONS



Tiles for light commercial



Dometisc purpose



Tiles for heavy traffic area

SURFACES

Struttura / Structure



Slate cut

Finish



Natural

Surface look



Matt

Edge



Monocaliber, rectified

SHADE VARIATION

V2



SALES CHARACTERISTICS



Product sold per item.

All our products are sold only in complete boxes, whether the unit of measure is per item or per square metre.

