CROMIA

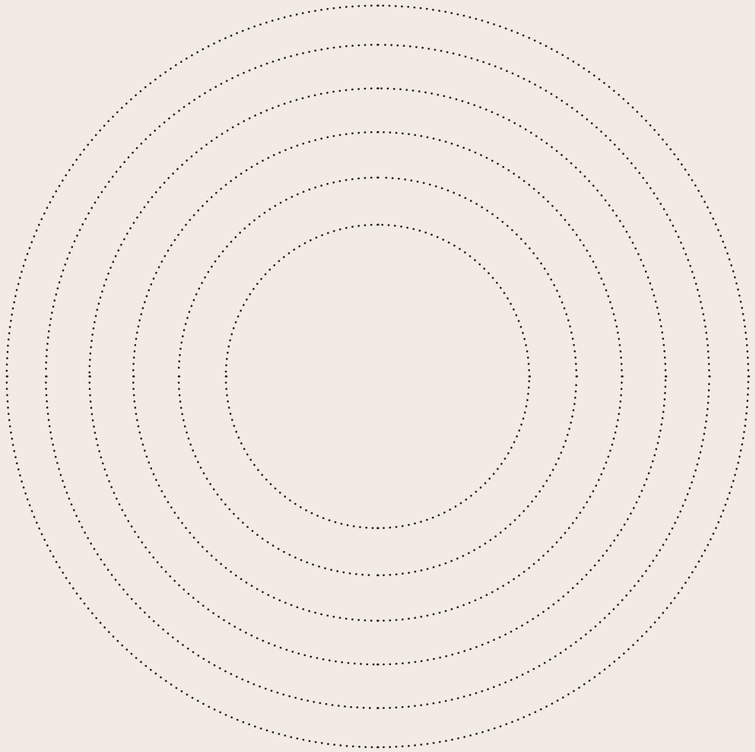

THORNTREE

CROMIA26

white body tiles

6,5X26,6CM
2.5"X10.5"

9MM

Monochromatic

cromia26 oro

cromia26 beige1, beige2, beige3

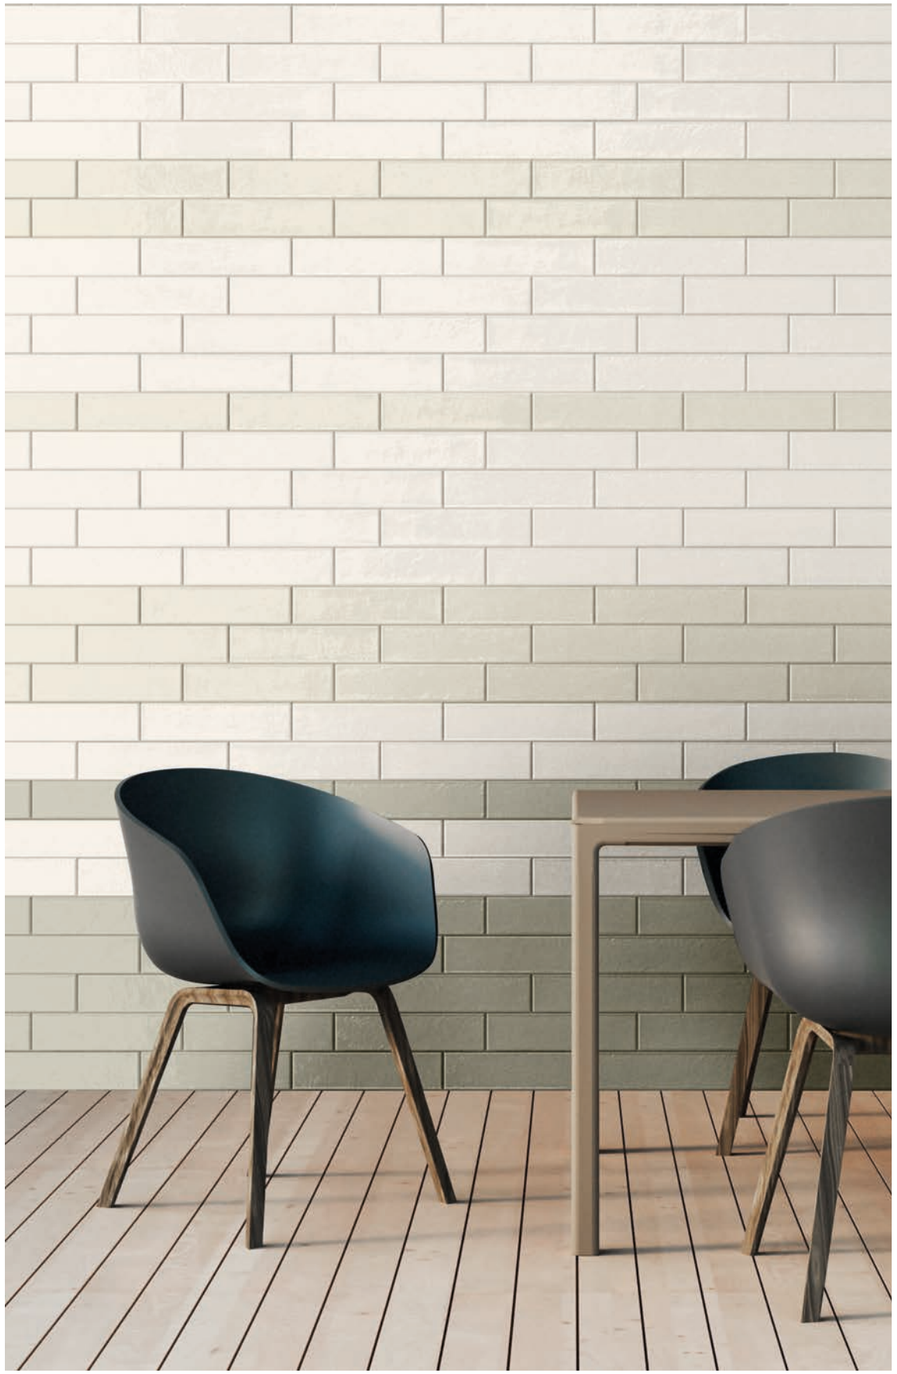

cromia26 beige1, verde1, verde2

cromia26 bronzo

CROMIA26

white body tiles

6,5X26,6CM
2.5"X10.5"

9MM

Monochromatic

grigio1, grigio2, grigio3, grigio4, grigio5

bianco lucido CRV106L ■02

6,5x26,6

beige1 lucido CRV107L ■02

6,5x26,6

bronzo CRV113L ■14

6,5x26,6

grigio1 lucido CRV101L ■02

6,5x26,6

beige2 lucido CRV108L ■02

6,5x26,6

oro CRV112L ■14



6,5x26,6

grigio2 lucido CRV102L ■02

6,5x26,6

beige3 lucido CRV109L ■02

6,5x26,6

acciaio CRV114L ■14

6,5x26,6

grigio3 lucido CRV103L ■02

6,5x26,6

verde1 lucido CRV110L ■02

6,5x26,6

grigio4 lucido CRV104L ■02

6,5x26,6

verde2 lucido CRV111L ■02

6,5x26,6

grigio5 lucido CRV105L ■05

6,5x26,6

WARNING: TILES WITH METALLIC COLORS:
Metallic colors are made with special glazes that tends to have a natural crackle effect and low resistance to acidic and alkaline cleaning products.Do not use aggressive cleaning products, such as bleach or ammonia. Check the installation and maintenance guide at pag.157

Special Pieces

jolly
1,2x26,6cm
0.5"x10.5"

bianco lucido	GVS533L	● 04	beige2 lucido	CRV534L	● 04
grigio1 lucido	GTD501L	● 04	beige3 lucido	CRV535L	● 04
grigio2 lucido	GTD502L	● 04	verde1 lucido	CRV536L	● 04
grigio3 lucido	CRV513L	● 04	verde2 lucido	CRV537L	● 04
grigio4 lucido	CRV514L	● 04	oro	CRV543L	● 08
grigio5 lucido	CRV515L	● 04	bronzo	CRV544L	● 08
beige1 lucido	CRV533L	● 04	acciaio	CRV547L	● 08



bullnose lineare
6,5x26,6cm
2.5"x10.5"

bianco lucido	CRV506L	● 01	beige2 lucido	CRV520L	● 01
grigio1 lucido	CRV501L	● 01	beige3 lucido	CRV521L	● 01
grigio2 lucido	CRV502L	● 01	verde1 lucido	CRV522L	● 01
grigio3 lucido	CRV503L	● 01	verde2 lucido	CRV523L	● 01
grigio4 lucido	CRV504L	● 01	oro	CRV524L	● 05
grigio5 lucido	CRV505L	● 01	bronzo	CRV525L	● 05
beige1 lucido	CRV519L	● 01	acciaio	CRV549L	● 05

Packing

ITEM	SIZE	PZ	MQ	KG	BOX
cromia26	6,5x26,6cm | 2.5"x10.5"	57	1,00	14,40	
bullnose lineare	6,5x26,6cm | 2.5"x10.5"	57	-	14,40	
jolly	1,2x26,6cm | 0.5"x10.5"	4	-	0,23	

ITEM	SIZE	BOX	PZ	MQ	KG	PALLET
cromia26	6,5x26,6cm | 2.5"x10.5"	50	2850	50	740	

TECHNICAL FEATURES

		glazed porcelain										
		standard	required standards	ALCHIMIA	FRAMMENTI	FUORICITTÀ	LEGNETTI	LOGICA	MINIMA8.6	MODULO	PIGMENTO	SUPERFICI20
dimensions	length and width	UNI-EN ISO 10545-2	± 0.6%	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant
	thickness	UNI-EN ISO 10545-2	± 5%	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant
	straightness of sides	UNI-EN ISO 10545-2	± 0.5%	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant
	rectangularity	UNI-EN ISO 10545-2	± 0.5%	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant
	surface flatness – warpage	UNI-EN ISO 10545-2	± 0.5%	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant
bending strenght	breaking of rupture	UNI-EN ISO 10545-4	> 1300 N (≥ 7,5 MM) > 700 N (< 7,5 MM)	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant
	modulus of rupture	UNI-EN ISO 10545-4	> 35 N/MM² (≥ 7,5 MM)	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant
resistance to abrasion of glazed tiles		UNI-EN ISO 10545-7	-	class 4 light colors class 3 dark colors	class 4 light colors class 3 dark colors	class 4 light colors class 3 dark colors	class 4 light colors class 3 dark colors	class 4 light colors class 3 dark colors	class 4 light colors class 3 dark colors	class 4 light colors class 2 dark colors	class 3 light colors class 2 dark colors	GRIGIO: 4 PERLA: 4 ANTRACITE: 3
water absorption		UNI-EN ISO 10545-3	≤ 0,5 %	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant
colour resistance to light		DIN 51094	-	resistant	resistant	resistant	resistant	resistant	resistant	resistant	resistant	resistant
linear thermal expansion coefficient (100° C)		UNI-EN ISO 10545-8	test method available	test method available	test method available	test method available	test method available	test method available	test method available	test method available	test method available	test method available
thermal shock resistance		UNI-EN ISO 10545-9	-	resistant	resistant	resistant	resistant	resistant	resistant	resistant	resistant	resistant
frost resistance		UNI-EN ISO 10545-12	-	resistant	resistant	resistant	resistant	resistant	resistant	resistant	resistant	resistant
crazing resistance		UNI-EN ISO 10545-11	-	resistant	resistant	resistant	resistant	resistant	resistant	resistant	resistant	resistant
resistance to stains		UNI-EN ISO 10545-14	CLASSE 3 MIN.	Class 5	Class 5	Class 5	Class 5	Class 5	Class 5	Class 5	Class 5	Class 3
chemical resistance		UNI-EN ISO 10545-13	GB MIN.	guaranteed (GA GLA GHA)	guaranteed (GA GLA GHA)	guaranteed (GA GLA GHA)	guaranteed (GA GLA GHA)	guaranteed (GA GLA GHA)	guaranteed (GA GLA GHA)	guaranteed (GA GLA GHA)	guaranteed (GA GLA GHA)	GB. MIN
lead and cadmium given off		UNI-EN ISO 10545-15	test method available	test method available	test method available	test method available	test method available	test method available	test method available	test method available	test method available	test method available
reaction to fire		EN 13501-1	-	$A1_{FL}$ -A1	$A1_{FL}$ -A1	$A1_{FL}$ -A1	$A1_{FL}$ -A1	$A1_{FL}$ -A1	$A1_{FL}$ -A1	$A1_{FL}$ -A1	$A1_{FL}$ -A1	$A1_{FL}$ -A1
slip resistance (ramp test)		DIN 51130	-	R9	R10	R10	R10	R9	R10	R9	R9	ROCCIA + CEMENTO: R10 SLATE + RIGA: R9
slip resistance (pendulum test)		BS 7976-2	-	36 WET	49 WET	FUORICITTÀ: 48 WET	44 WET	36 WET	32 WET	37 WET	37 WET	ROCCIA + CEMENTO: 50 WET SLATE + RIGA: 36 WET
slip resistance (pendulum test)		AS/NZS 4586	-	P3	P4	FUORICITTÀ: P3	P3	P3	P3	P3	P3	P3
wet dynamic coefficient of friction (DCOF)		ANSI A137.1-BOT 3000	≥ 0.42	0.68	compliant	compliant	compliant	compliant	compliant	compliant	compliant	compliant
shade variations		-	-	BIANCO - GRIGIO - NERO : V2 ELISIR : V2 ARS MIX : V3	V3	FUORICITTÀ : V3 CONFINI : V4	V4	BASE - CREA : V2 MIX - SEGMENTI: V3	UNI - CURVE : V2 MIX - MULTI : V4	V1	V3	CEMENTO : V2 ROCCIA - RIGA : V3 SLATE : V4

GLAZED PORCELAIN

Dry-pressed ceramic tiles with water absorption Eb ≤ 0,5 %. Quality specification, according to control test of EN14411:2013 appendix L group Bla GL