



slash

color care



SLASH

Slash is a double-fired tile generated by a careful study of enamels and a special 'color care' research system that divides modern colours into 'sparkling' and 'still'.

Slash: a new, contemporary ceramic project energised by colour.



SLASH

SPARKLE

lively, intense tones: the bright side of color


SLASH

STILL

delicate, neutral shades: the sensitive face of color

SLASH
SPARKLE

Red

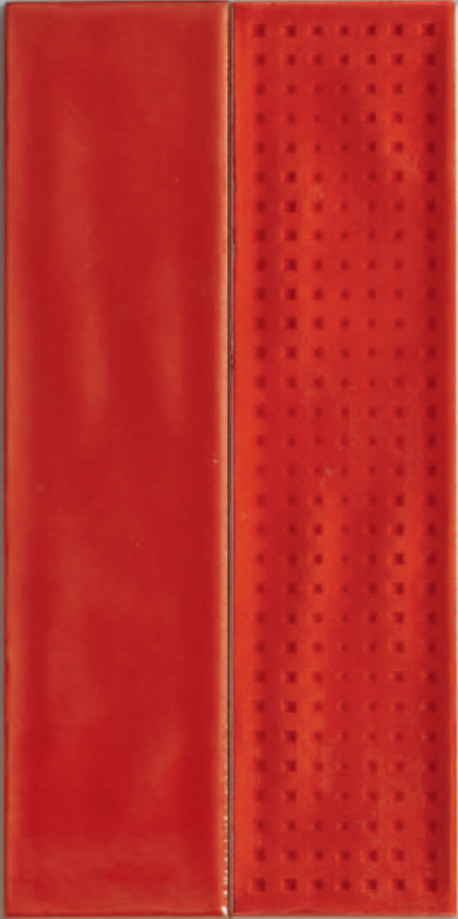

R

Turquoise



TQ

Apple Green



MV

Yellow



Y

White



W



Color



SLSH 73TQ / SLSH DK 73TQ

◀ SLSH 73TQ



SLSH 73R / SLSH DK 73R

SLSH 73R ►





SLSH 73W



SLSH 73Y / SLSH1 73Y

◀ SLSH 73MV / SLSH1 73MV

SLASH

STILL

White



W

Ecru




EC

Greige



GB

Robin's-egg Blue

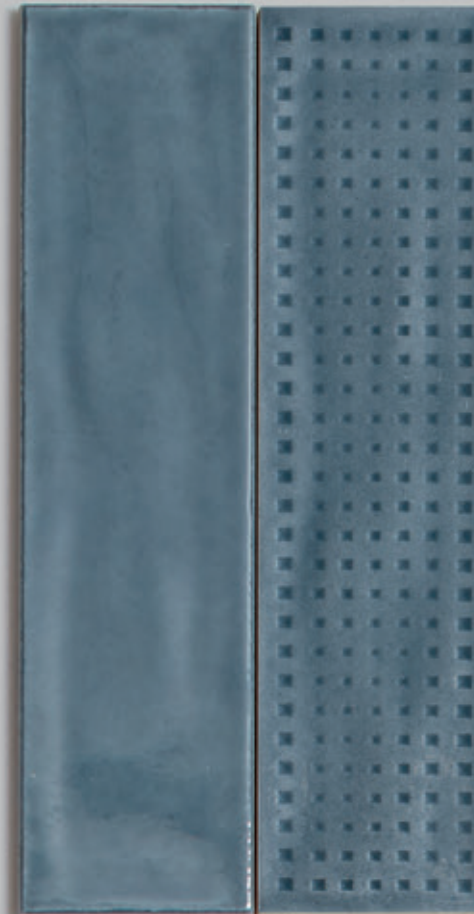

CZ

Sage



SV



CARE

SLSH 73W / SLSH1 73W



SLSH 73GB

SLSH 73EC ►






SLSH 73CZ / SLSH1 73CZ

◀ SLSH 73SV

sparkle

still

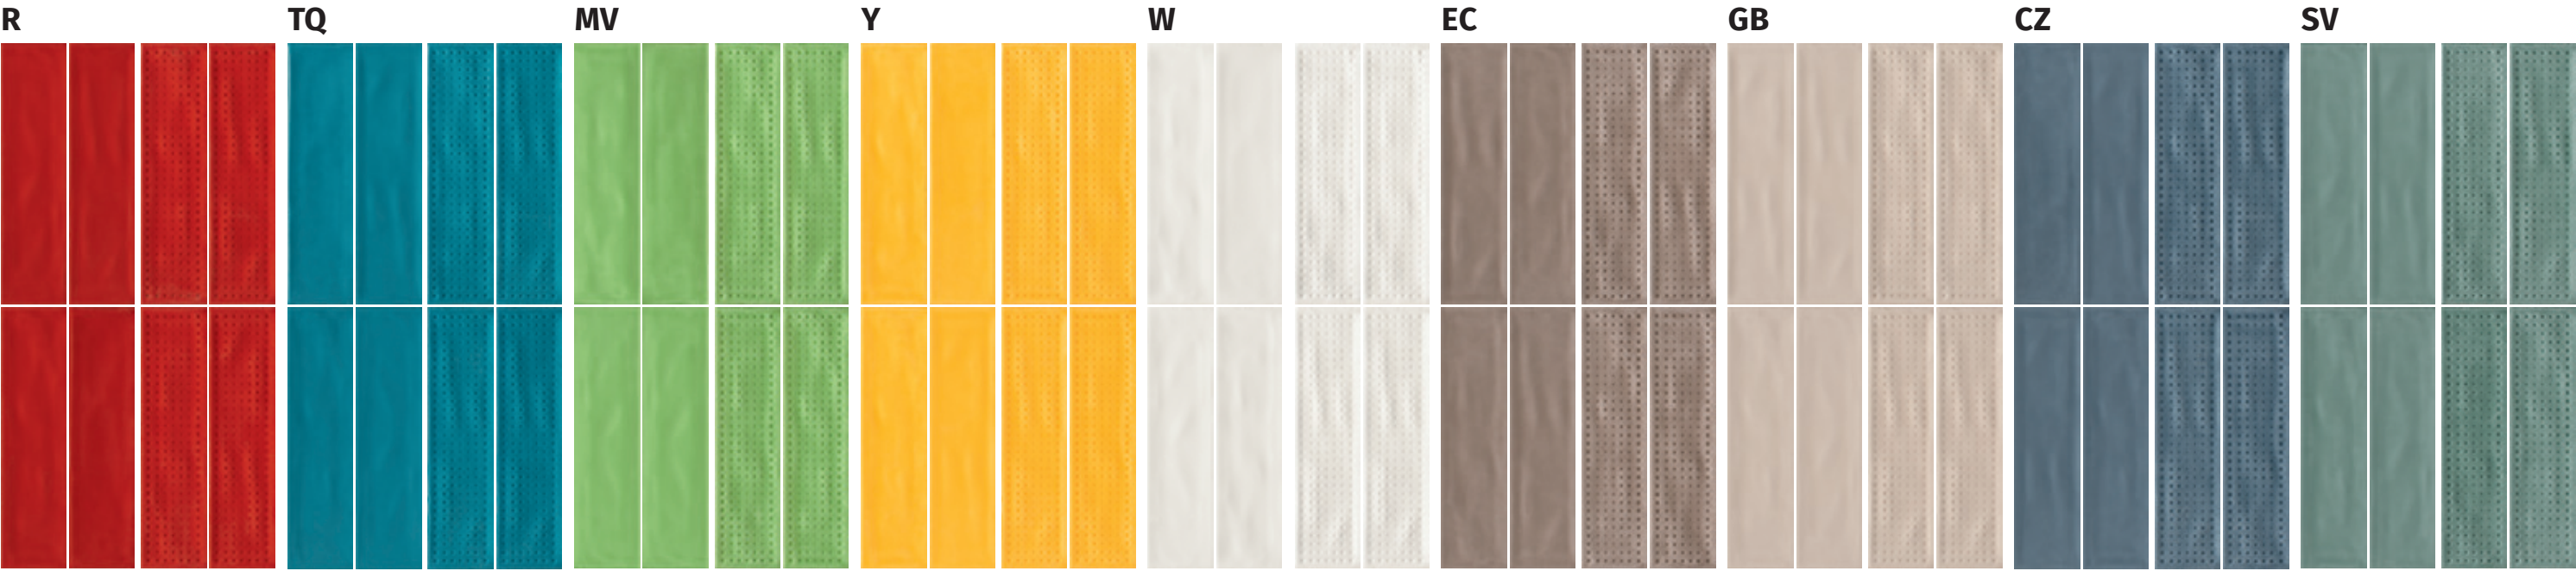

	 7,5x30-3"x12"	 7,5x30-3"x12"
R	SLSH 73R	SLSH1 73R
TQ	SLSH 73TQ	SLSH1 73TQ
MV	SLSH 73MV	SLSH1 73MV
Y	SLSH 73Y	SLSH1 73Y
W	SLSH 73W	SLSH1 73W


	 7,5x30-3"x12"	 7,5x30-3"x12"
W	SLSH 73W	SLSH1 73W
EC	SLSH 73EC	SLSH1 73EC
GB	SLSH 73GB	SLSH1 73GB
CZ	SLSH 73CZ	SLSH1 73CZ
SV	SLSH 73SV	SLSH1 73SV




SLSH DK 73R △
7,5x30-3"x12"



SLSH DK 73TQ △
7,5x30-3"x12"



SLSH DK 73MV △
7,5x30-3"x12"



SLSH DK 73Y △
7,5x30-3"x12"

	SPECIFICATION	TEST METHODS	REQUIREMENTS IN ACCORDANCE TO THE STANDARDS	AVERAGE VALUE
	DIMENSIONS AND APPEARANCE	ISO 10545-2	PROSPECT L.1	COMPLIANT
	WATER ABSORPTION	ISO 10545-3	> 10%	> 10%
	FLEXURAL RESISTANCE	ISO 10545-4	THICKNESS > 7,5 mm: min. 12 N/mm²	> 17 N/mm²
			THICKNESS ≤ 7,5 mm: min. 15 N/mm²	
	MODULUS OF RUPTURE		THICKNESS ≥ 7,5 mm: min. 600 N	COMPLIANT
			THICKNESS < 7,5 mm: min. 200 N	
	LINEAR EXPANSION THERMIC COEFFICIENT	ISO 10545-8	AVAILABLE ON REQUEST	≤ 7x10 ⁻⁶ °C ⁻¹
	RESISTANCE TO SUDDEN TEMPERATURE CHANGES	ISO 10545-9	AVAILABLE ON REQUEST	RESISTANT
	CRAZING RESISTANCE	ISO 10545-11	ALWAYS TESTED	RESISTANT
	HOUSEHOLD CHEMICALS AND SWIMMING POOL WATER CLEANSERS	ISO 10545-13	min. B	min. B
	ACIDS AND LOW CONCENTRATION ALKALIS		AVAILABLE ON REQUEST	AVAILABLE ON REQUEST
	ACIDS AND HIGH CONCENTRATION ALKALIS		AVAILABLE ON REQUEST	AVAILABLE ON REQUEST
	STAIN RESISTANCE	ISO 10545-14	min. 3	min. 3

SYMBOLS

INDICATIONS FOR USE

 Wall tiles

SUGGESTED APPLICATIONS

 Dometisc purpose

STRUCTURE

 Slate cut

FINISH

 Natural

SURFACE LOOK

 Glossy

SHADE VARIATION



SALES CHARACTERISTICS

 Product sold per item.

All our products are sold only in complete boxes, whether the unit of measure is per item or per square metre.

