TIDES HDPLANGE AND PORCELAIN FLOOR & WALL TILE







shwn on front: 28130 12x24 Sand Castle

Tides^{HDP} is a stylized interpretation of vein cut limestone known as "Georgette". It is a stunning play of tone-on-tone colors that creates a contemporary aesthetic. Using HDP-High Definition Porcelain® technology we are able to create a unique tonal blend within the veining to add interest and depth to each graphic.


This glazed porcelain floor and wall tile is available in pressed 12x24 and a rectified 3.75x12 in five color options: Sea Salt, Marine Fog, Sand Castle, Coconut Shell, and Waters Edge. shown: **28115 12x24** Marine Fog

Also featured in each color is a unique patterned 25-piece mosaic that rotates each chip 90 degrees creating a wonderful checkerboard pattern. A 3x24 bullnose completes the line.

Tides^{HDP} is appropriate for most applications in both residential and commercial settings. It is made in the USA in our Green Squared® certified Advanced Manufacturing Center in Lawrenceburg, KY, and includes pre-consumer recycled content. It meets the DCOF AcuTest® requirements to be installed in wet areas and is GREENGUARD® and Porcelain Tile certified.



SEA SALT

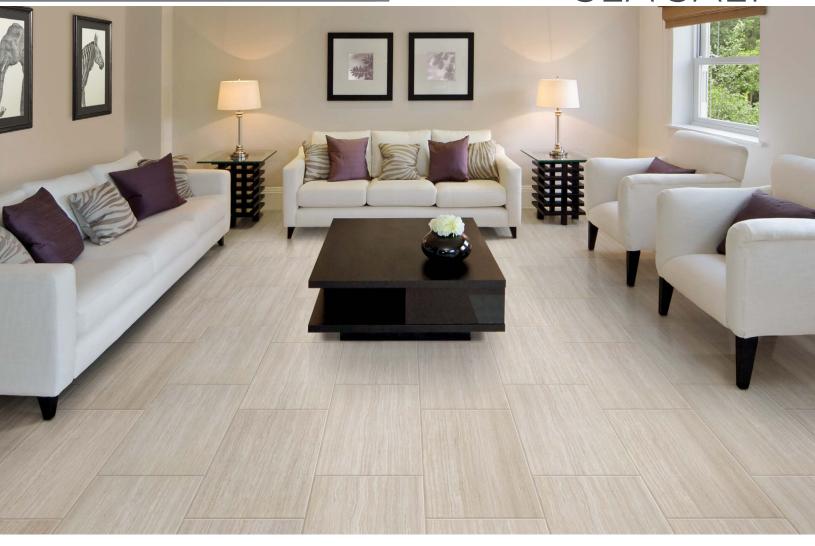

shown: **28110 12x24** Sea Salt



28110 3.75x12 Sea Salt




28110 12x24 Sea Salt



28110/M12 Sea Salt Mosaic

WATERS EDGE

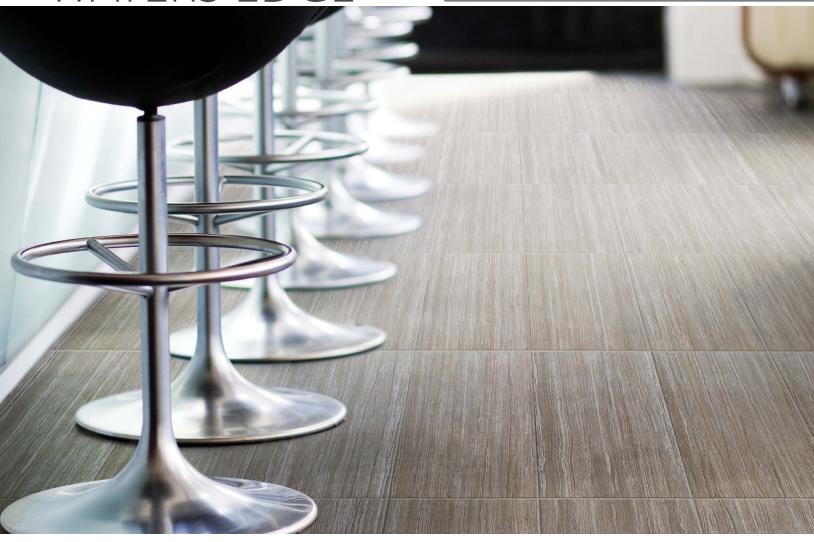

shown: 28155 12x24 Waters Edge



28155 3.75x12 Waters Edge




28155 12x24 Waters Edge



28155/M12Waters Edge Mosaic

MARINE FOG

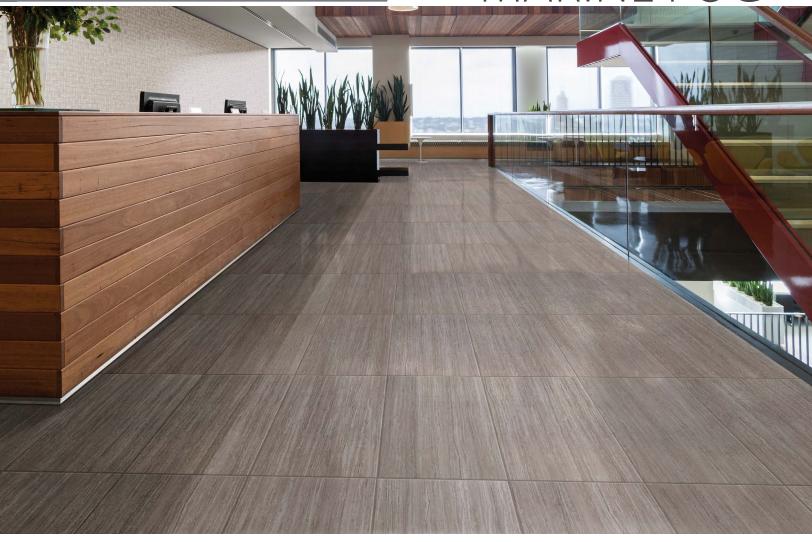

shown: **28115 12x24** Marine Fog



28115 3.75x12 Marine Fog



28115 12x24 Marine Fog



28115/M12Marine Fog Mosaic

COCONUT SHELL



shown: 28190 12x24 Coconut Shell



28190 3.75x12 Coconut Shell



28190 12x24 Coconut Shell



28190 /M12 Coconut Shell Mosaic

SAND CASTLE



shown: 28130 12x24 Sand Castle



28130 3.75x12 Sand Castle



28130 12x24 Sand Castle



28130/M12 Sand Castle Mosaic



shown: 28130 12x24 Sand Castle

Porcelain Technical Data Properties (Floor)	ASTM®	ANSI®	Results ¹
DCOF AcuTest®2	A137.1	≥ 0.42	Pass
Surface Hardness	Mohs Scale	N/A	7 Mohs
Break Strength	C-648	≥ 250 lbf.	≥ 510 lbf. avg.
Water Absorption	C-373	≤ 0.5%	≤ 0.5%³
Intended Use ⁴	N/A	N/A	Residential Light Commercial

¹Values are offered in good faith as being accurate and typical of normal production. Due to the natural variation of raw materials and manufacturing processes, the values of the purchased product for any particular installation may vary.

Typical Uses

Tides^{HDP} glazed porcelain floor and wall tile is appropriate for all residential and commercial wall, countertop, backsplash, and most floor applications.

Notice: Not all flooring products are suitable for wet areas, specialized applications, or commercial use. Please refer to the American National Standard Specifications for Ceramic Tile (ANSI® A137.1) for ceramic, stone, and glass installation for specific usage and installation information.

This product will contribute to USGBC LEED® points and the ANSI® approved NAHB® Green Building Points.

Color reproductions in this printed piece may vary from actual tile colors. Final selection should be made from actual tile samples.

Color, texture, and finish variations may occur due to the nature of the product.

Field Tile Nominal Size (in) ¹	Metric (cm)	Pcs./Sq Ft ²	Thickness ³	Edge
3.75x12	9.5x30	3.27	10mm	Rectified
12x24	30x60	.5	10mm	Pressed

¹These values may vary from lot to lot.

³ May not apply to textured surfaces or tiles with uneven back patterns such as mesh mounted mosaics.

Trim	Shape	Sku	Nominal Size (in)	Metric (cm)
Bullnose		P43N9	3x24	7.5x60

¹These values may vary from lot to lot.



















 $^{^2}$ ANSI $^\circ$ A137.1 standard, ceramic tiles selected for level interior spaces expected to be walked upon when wet must have a minimum wet DCOF AcuTest $^\circ$ value of 0.42.

³ Average production value.

²These values are based on actual sizes including the grout joint.