

BOARD

STONE TALES

COMPACT

COLLECTION CATALOGUE



STONE TALES


BOARD

Board collection shows with five nuances the material mood and the texture of the natural slate reproduced with the perfection of the ceramic technology.




1 SIZES

60.4 x 120.8 60.4 x 90.6 60.4 x 60.4
30.2 x 60.4 15.1 x 60.4 10 x 60.4 5 x 60.4

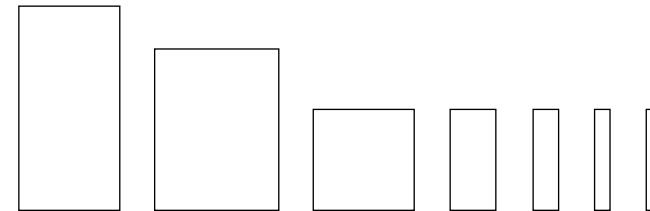


2 DECORS

MOSAIC & MURALES



5 COLOURS

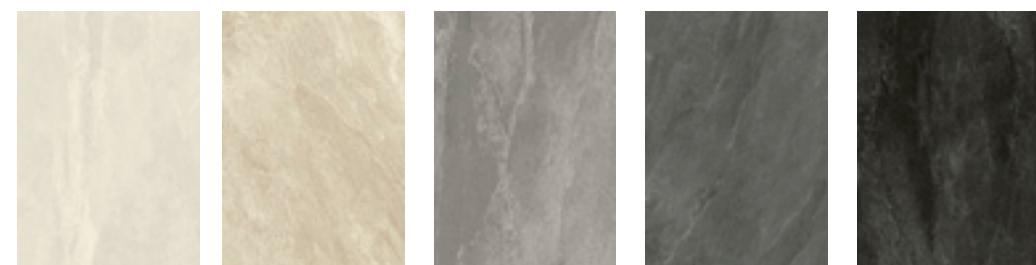

CHALK

PAPER

DUST

GRAPHITE

INKWELL



BOARD - GRAPHITE

60.4 x 90.6 + 60.4 x 60.4 + 30.2 x 60.4
24" x 36" + 24" x 24" + 12" x 24"


COLOUR BOARD

A 5 colours palette of muted and refined greys and whites to enhance the expressive wealth of the material.

CHALK



PAPER



DUST



GRAPHITE



INKWELL





BOARD - GRAPHITE
60.4 x 90.6 + 60.4 x 60.4 + 30.2 x 60.4
24" x 36" + 24" x 24" + 12" x 24"



GRAPHITE



BOARD - GRAPHITE

60.4 x 90.6 24" x 36"

BOARD - GRAPHITE

60.4 x 90.6 + 60.4 x 60.4 + 30.2 x 60.4
24" x 36" + 24" x 24" + 12" x 24"



MOOD BOARD

The natural surface gives the product an exclusive character and an unique tactile feeling, ideal for indoor and outdoor public spaces and private places.

BOARD - PAPER
60.4 x 60.4 24" x 24"



BOARD - PAPER
60.4 x 60.4 24" x 24"



PAPER

STONE TALES



BOARD - PAPER
60.4 x 60.4 24" x 24"

BOARD





wall
BOARD - CHALK
 $15.1 \times 60.4 + 10 \times 60.4 + 5 \times 60.4$
 $6'' \times 24'' + 4'' \times 24'' + 2'' \times 24''$

floor
BOARD - CHALK
 $60.4 \times 120.8 \quad 24'' \times 48''$

CHALK



wall_
BOARD - CHALK
 $15.1 \times 60.4 + 10 \times 60.4 + 5 \times 60.4$
 $6'' \times 24'' + 4'' \times 24'' + 2'' \times 24''$

floor_
BOARD - CHALK
 $60.4 \times 120.8 \quad 24'' \times 48''$



BOARD - CHALK
60.4 x 120.8 24" x 48"



BOARD - DUST
60.4 x 90.6 24" x 36"



DUST



BOARD - DUST
60.4 x 90.6 24" x 36"





SIZE BOARD

A choice of 7 different sizes gives to Board collection an infinite assortment of combinations, to fulfil versatility in laying pattern and use.

wall_

BOARD - DUST

60.4 x 90.6 + 60.4 x 60.4
24" x 36" + 24" x 24"

floor_

BOARD - INKWELL


60.4 x 120.8 24" x 48"



INKWELL



BOARD - INKWELL
60.4 x 120.8 24" x 48"

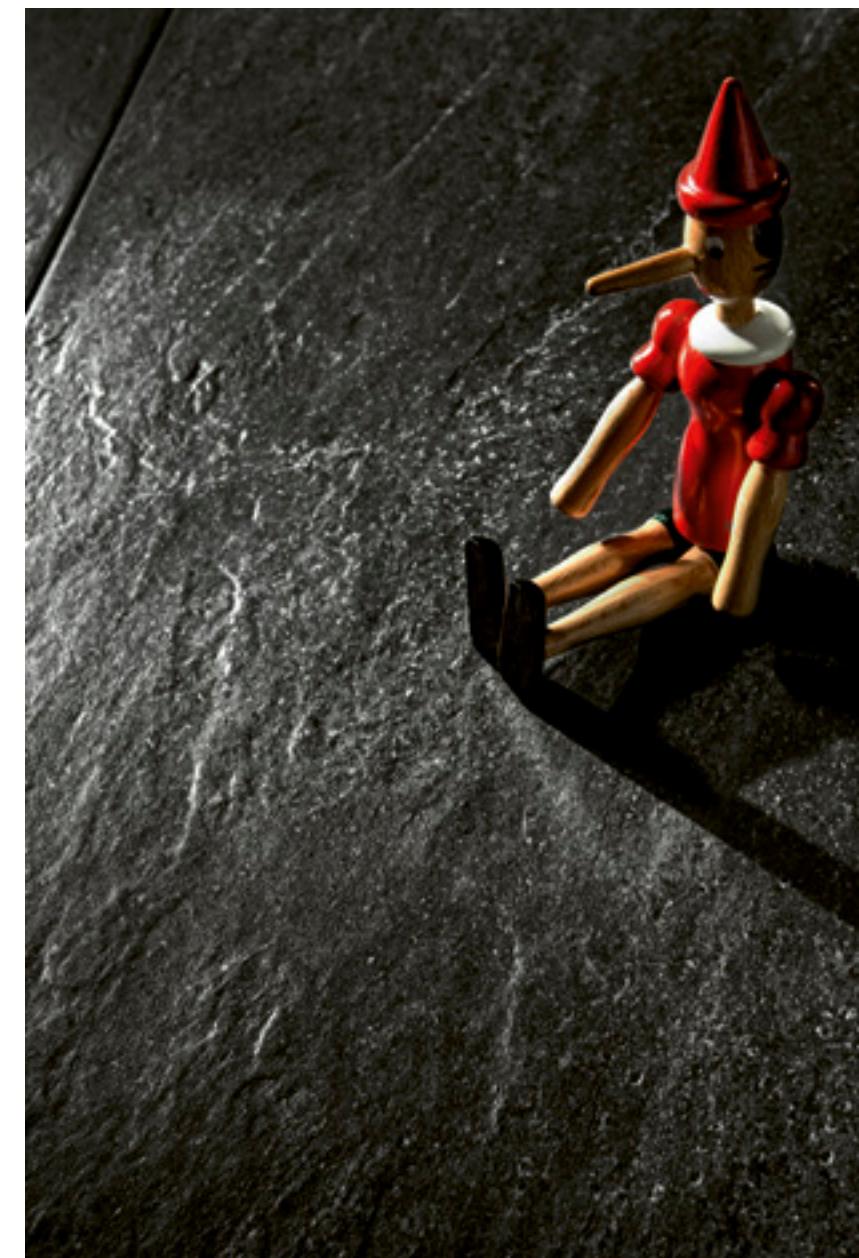

wall_
BOARD - DUST
 $60.4 \times 90.6 + 60.4 \times 60.4$
 $24" \times 36" + 24" \times 24"$

floor_
BOARD - INKWELL
 $60.4 \times 120.8 \quad 24" \times 48"$

TECHNICAL BOARD



COLOURS & DECORS

COLOURS



CHALK


PAPER



DUST




GRAPHITE

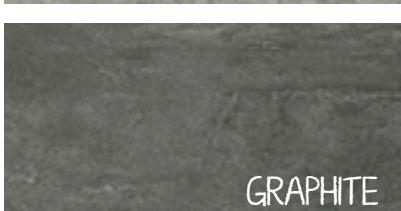




INKWELL




MOSAICS



MURALES

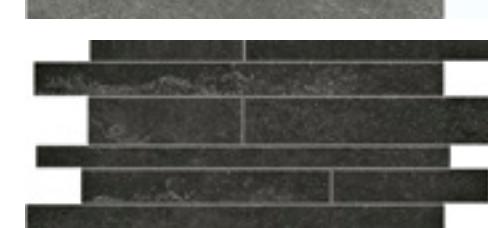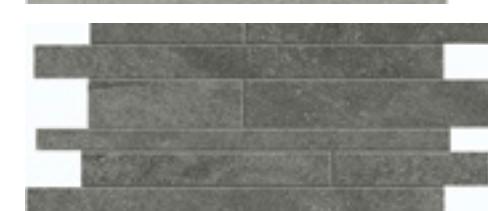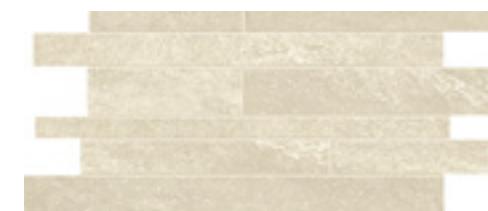


LAYOUT




formati:

60.4 x 60.4 24" x 24" (1pz.) 50 %
30.2 x 60.4 12" x 24" (2pz.) 50 %




formati:

60.4 x 60.4 24" x 24" (3pz.) 66.6 %
30.2 x 60.4 12" x 24" (3pz.) 33.3 %




formati:

60.4 x 90.6 24" x 36" (5pz.) 42 %
60.4 x 60.4 24" x 24" (7pz.) 39 %
30.2 x 60.4 12" x 24" (7pz.) 19 %




formati:

60.4 x 90.6 24" x 36" 50 %
60.4 x 60.4 24" x 24" 33.33 %
30.2 x 60.4 12" x 24" 16.66 %



formati:

30.2 x 60.4 12" x 24" (2pz.) 80 %
15.1 x 60.4 6" x 24" (1pz.) 20 %




formati:

30.2 x 60.4 12" x 24" (6pz.) 33.3 %
15.1 x 60.4 6" x 24" (6pz.) 66.6 %

for rectified material, we recommend a 2 mm grout at least when using one size only and a 3 mm grout for multisizes laying


TECHNICAL INFORMATION & PLUS

SIZES

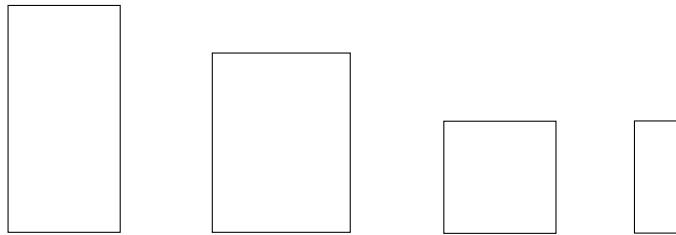

RETTIFICATO **RETTIFICATO | GRIP** **RETTIFICATO** **RETTIFICATO** **RETTIFICATO**


60.4 x 120.8
24" x 48" **66** 60.4 x 90.6
24" x 36" **59** **60** 60.4 x 60.4
24" x 24" **54** 30.2 x 60.4
12" x 24" **51** 15.1 x 60.4
6" x 24" **66**

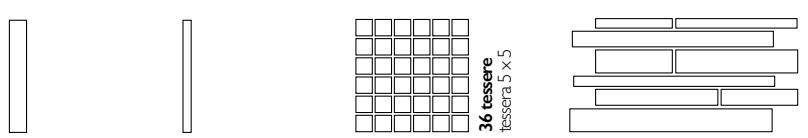

RETTIFICATO **RETTIFICATO** **MOSAICO** **MURALES**

10 x 60.4
4" x 24" **66** 5 x 60.4
2" x 24" **68** 30.2 x 30.2
12" x 12" **115** 30.2 x 60.4
12" x 24" **36**

2THICK_20 MM

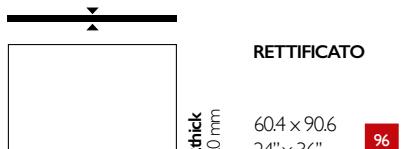

RETTIFICATO

for all informations concerning special pcs, laying solutions and technical features please refers to the 2thick catalogue.

SPECIAL ITEMS



TECHNICAL FEATURES

standards	characteristics or properties	declared values
	ISO 10545-3 assorbimento d'acqua water absorption	<0.5%
	ISO 10545-4 resistenza alla flessione (R) breaking strength	>35 N/mm²
	ISO 10545-13 resistenza agli acidi resistance to acid	GLA
	ISO 10545-12 resistenza al gelo frost resistance	resiste frost proof
	ISO 10545-14 resistenza alle macchie stain resistance	4
	ISO 10545-2 planarità surface flatness	±0.5%
	spessore thickness	10 mm
	DIN 51097 DIN 51130 DCOF BOT 3000 NATURALE	coefficiente d'attrito (scivolosità) static coefficient of friction
	DIN 51097 DIN 51130 DCOF BOT 3000 GRIP	coefficiente d'attrito (scivolosità) static coefficient of friction
	V3 var. moderata V3 moderate var.	variazioni cromatiche color shade

PACKING

mm inch	spessore thickness	pezzi/sc pcs/box	mq/sc sqm/box	kg/sc kgs/box	sc/pl box/pal	mq/pl sqm/pal	kg/pl kgs/pal
60.4 x 120.8 rettificato	10	2	1.46	30.53	35	51.10	1068.55
60.4 x 90.6 rettificato grip	10	3	1.64	33.70	32	52.51	1078.40
60.4 x 90.6 2thick_20mm rettificato	20	1	0.55	23.76	48	26.40	1140.48
60.4 x 60.4 rettificato	10	4	1.46	31.40	30	43.80	942.00
30.2 x 60.4 rettificato	10	6	1.09	23.00	40	43.76	920.00
5 x 60.4 rettificato	10	32	0.97	19.08	48	46.37	915.84
10 x 60.4 rettificato	10	16	0.97	20.30	48	46.37	974.40
15.1 x 60.4 rettificato	10	11	1.00	20.58	48	48.00	987.84
30.2 x 30.2 mosaico	11	1.00	19.00	36	36.00	36.00	684.00
30.2 x 60.4 murales	5		19.78				
7 x 60.4 battiscopa smaltato rettificato	12		10.32				
7 x 90.6 battiscopa smaltato rettificato	8		10.24				
30.2 x 60.4 gradino rettificato	8		31.60				
30.2 x 90.6 gradino rettificato grip	4		23.80				
30.2 x 60.4 x 4 gradone costa retta rettificato	4		20.40				
30.2 x 90.6 x 4 gradone costa retta rettificato grip	2		15.00				
30.2 x 30.2 x 4 gradone angolare costa retta dx sx rettificato	2		6.20				
30.2 x 90.6 x 4 gradone angolare costa retta dx sx rett. grip	1		8.20				
30.2 x 60.4 x 5 elemento a L rettificato	4		18.80				
30.2 x 90.6 x 5 elemento a L rettificato grip	2		13.90				



green

The company is committed to the continued technological innovation of its processes to create products that increasingly meet the demands of the market and focus on:

- reduced energy consumption in production processes;
- reduced emissions into the air and water;
- improving consumer awareness and waste management.

To curb its environmental impact, UNICOMSTARKER has taken the following steps:


- manufacturing rejects are fully managed and reused;
- all the production units are equipped with a closed-circuit water purification plant with total recovery of liquid discharges coming from the production cycle and no discharges into the environment;
- emissions of gases are authorised by the competent authority, pollutant abatement systems are fitted and undergo periodic checks to verify they comply with the current laws;
- industrial waste is disposed of in compliance with the community directives;
- packaging is sent off to be recycled and reused;
- the acoustic impact on the environment is toned down via the use of suitable technologies.

The ceramic tiles produced are:

- a long-lasting product
- recyclable at the end of their use



The content of this catalogue is only indicative and not exhaustive in respect of graphics, decorations, colours, packaging and sizes

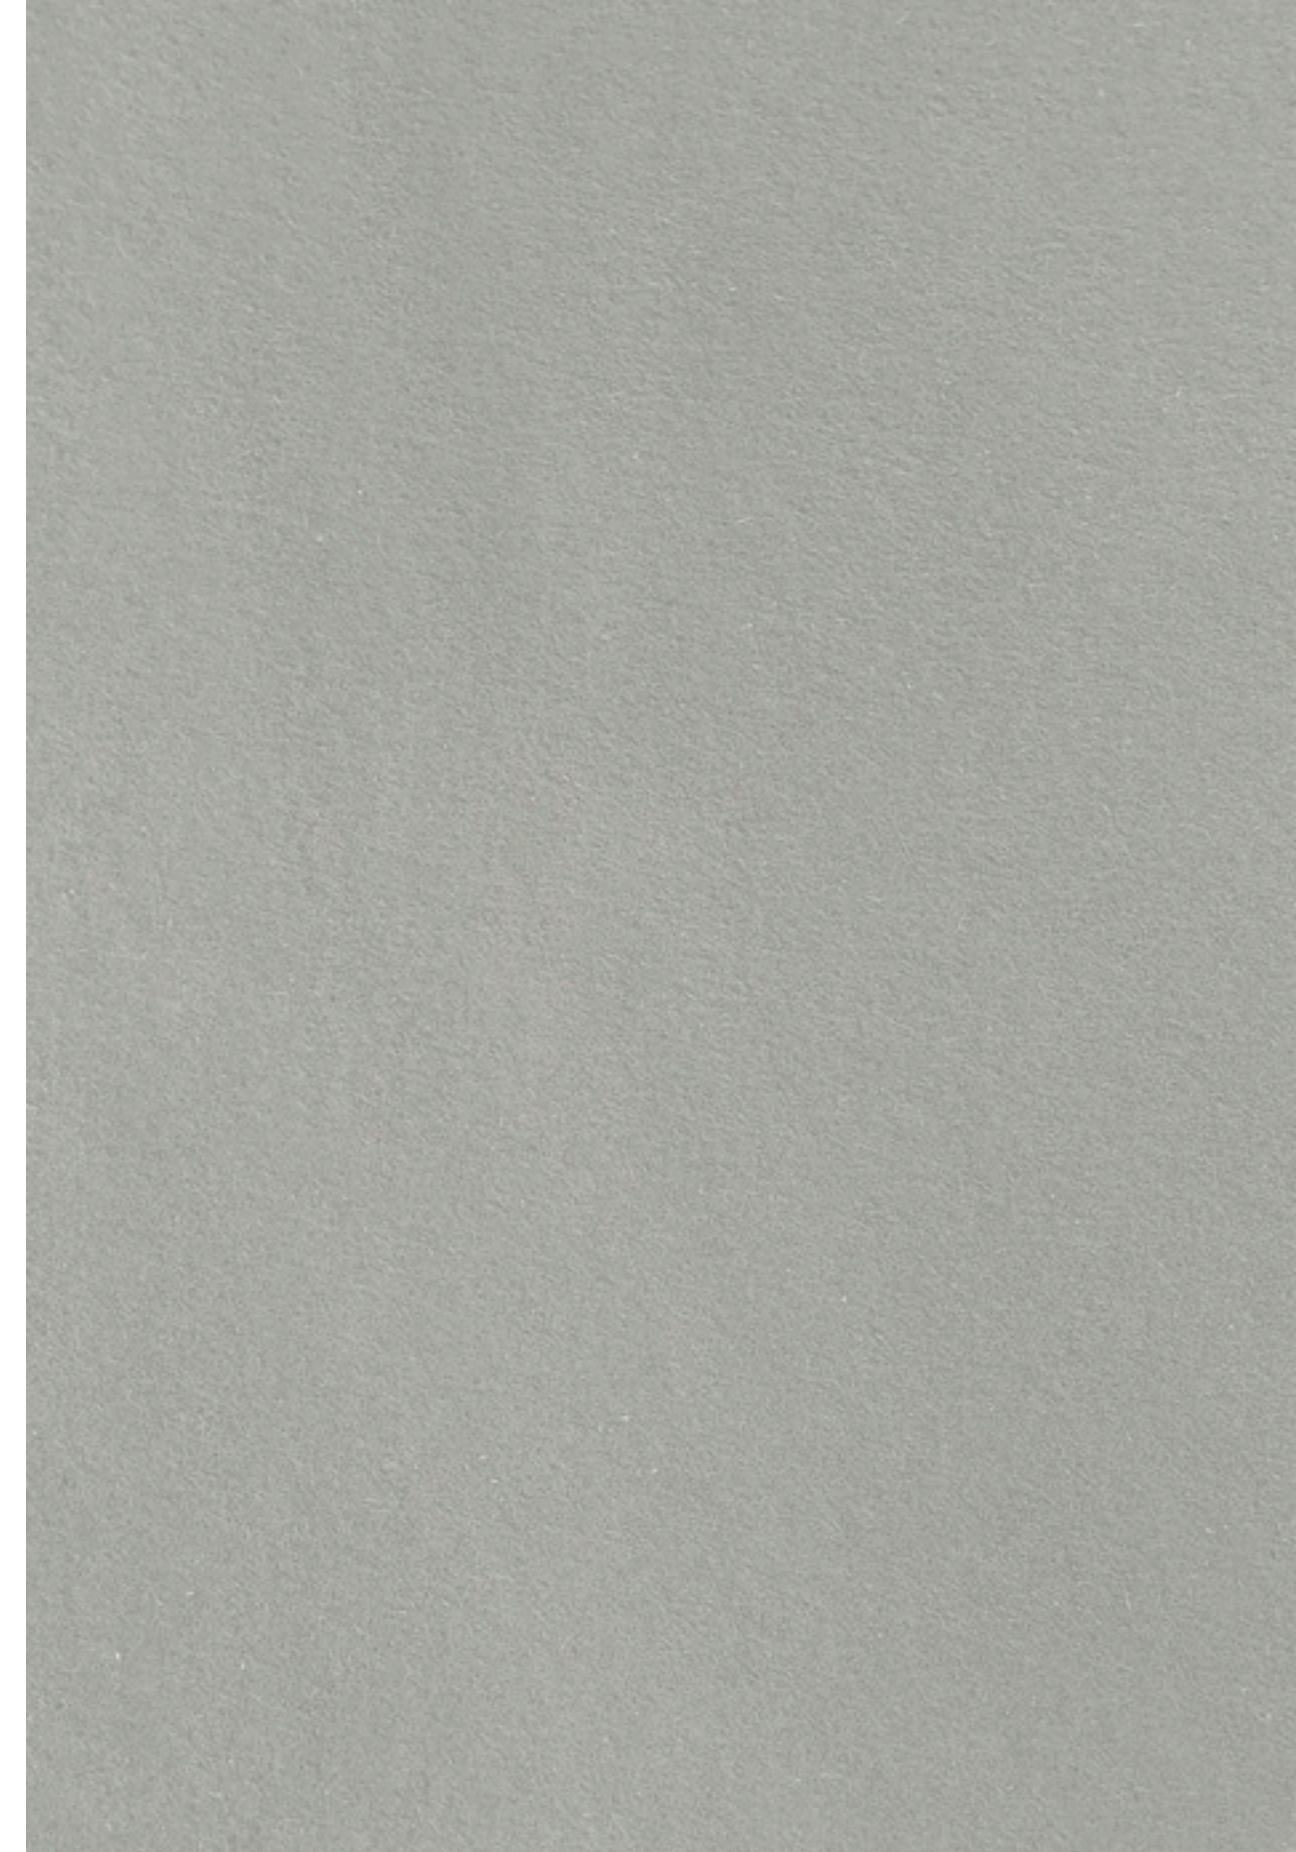

**think
outside
the box**

