

stage 2.0

EVOLVED MATTER

COMPACT

COLLECTION CATALOGUE



EVOLVED MATTER

stage 2.0



stage 2.0

Preserves the more sophisticated, handcrafted aspects of the matter.

The elegance of the colours is reflected in choosing to keep the classic and natural tones rich in contrasts and veining applying them to the new rectified 20x120 size.

Wood retains its expressive power in this new contemporary interpretation.



produzione - production

industriale - industrial

spessore - thickness

9.5 mm

usi - use

interni residenziali, bagni o locali commerciali e spazi pubblici
housing environments, bathrooms or refined commercial locations
as well as public spaces.

formati - sizes

20 x 120



complementary pieces

gradone - gradone angolare - elemento a L - battiscopa smaltato



STAGE 2.0 BROADWAY
20 x 120 - 8" x 48"

BROADWAY



STAGE 2.0 BROADWAY
20 x 120 - 8" x 48"







ROYAL







12

EVOLVED MATTER

STAGE 2.0 OPERA
20 × 120 - 8" × 48"



OPERA




LA SCALA







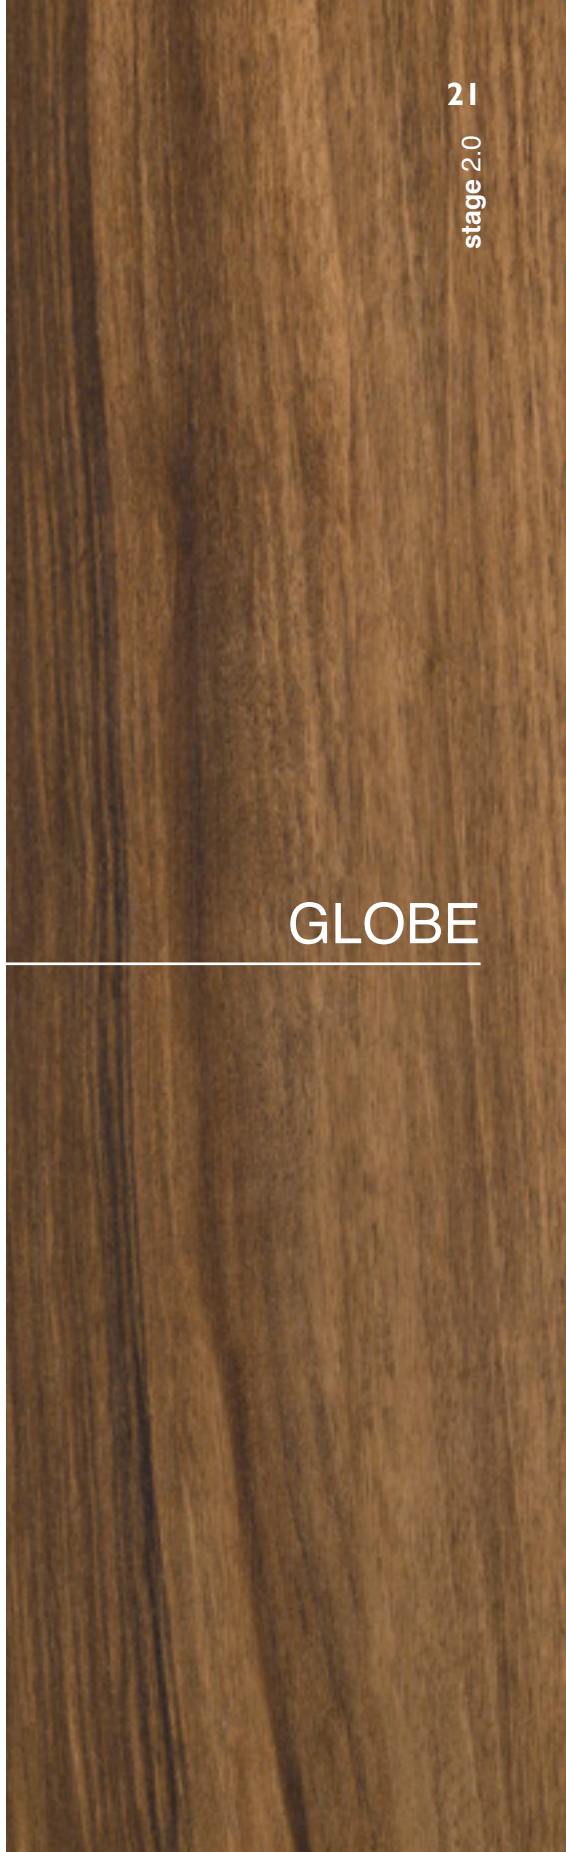

GLOBE





24

EVOLVED MATTER



STAGE 2.0 METROPOLITAN
20 x 120 - 8" x 48"



METROPOLITAN








TECHNICAL DATA

COLORI - COLOURS

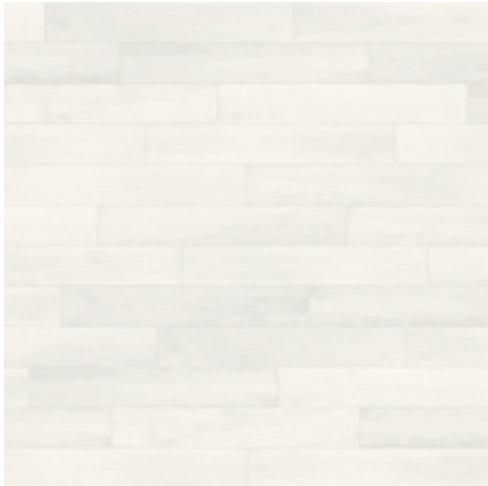

BROADWAY



ROYAL




OPERA



LA SCALA



GLOBE

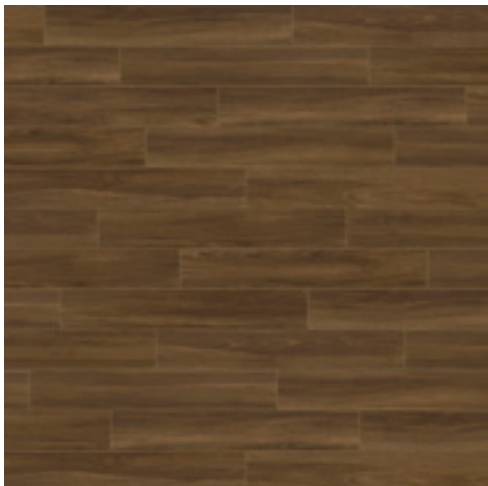

METROPOLITAN

TECHNICAL INFORMATION & PLUS

SIZES



RETTIFICATO

20 x 120
8" x 48"

66

SPECIAL ITEMS



BATTISCOPA SMALTATO

6.5 x 60
2 9/16" x 24"

18



ELEMENTO A L

20 x 60 x 5
8" x 24" x 2"

50



GRADONE COSTA RETTA

20 x 60 x 3,2
8" x 24" x 1,26"

115




GRADONE ANGOLARE COSTA RETTA DX/SX

20 x 60 x 3,2
8" x 24" x 1,26"


140




LAYING SOLUTION




20 x 120 8" x 48" 100 %




20 x 120 8" x 48" 100 %



20 x 120 8" x 48" 100 %



20 x 120 8" x 48" 100 %



20 x 120 8" x 48" 100 %

	standards	characteristics or properties	declared values
	ISO 10545-3	water absorption	< 0.5%
	ISO 10545-4	breaking strength	35 N/mm ²
	ISO 10545-13	resistance to acid	GLA
	ISO 10545-12	frost resistance	resiste frost proof
	ISO 10545-7	resistance against abrasion (PEI)	V
	ISO 10545-14	stain resistance	5
	ISO 10545-2	surface flatness	± 0.5%
	ISO 10545-2	thickness	9.5 mm
	DIN51097 DIN51130 DCOF BOT 3000	static coefficient of friction	A R10 > 0.42
		color shade variations	V2 slight variation
	ISO 10545-2	orthogonality	± 0.6%

PACKING

mm	inch		thickness	pcs/box	sqm/box	kgs/box	box/pal	sqm/pal	kgs/pal
20x120	8"x48"	rettificato	9.5	4	0.96	21.06	40	38.40	842.40
20x60x3,2	8"x24"x1,26"	gradone costa retta		4		12.80			
20x60x3,2	8"x24"x1,26"	gradone angolare costa rett. dx/sx		2		6.60			
20x60x5	8"x24"x2"	elemento a L		4		12.60			
6.5x60	29/16"x24"	battiscopa smaltato		20		23.08			



Ceramics of Italy

The content of this catalogue is only indicative and not exhaustive in respect of graphics, decorations and colours.

think
outside
the box

