

WOODEN

EVOLVED MATTER

COMPACT

COLLECTION CATALOGUE



EVOLVED MATTER

WOODEN

*Wood meets contemporary architecture:
surfaces that infuse warmth,
spaces where light blends with living.*






5
WOODEN

Six colors in two sizes: Wooden stands out for its formal essentiality characterized by classic and minimal, sober and linear notes.


A - Maple, B - Willow, C - Aspen, D - Birch, E - Olive, F - Elm



WOODEN WILLOW

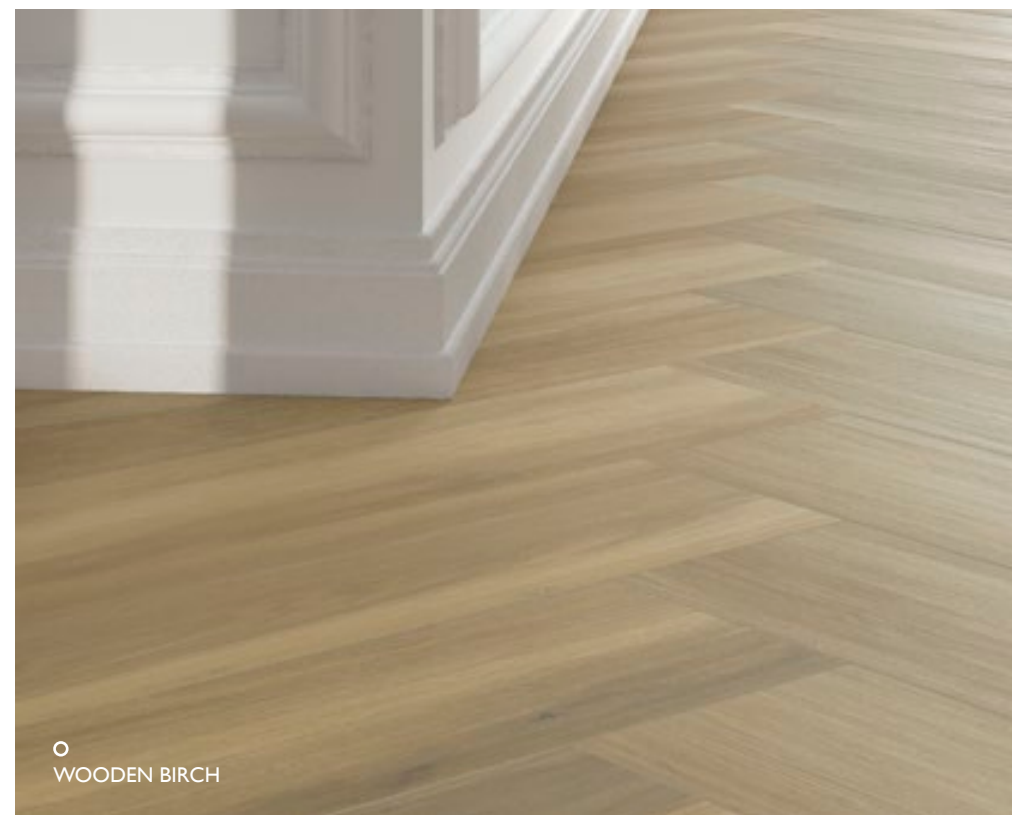

WOODEN BIRCH

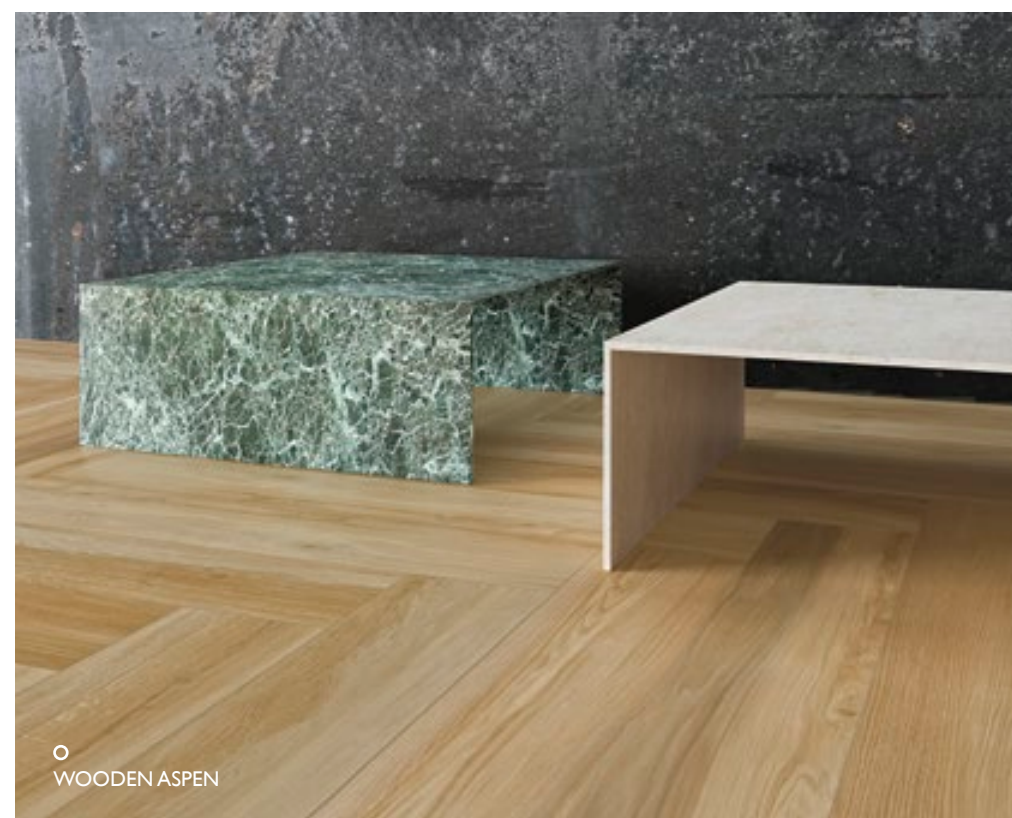

WOODEN ASPEN



WOODEN

COLLECTION



produzione - production

industriale - industrial

spessore - thickness

9,5 mm

usi - use

interni residenziali, bagni o locali commerciali e spazi pubblici
housing environments, bathrooms or refined commercial
locations as public spaces.

formati - sizes

20 x 119,5 - 30 x 119,5



decori - decoration

mosaico


pezzi speciali - complementary pieces

gradone - gradone angolare - elemento a L - battiscopa smaltato







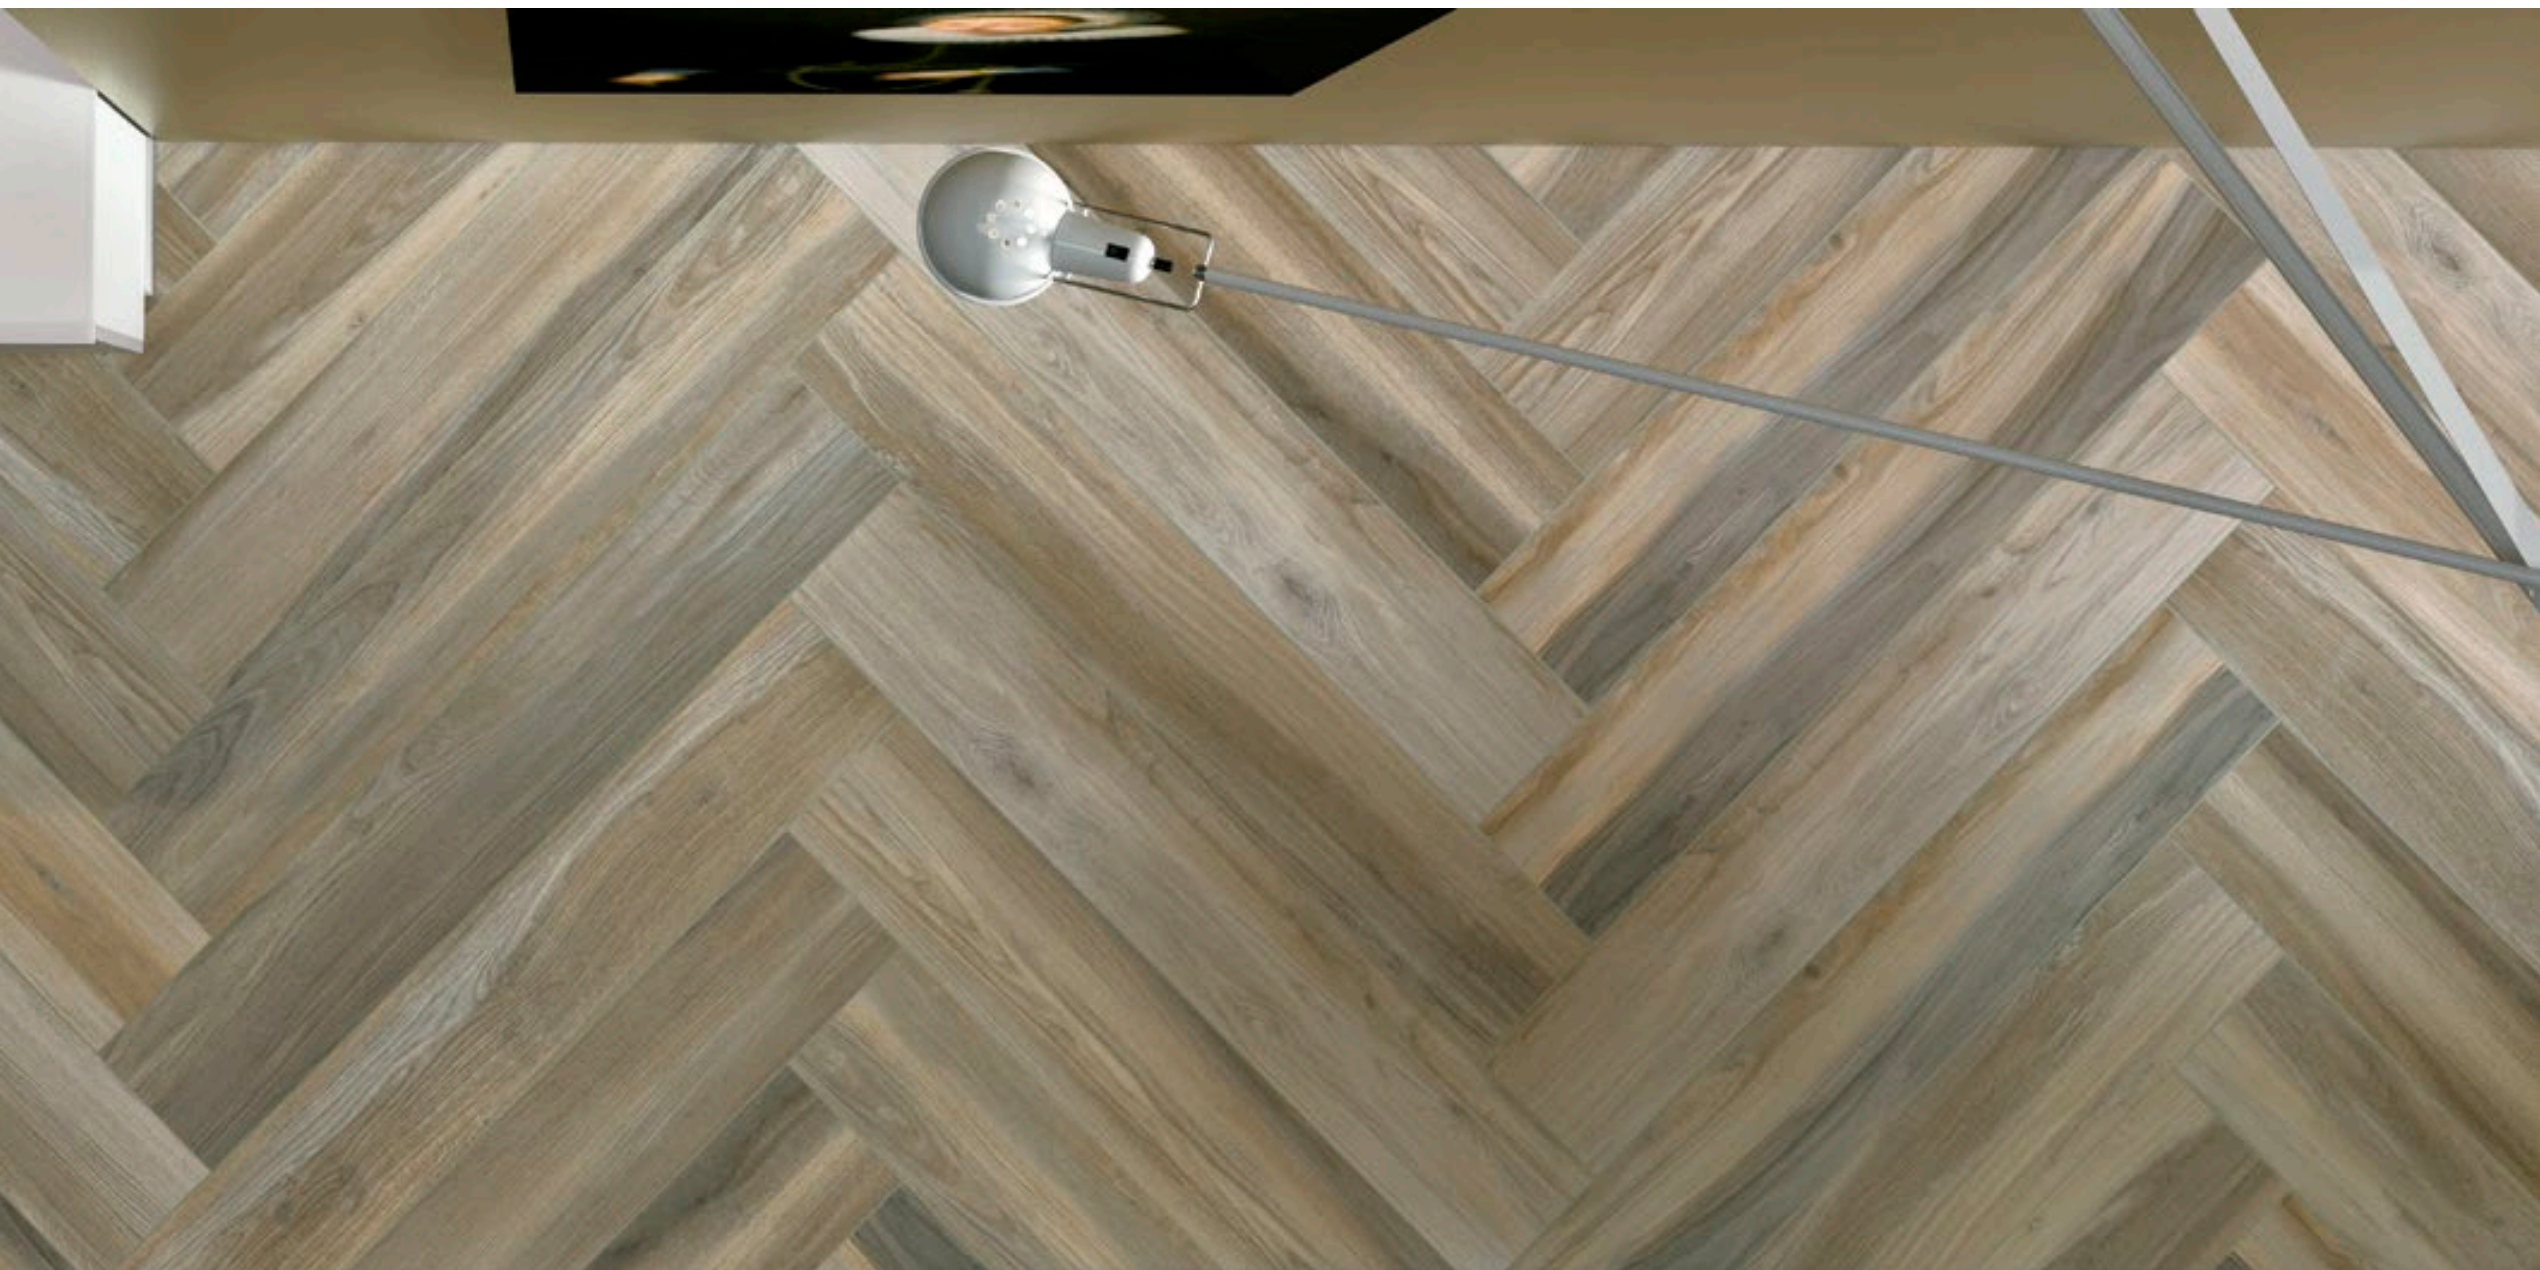








Wooden maple
20 x 119.5 - 8" x 48"



○
WOODEN MAPLE
20 x 119.5, 30 x 119.5 - 8" x 48", 12" x 48"

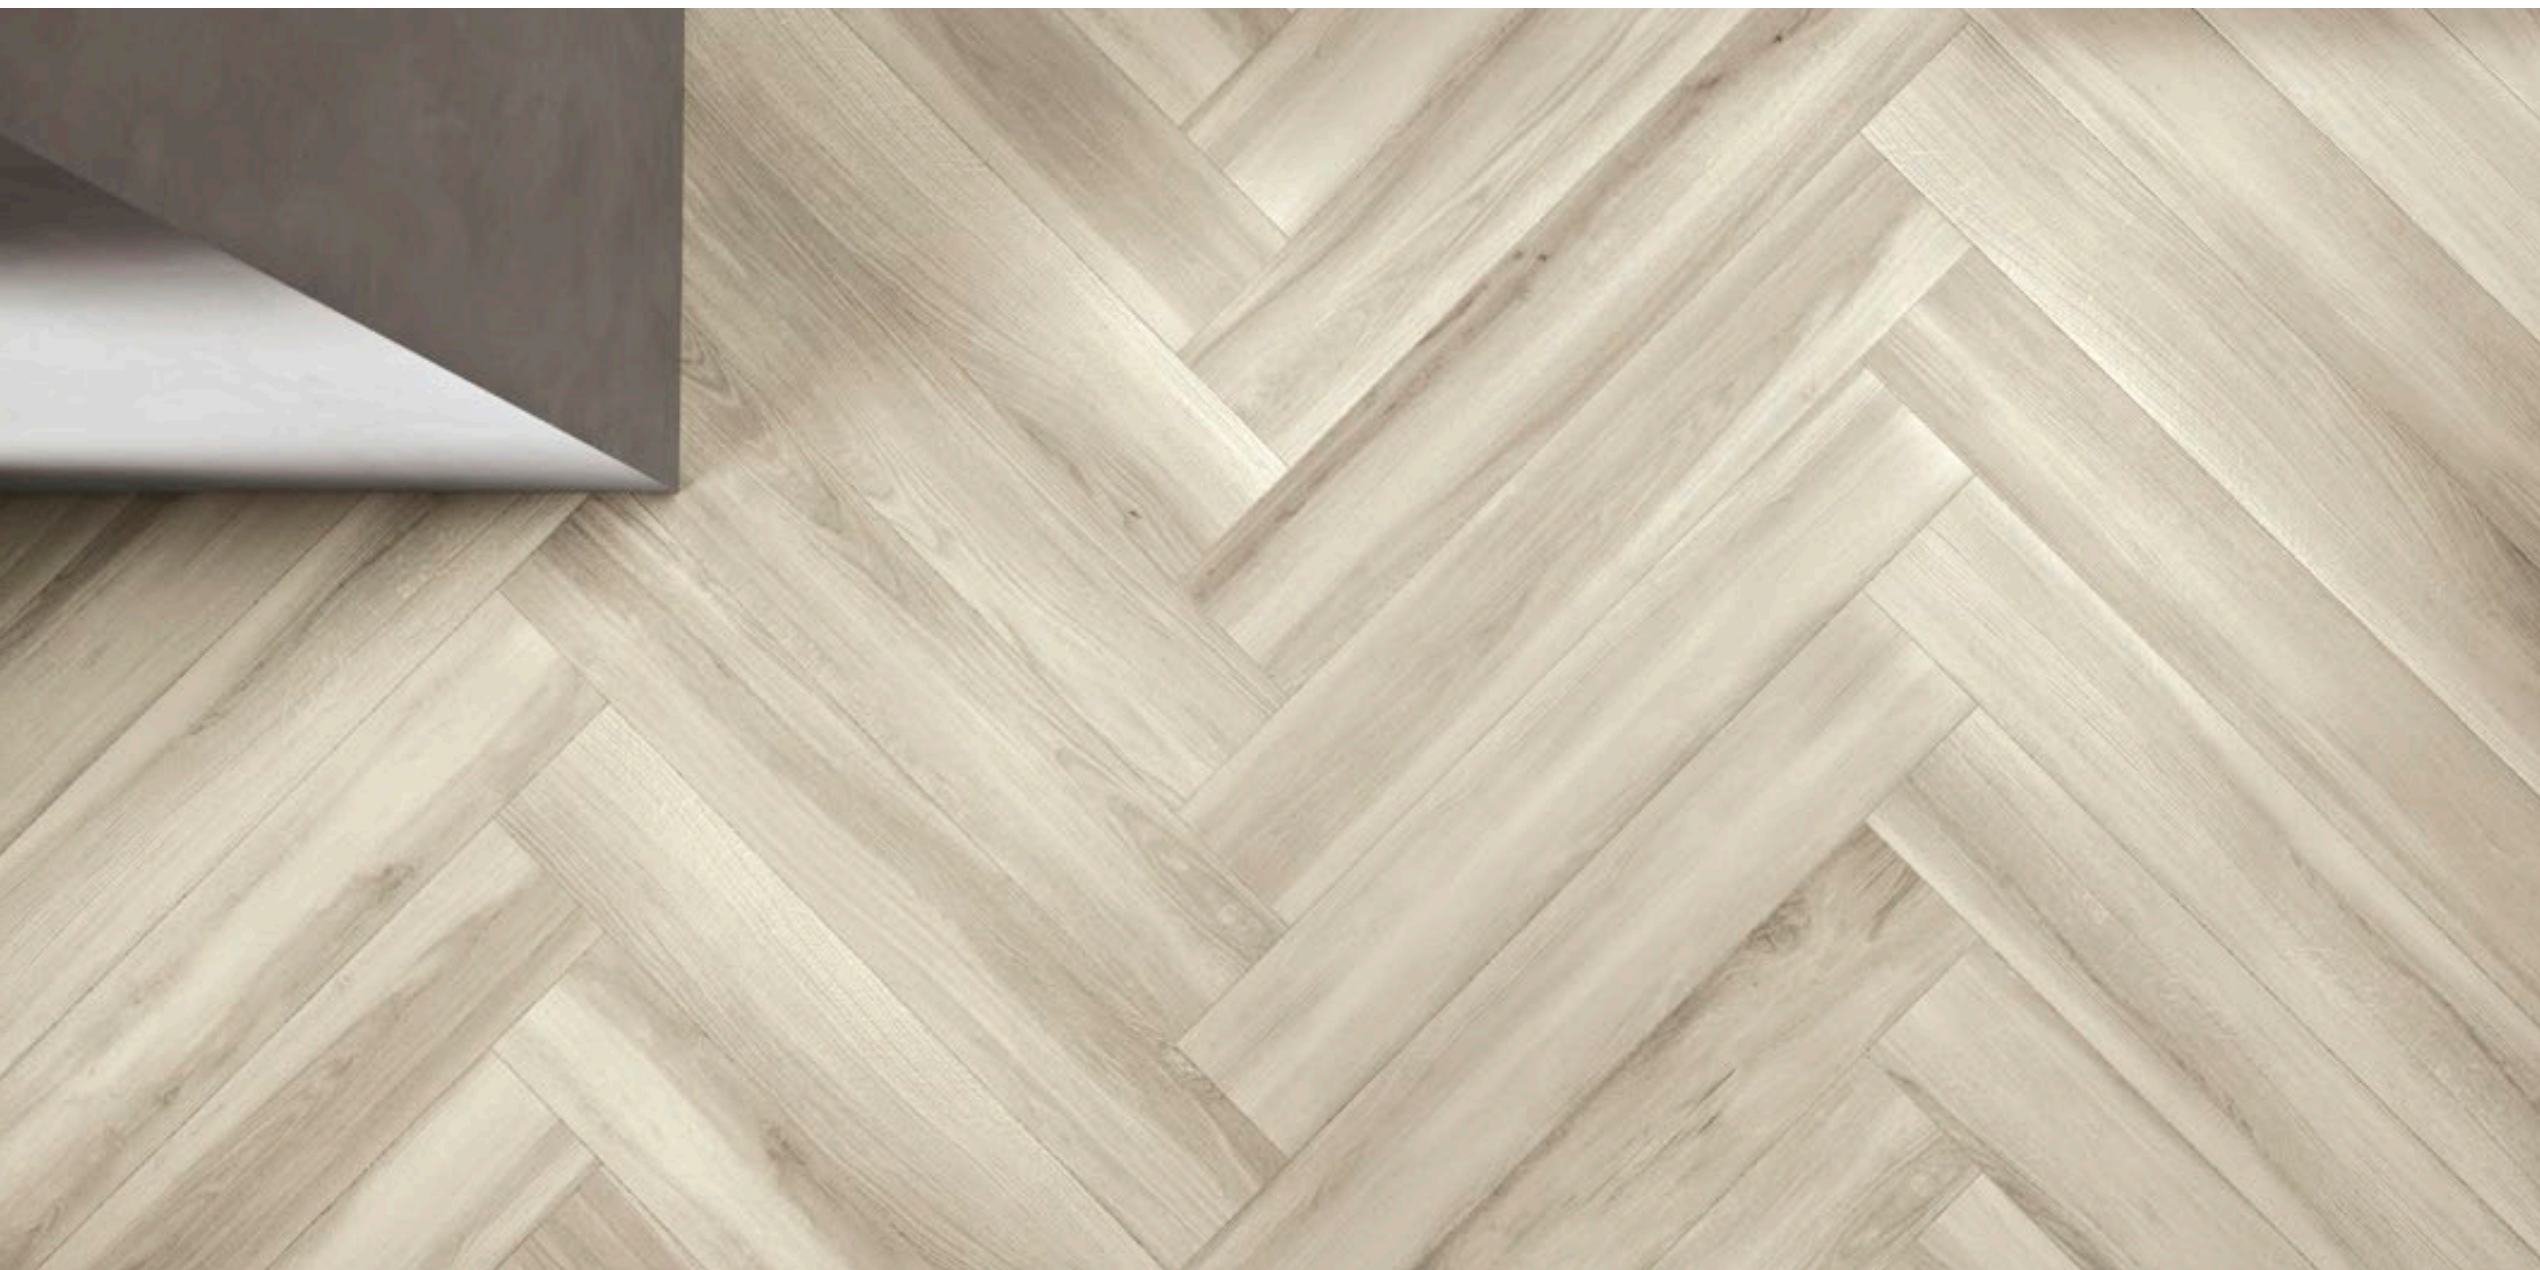

Wooden maple
20 x 119.5 - 8" x 48"





Wooden willow
30 x 119.5 - 12" x 48"



Wooden birch
20 x 119.5 - 8" x 48"



WOODEN BIRCH 20 X 119.5 - 8" X 48"



Wooden birch
20 x 119.5 - 8" x 48"






Wooden aspen
30 x 119.5 - 12" x 48"



WOODEN ASPEN 20 X 119.5 - 12" X 48"

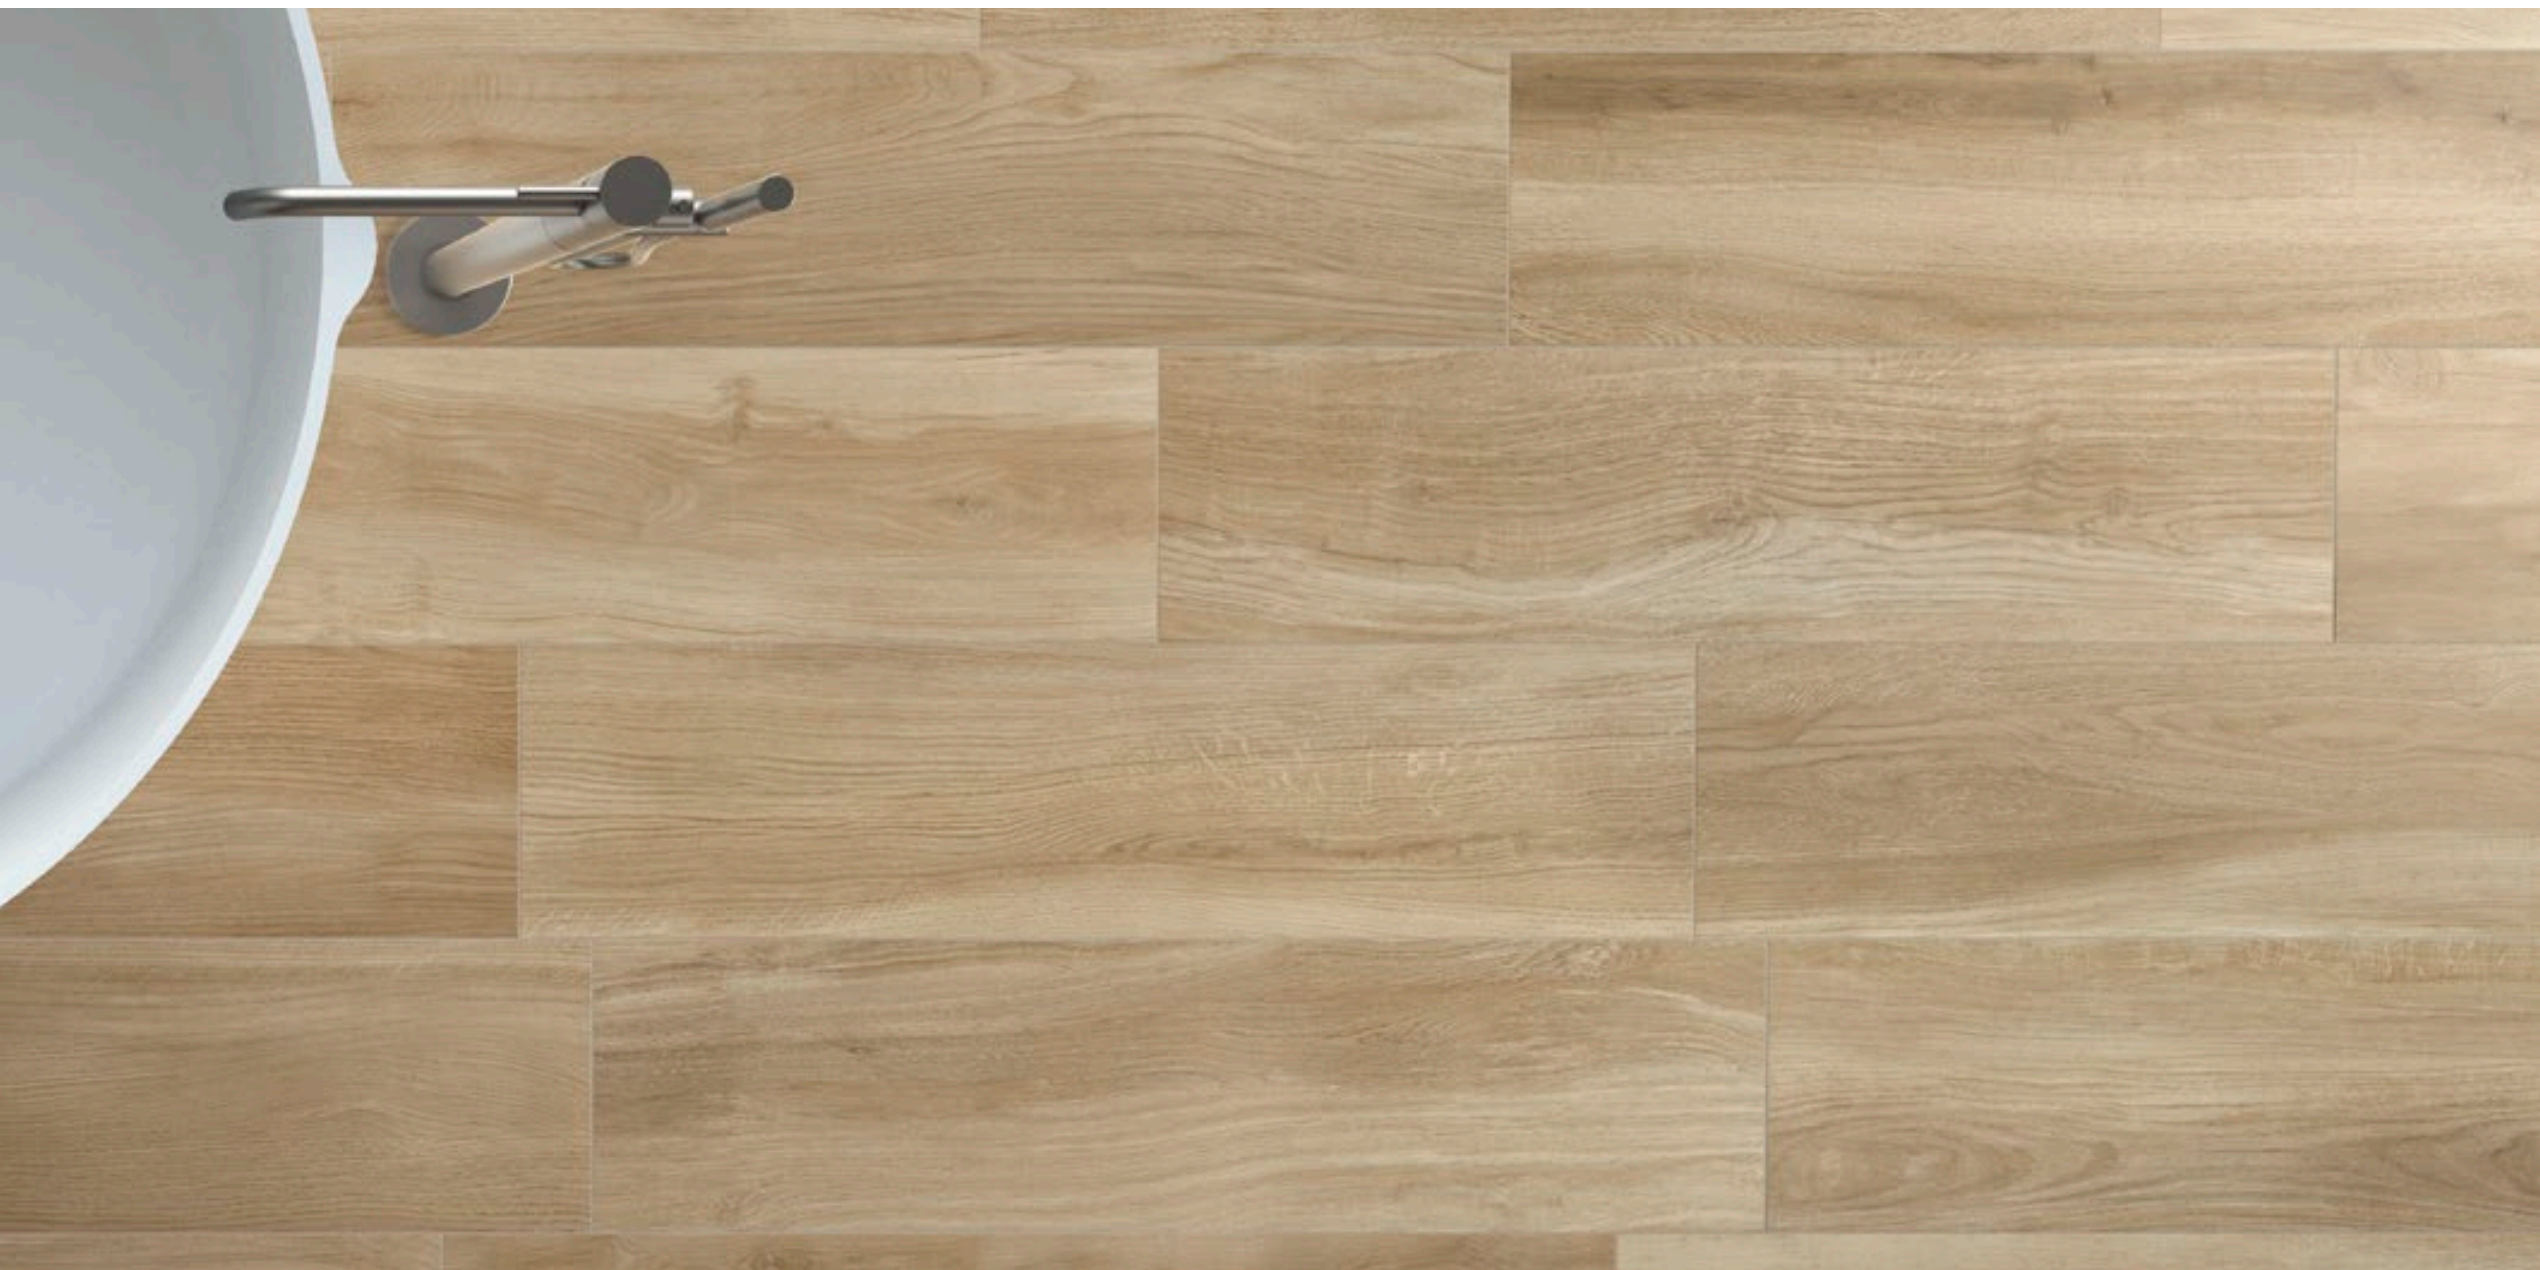


Wooden aspen
30 x 119.5 - 12" x 48"





○
WOODEN ELM 20 X 119.5 - 8" X 48"

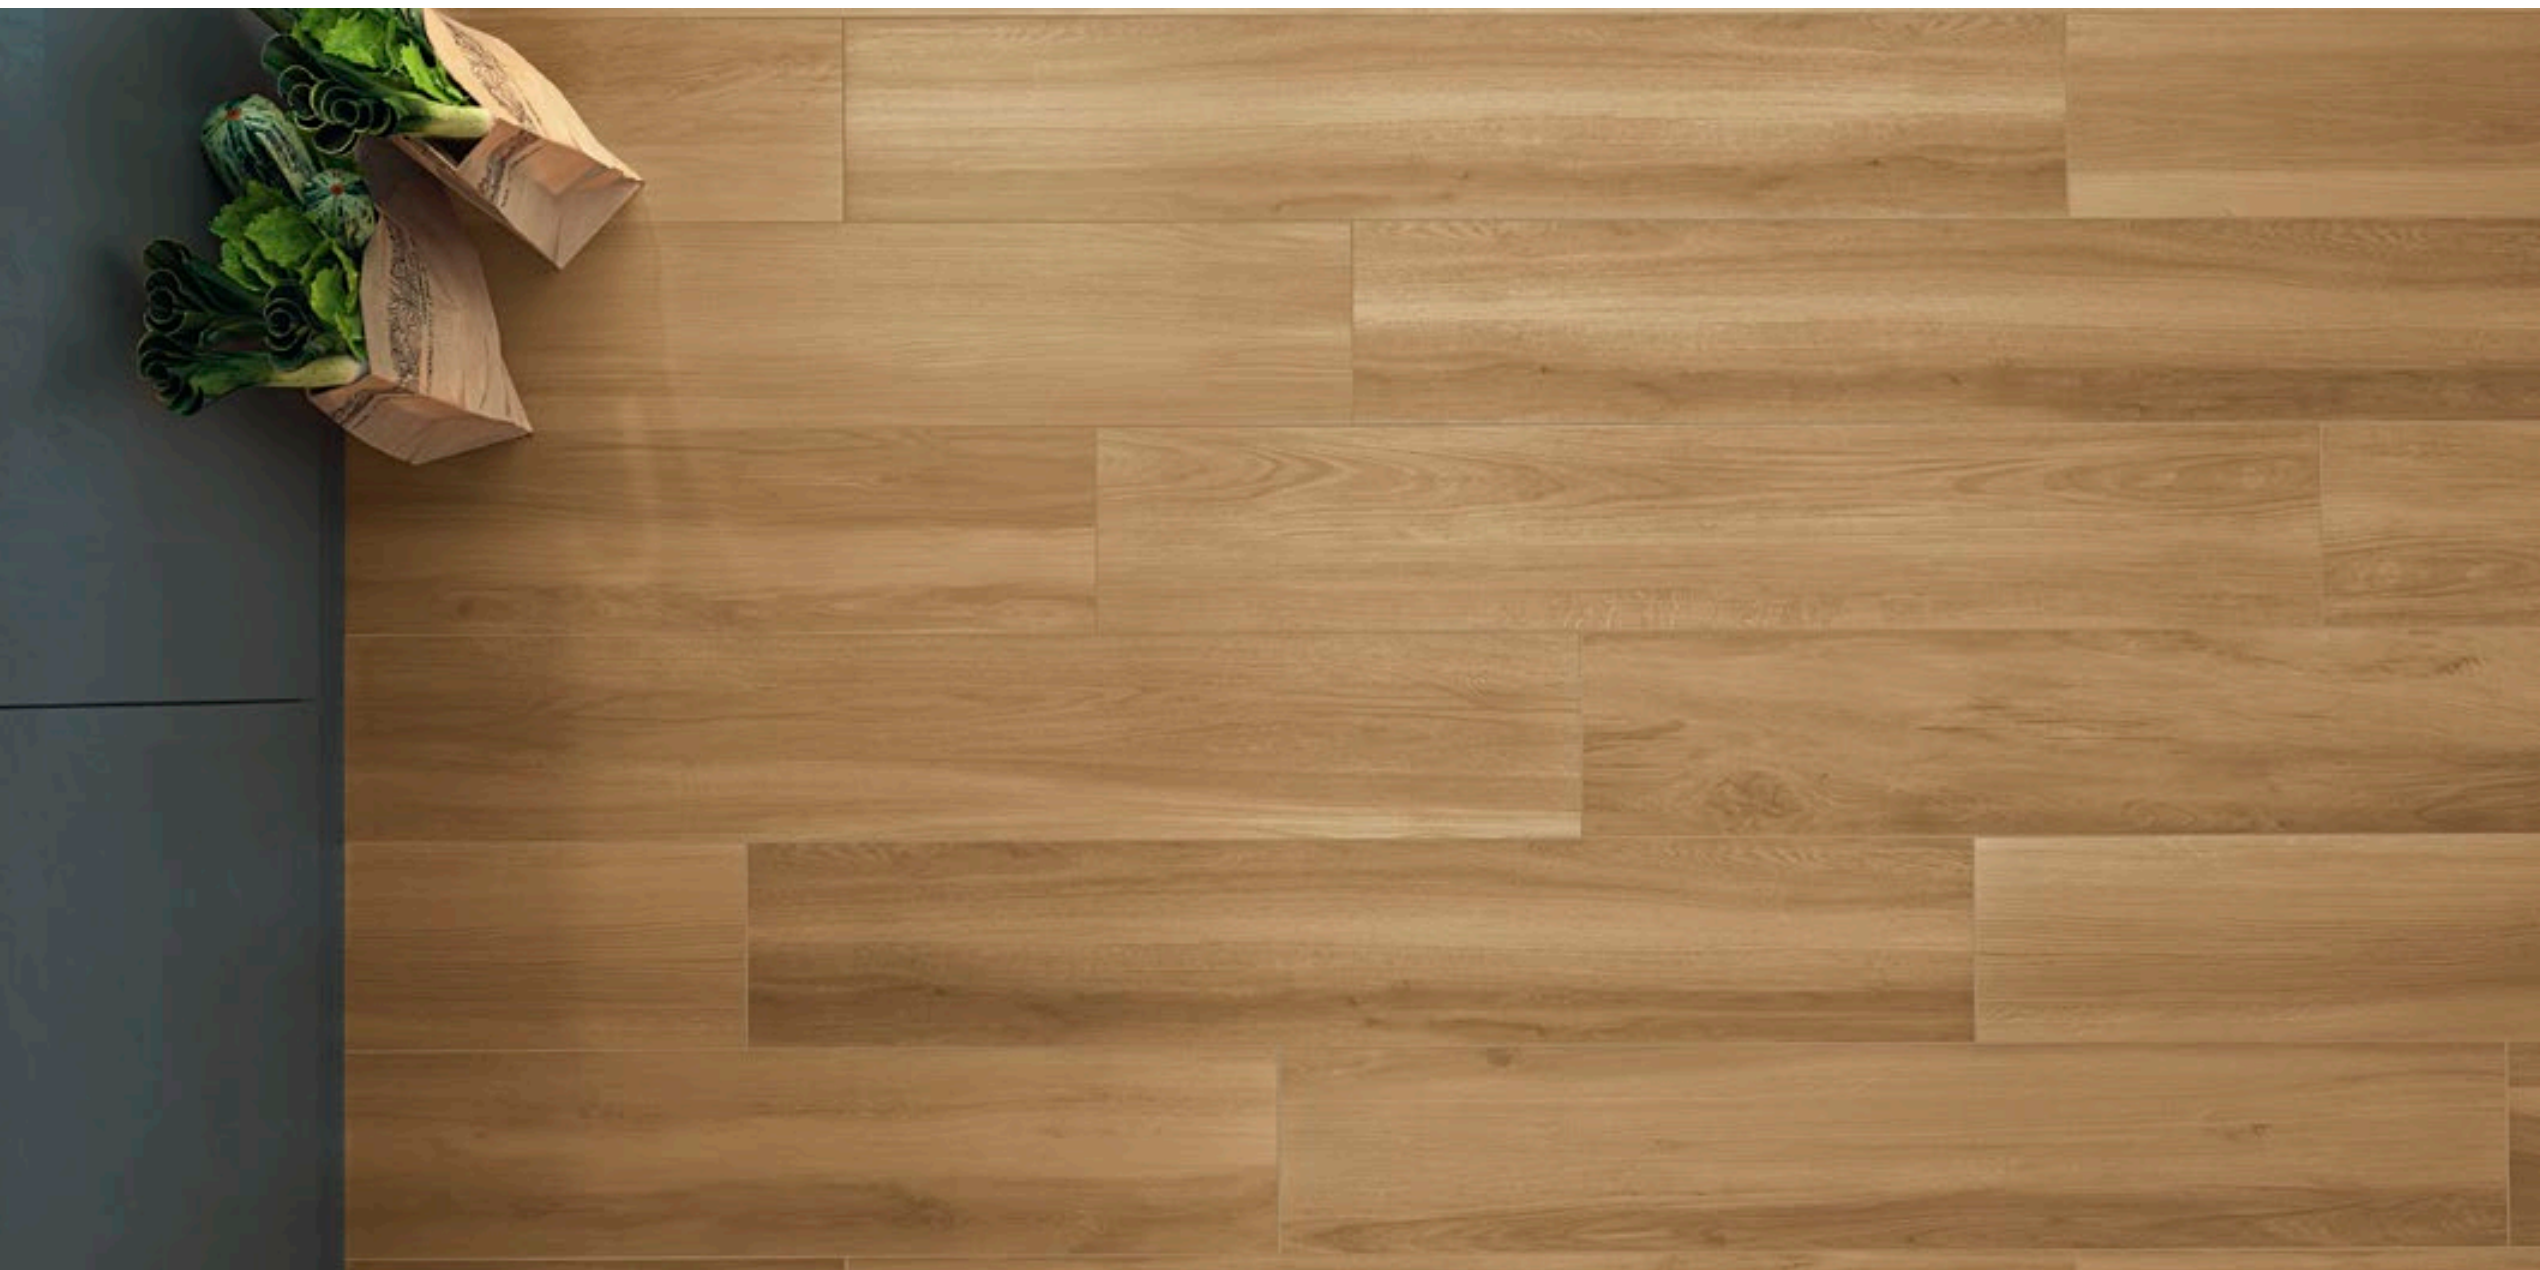

TECHNICAL DATA

Olive



Willow



Elm



Birch



Aspen



Maple





TECHNICAL INFORMATION & PLUS

SIZES




RETTIFICATO

$\frac{30 \times 119.5}{12'' \times 48''}$ **66**



RETTIFICATO I GRIP


$\frac{20 \times 119.5}{8'' \times 48''}$ **66** **69**



MOSAICO


$\frac{30 \times 30}{12'' \times 12''}$ **115**

SPECIAL ITEMS




GRADONE ANGOLARE
RETT. COSTA RETTA DX/SX

$\frac{30 \times 119.5 \times 4}{12'' \times 48'' \times 12/3''}$ **175**




GRADONE RETTIFICATO
COSTA RETTA

$\frac{30 \times 119.5 \times 4}{12'' \times 48'' \times 12/3''}$ **165**




BATTISCOPA SMALTATO
RETTIFICATO

$\frac{7 \times 60}{23/4'' \times 24''}$ **18**



ELEMENTO A L
RETTIFICATO

$\frac{20 \times 119.5 \times 5}{8'' \times 48'' \times 2''}$ **98**



ELEMENTO A L
GRIP RETTIFICATO

$\frac{20 \times 119.5 \times 5}{8'' \times 48'' \times 2''}$ **100**

GRADONE ANGOLARE RETT.
COSTA RETTA DX/SX GRIP

$\frac{20 \times 119.5 \times 4}{8'' \times 48'' \times 12/3''}$ **175**

GRADONE RETTIFICATO
COSTA RETTA GRIP

$\frac{20 \times 119.5 \times 4}{8'' \times 48'' \times 12/3''}$ **165**

TECHNICAL FEATURES

	standards	characteristics or properties	declared values
	ISO 10545-3	water absorption	<0.5%
	ISO 10545-4	breaking strength	35 N/mm ²
	ISO 10545-13	resistance to acid	GLA
	ISO 10545-7	resistance against abrasion (PEI)	V
	ISO 10545-12	frost resistance	resiste frost proof
	ISO 10545-14	stain resistance	5
	ISO 10545-2	surface flatness	±0.5%
		thickness	9.5 mm
	DIN51097 DIN51130 DCOF BOT 3000	static coefficient of friction	A+B R10 > 0.42
	DIN51097 DIN51130 DCOF BOT 3000	static coefficient of friction	A+B+C R11 > 0.42
		color shade variations	V3 moderate variation

for all informations concerning special pcs, laying solutions and technical features please refers to the 2thick catalogue

PACKING

mm	inch		thickness	pcs/box	sqm/box	kgs/box	box/pal	sqm/pal	kgs/pal
30x119.5	12"x48"	rettificato	9.5	4	1.43	30.36	36	51.62	1092.96
20x119.5	8"x48"	rettificato grip	9.5	5	1.19	25.10	36	43.02	903.60
30x30	12"x12"	mosaico		11	1.00	19.33	36	36.00	659.88
30x119.5x4	12"x48"x12/3"	gradone costa retta rettificato		2		19.50			
30x119.5x4	12"x48"x12/3"	gradone angolare costa retta		1		10.25			
20x119.5x4	8"x48"x12/3"	gradone costa retta grip rettificato		2		14.48			
20x119.5x4	8"x48"x12/3"	gradone angolare costa retta grip rettificato		1		7.58			
20x60x5	8"x24"x2"	elemento a L rettificato grip		4		13.12			
20x119.5x5	8"x48"x2"	elemento a L rettificato grip		2		13.10			
7x60	23/4"x24"	battiscopa smaltato rettificato		12		11.76			

the indicated weight includes the supporting pallet

JOINT

for rectified material, we recommend a 2 mm grout at least when using one size only and a 3 mm grout for multisizes laying solution



The content of this catalogue is only indicative and not exhaustive in respect of graphics, decorations and colours.



think
outside
the box

