

WOOD side



The image shows a close-up of a rectangular tile with a light beige, wood-grain-like texture. The tile is part of a larger wall or floor installation, with the grout lines visible. The text 'WOOD side_1' is overlaid on the right side of the image.

WOOD side_1

RECTIFIED GLAZED PORCELAIN TILE

The divisions between the spaces wear thin. The outside merges with the inside and vice versa. **WOOD SIDE** fits the spaces beyond the boundaries from the outdoor to the indoor, presenting the features of natural wood and the technical characteristics of porcelain stoneware, which creates a resistant, versatile, innovative and fascinating product.



WOOD side

RECTIFIED GLAZED PORCELAIN TILE



80x180

26,5x180

60x120

20x120

15x90



120x240

30x240

80x180

26,5x180

20x120

40x120 doga

60x60 doga

OAK

NUT

MAPLE

KAURI

Four colours to represents what nature creates.
A wide range of sizes to reproduce the
continuity of wood planks suitable for indoor
and outdoor.



WOOD side

THE GREEN SIDE OF THE **WOOD**

OAK

floor OAK grip R11 20x120
wall OAK CHALET 29x120



floor
OAK 26,5x180 - 20x120



floor
OAK 26,5x180 - 20x120







steps

OAK

disegno tecnico a pag.54



WOOD side

THE GREEN SIDE OF THE **WOOD**

NUT



floor
BLAUTECH GRIJS NAT. 80x80
wall
NUT 26,5x180
banco bar
NUT
(realizzato come pezzo speciale)



floor
NUT 20x120
wall
NUT 20x120
NUT STRIP 1,5x60 - 10x60







floor

NUT 26,5x180 - 20x120

outdoor

NUT grip R11 20x120

wall

TALCO 30x120 - 60x120

NUT STICKS 2,8x30 - 30x30

NUT STRIP 1,5x60 - 10x60



WOOD side

THE GREEN SIDE OF THE **WOOD**

MAPLE

floor

ROCKS ALTA 60x60

wall

ROCKS ALTA 30x60

MAPLE LISTELLATO 25x120

top lavabo

MAPLE

(realizzato come pezzo speciale)





floor
ROCKS ALTA 60x60
wall
MAPLE LISTELLATO 25x120

floor
MAPLE DOGA 60x60





floor
MAPLE grip R11 20x120



WOOD side

THE GREEN SIDE OF THE **WOOD**

KAURI



floor
KAURI 26,5x180 - 20x120 - 15x90





floor

KAURI 20x120 - 15x90
ROCKS ALTA 30x60 - 60x60


wall

KAURI CHALET 29x120



WOOD side

RECTIFIED GLAZED PORCELAIN TILE

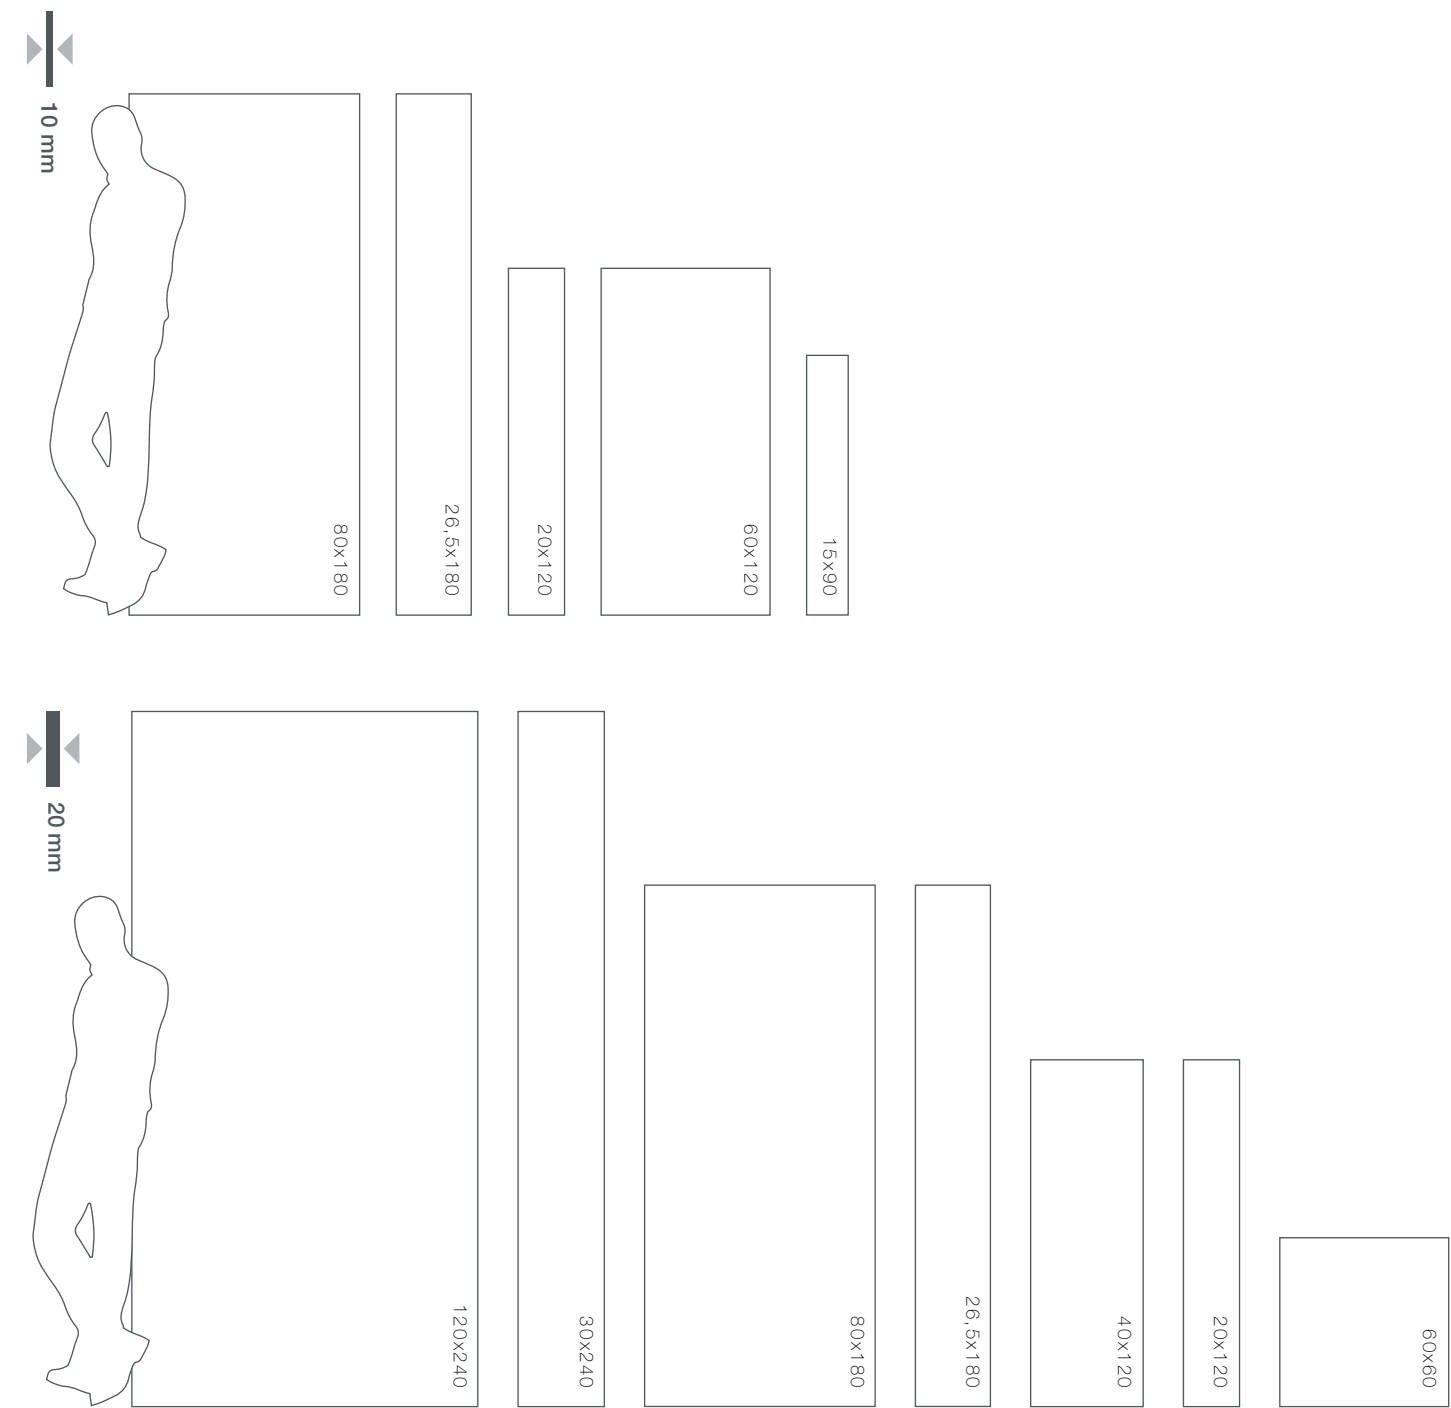

SPECIAL PIECES

Big range of special pieces available on demand.



120x240 OAK 2.0
A6695 rett.



30x240 OAK 2.0
6691 rett.



80x180 OAK 2.0
8046 rett.



26,5x180 OAK 2.0
8054 rett.



20x120 OAK 2.0
6681 rett.



40x120 OAK DOGA 2.0
6651 rett.



60x60 OAK DOGA 2.0
6546 rett.

SPECIAL PIECES




80x180 OAK
6501 rett.



26,5x180 OAK
6506 rett.



20x120 OAK
6511 rett.
6591 grip rett. R11



60x120 OAK
6576 rett.
6601 grip rett. R11



15x90 OAK
6516 rett.

7,5x60 BATT. OAK
6571



30x30 tessere 3x3
MOS. OAK
6551



30x30 tessere 2,8x30
MOS. STICKS OAK
6606



30x30 tessere 1,5x10
MOS. WOOD LIGHT
6616



30x30 tessere 1,5x10
MOS. WOOD MEDIUM
6617



10x60 strisce 1,5x60
MOS. STRIP OAK
6611



29x120 OAK CHALET
6556



25x120 OAK LISTELLATO
6561



NUT 26,5x180



V3
moderate variation



20 mm **SKE2.0**



120x240 NUT 2.0
A6697 rett.



30x240 NUT 2.0
6693 rett.



80x180 NUT 2.0
8047 rett.



26,5x180 NUT 2.0
8055 rett.



20x120 NUT 2.0
6683 rett.



40x120 NUT DOGA 2.0
6653 rett.



60x60 NUT DOGA 2.0
6548 rett.

SPECIAL PIECES

Big range of special pieces available on demand.

10 mm



80x180 NUT
6503 rett.



26,5x180 NUT
6508 rett.



20x120 NUT
6513 rett.
6593 grip rett. **R11**



60x120 NUT
6578 rett.
6603 grip rett. **R11**



15x90 NUT
6518 rett.



7,5x60 BATT. NUT
6573

SPECIAL PIECES



30x30 tessere 3x3
MOS. NUT
6553



30x30 tessere 2,8x30
MOS. STICKS NUT
6608



30x30 tessere 1,5x10
MOS. WOOD DARK
6615



30x30 tessere 1,5x10
MOS. WOOD MEDIUM
6617



10x60 strisce 1,5x60
MOS. STRIP NUT
6613



29x120 NUT CHALET
6558



25x120 NUT LISTELLATO
6563





120x240 MAPLE 2.0
A6694 rett.



30x240 MAPLE 2.0
6690 rett.



20x120 MAPLE 2.0
6680 rett.



40x120 MAPLE DOGA 2.0
6650 rett.



60x60 MAPLE DOGA 2.0
6545 rett.

SPECIAL PIECES

Big range of special pieces available on demand.



80x180 MAPLE
6500 rett.



26,5x180 MAPLE
6505 rett.



20x120 MAPLE
6510 rett.
6590 grip rett. R11



60x120 MAPLE
6575 rett.
6600 grip rett. R11



15x90 MAPLE
6515 rett.

SPECIAL PIECES



7,5x60 BATT. MAPLE
6570



30x30 tessere 3x3
MOS. MAPLE
6550




30x30 tessere 2,8x30
MOS. STICKS MAPLE
6605



30x30 tessere 1,5x10
MOS. WOOD LIGHT
6616



10x60 strisce 1,5x60
MOS. STRIP MAPLE
6610

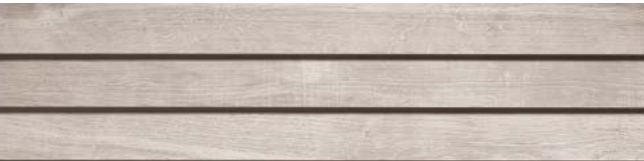

29x120 MAPLE CHALET
6555



25x120 MAPLE LISTELLATO
6560




KAURI 26,5x180



20 mm **SKE2.0**



20x120 KAURI 2.0
6682 rett.



40x120 KAURI DOGA 2.0
6652 rett.



60x60 KAURI DOGA 2.0
6547 rett.

SPECIAL PIECES

Big range of special pieces available on demand.

10 mm



80x180 KAURI
6502 rett.



26,5x180 KAURI
6507 rett.



20x120 KAURI
6512 rett.
6592 grip rett. **R11**



60x120 KAURI
6577 rett.
6602 grip rett. **R11**



15x90 KAURI
6517 rett.



7,5x60 BATT. KAURI
6572

SPECIAL PIECES



30x30 tessere 3x3
MOS. KAURI
6552



30x30 tessere 2,8x30
MOS. STICKS KAURI
6607



30x30 tessere 1,5x10
MOS. WOOD DARK
6615



10x60 strisce 1,5x60
MOS. STRIP KAURI
6612




29x120 KAURI CHALET
6557











25x120 KAURI LISTELLATO
6562



STEPS_

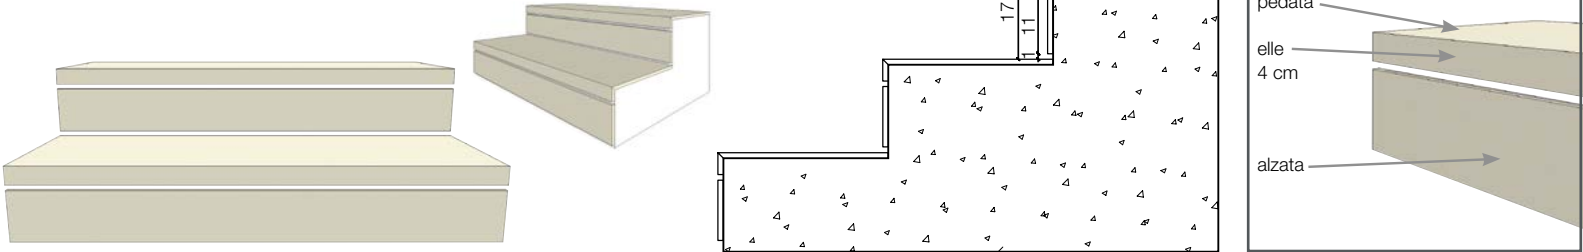

INSTALLATION PATTERNS

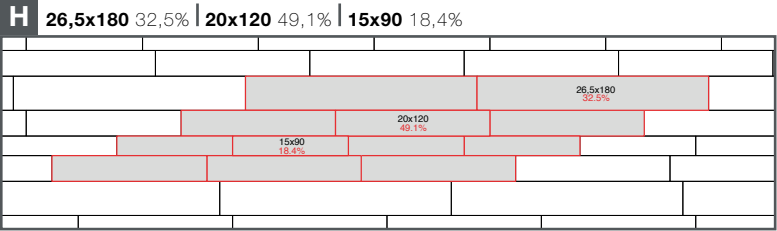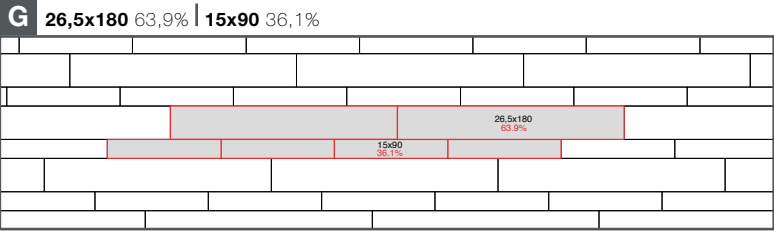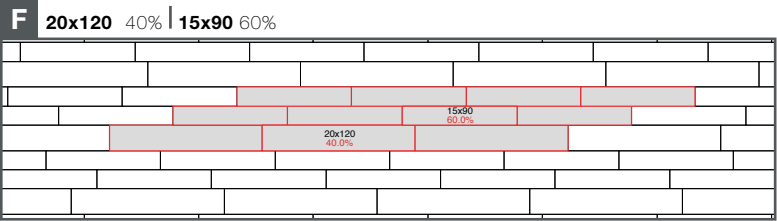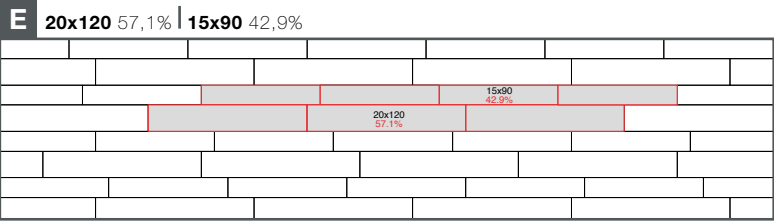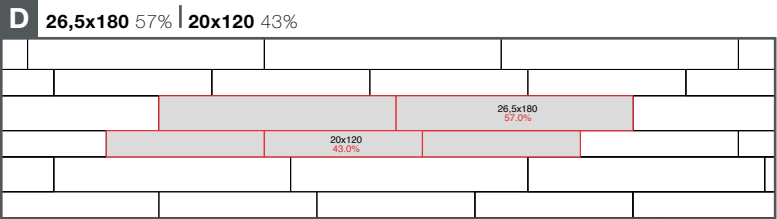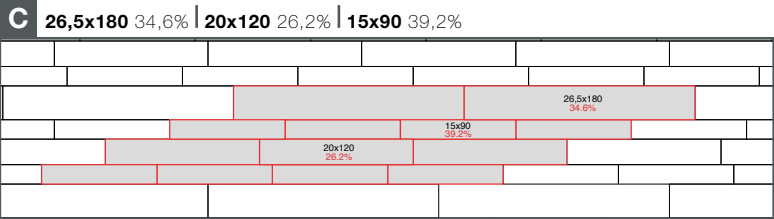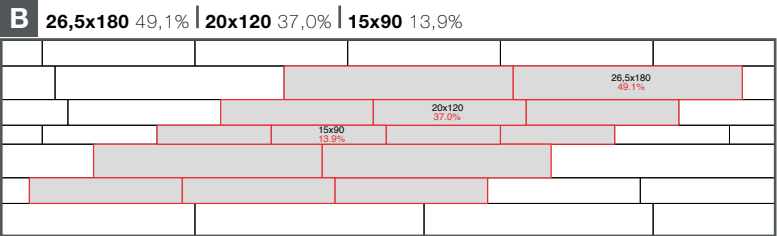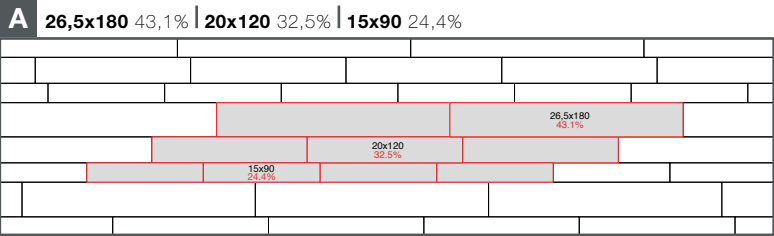

WOODSIDE	Thickness	Pezzi per scatola	M² per scatola	Kg per scatola	Scatole per pallet	M² per pallet	KG per pallet
80x180	10	2	2,88	67,00	20	57,60	1.360
26,5x180	10	3	1,44	32,80	42	60,48	1.397,6
60x120	10	2	1,44	33,00	30	43,20	1.010
20x120	10	6	1,44	31,00	24	34,56	764
15x90	10	6	0,81	20,50	72	58,32	1.496
29x120 chalet	10	2	0,70	16,00	20	14,00	340
25x120 listellato	10	2	0,60	14,00	20	12,00	300
30x30 - mosaico 3x3	10	10	0,90	18,00	30	27,00	560
30x30 - sticks 2,8x30	10	10	0,90	18,00	30	27,00	560
30x30 - mosaico mix 1,5x10	10	5	0,45	7,50	-	-	-
10x60 - strip 1,5x60	10	5	0,30	7,00	-	-	-
120x240	20	1	2,88	136,00	6	17,28	836
30x240	20	1	0,72	33,00	20	14,40	680
80x180	20	1	1,44	67,00	20	28,80	1.360
26,5x180	20	2	0,96	44	30	28,80	1.340
20x120	20	3	0,72	31,50	24	17,28	776
60x60	20	2	0,72	33,00	30	21,60	1.010
40x120	20	2	0,96	44,20	24	23,04	1.080,8

CHARACTERISTICS OR PROPERTIES	STANDARS	COMPLIANCE WITH STANDARDS				
SURFACE QUALITY	ISO 10545-2	AT LEAST 95% OF THE TILES MUST BE FREE FROM VISIBLE FLAWS			COMPLIES WITH STANDARD	
		N ≥ 15cm %	N ≥ 15cm mm	TEST RESULTS	COMPLIES WITH STANDARD	
		± 0,5 %	± 1,5 mm	± 0,10%	COMPLIES WITH STANDARD	
		± 0,5 %	± 0,5 mm	± 5%	COMPLIES WITH STANDARD	
		± 0,5 %	± 2,0 mm	± 0,20%	COMPLIES WITH STANDARD	
		± 0,5 %	± 2,0 mm	± 0,35%	COMPLIES WITH STANDARD	
MAXIMUM STRAIGHTNESS DEVIATION IN %						
ADMITTED DEVIATION, IN %, OF THE AVERAGE THICKNESS OF EACH TILE FROM THE PRODUCTION DIMENSIONS					COMPLIES WITH STANDARD	
MAXIMUM RIGHT-ANGLE DEVIATION IN %					COMPLIES WITH STANDARD	
FLATNESS					COMPLIES WITH STANDARD	
LENGTH AND WIDTH					COMPLIES WITH STANDARD	
WATER ABSORPTION	ISO 10545-3	≤ 0,5 %			E <= 0,04 %	
BENDING STRENGTH	ISO 10545-4	R ≥ 35 N/mm²			53 N/mm²	
IMPACT RESISTANCE	ISO 10545-5	DECLARED VALUE			0,88	
RESISTANCE TO DEEP ABRASION	ISO 10545-6	≤175 mm³			<128 mm³	
COEFFICIENT OF LINEAR THERMAL-EXPANSION	ISO 10545-8	-			α=7x10 ⁻⁶ /°C ⁻¹	
THERMAL SHOCK RESISTANCE	ISO 10545-9	PASS ACCORDING EN ISO 10545-1			NO DAMAGE	
FROST RESISTANCE	ISO 10545-12	PASS ACCORDING EN ISO 10545-1			NO DAMAGE	
CHEMICAL RESISTANCE	ISO 10545-13	UB MIN.			UA ULA UHA	
RESISTANCE TO STAIN	ISO 10545-14	DECLARED VALUE			Classe 5	
FIRE RESISTANCE	EN 13501 - 1	DECLARED VALUE			CLASSE A1 - A1 FL	
IP RESISTANCE				NAT	GRIP	SKE2.0
	B.C.R. C.A. B.C.R. G.B D. M. 236 DEL 4.6 1989	> 0,40		CONF	CONF	CONF
	ASTM C 1028/07 BOT 3000	Dry SCOF > 0,60		CONF	CONF	CONF
	ASTM C 1028/07 BOT 3000	Wet SCOF > 0,60		CONF	CONF	CONF
	ANSI A137.1 BOT 3000	Wet DCOF > 0,42		CONF	CONF	CONF
	DIN 51130	-		R10	R11	R11
	DIN 51097	-		A	A+B+C	A+B+C
	ENV 12633	≥ CL 1		CONF	CONF	CONF
	UNI EN 13036 - 4 2011	≥ 36		CONF	CONF	CONF
COLOUR STABILITY ON EXPOSURE TO LIGHT AND UV RAYS	DIN 51094	DECLARED VALUE -			COMPLIES WITH STANDARD, NO VARIATION	
SKE2.0						
STATIC LOAD	EN 12825	DECLARED VALUE			CENTRE POINT OF SIDES 6,5 KN	
DYMANIC LAOD CAPACITY, HAND OBJECT IMPACT	EN 12825	DECLARED VALUE			TEST NOT PASSED	
DYMANIC LAOD CAPACITY, SOFT OBJECT IMPACT	EN 12825	DECLARED VALUE			TEST PASSED	
BENDIND STRENGTH	EN 1339	Kn 14,38			CLASSE U14	
BREAKING FORCE IN MPA		-			MPA 46,5	