




PARNON LIGHT

THORNTREE

natural stone • fine porcelain

MARBLE

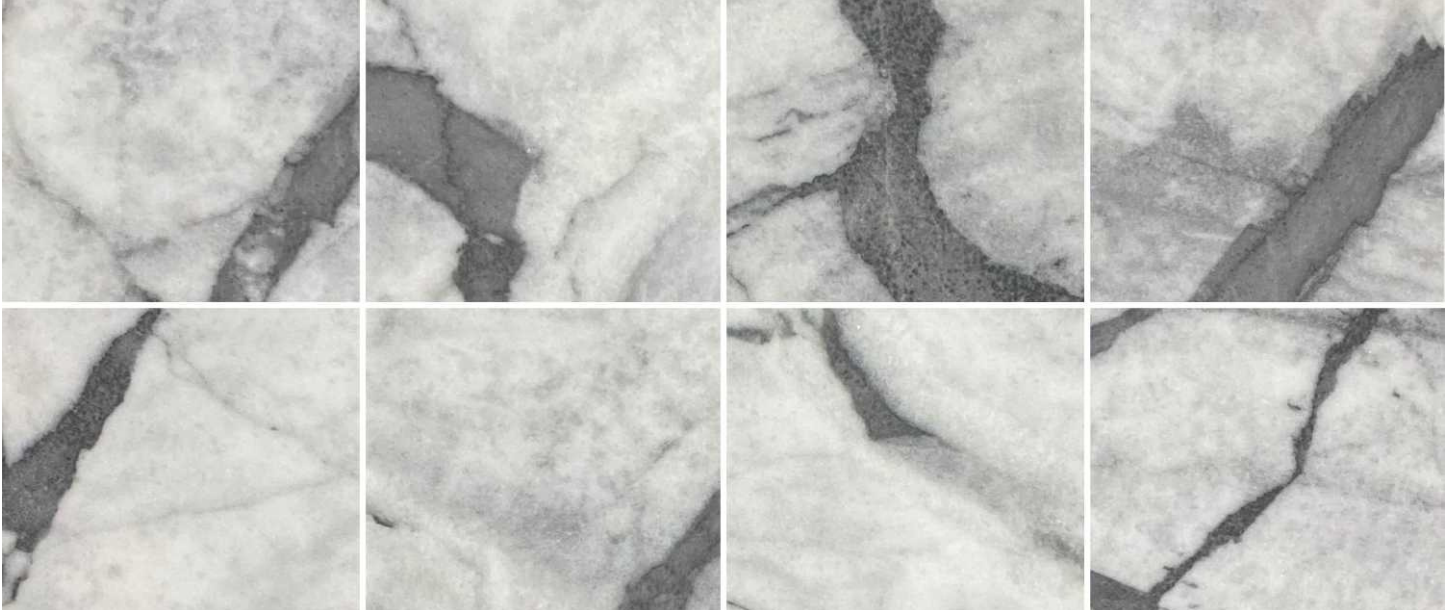

TESTING DATA

Water Absorption: 0.2%
Flexural Strength: 12.6 MPa
Frost Resistance: Class F1
Apparent Density: 2710 kg/m³

APPLICATION

Coping: Yes
Countertop: Yes
Exterior Cladding: Yes
Exterior Countertop: Yes
Exterior Tile: Yes

Exterior Paver: Yes
Floor: Yes
Shower/ Wet Areas: Yes
Wall: Yes

PACKING DETAILS

Per Order

INFORMATION

Parnon Light is available in custom sizes, thicknesses, finishes and formats. Please contact info@thorntreeslate.com for additional information.