PLASTER 2.0

RESPONSIBLE DESIGN • SUSTAINABLE BEAUTY





In response to the urgency of the climate crisis, Plaster 2.0 presents a necessary revolution within the industry. Plaster 2.0 is MILE®stone's first entirely carbon neutral product.

It is a beautiful concrete design paired with six bold hues that replicate the artistic layering of venetian plaster. This collection is available in various sizes, along with coordinating trim pieces that offers you conscious versatility.

It's time to take responsibility with the sustainable beauty of Plaster 2.0.



PLASTER 2.0



Wall Venetian Crystal White 6"x24" Venetian Clover 6"x24"

2 colors







IVORY







Carbon Neutral

1102930 - 12"x24" Rectified 1102912 - 16"x32" Rectified 1102949 - 32"x32" Rectified 1102955 - 2"x2" Mosaic 1102961 - 3"x12" Bullnose 1102967 - 6"x12" Cove Base

SILVER GREY







Carbon Neutral

1102931 - 12"x24" Rectified 1102913 - 16"x32" Rectified 1102950 - 32"x32" Rectified 1102956 - 2"x2" Mosaic 1102962 - 3"x12" Bullnose 1102968 - 6"x12" Cove Base

SAND









Carbon Neutral

1102932 - 12"x24" Rectified 1102914 - 16"x32" Rectified 1102951 - 32"x32" Rectified 1102957 - 2"x2" Mosaic 1102963 - 3"x12" Bullnose 1102969 - 6"x12" Cove Base


TORTORA

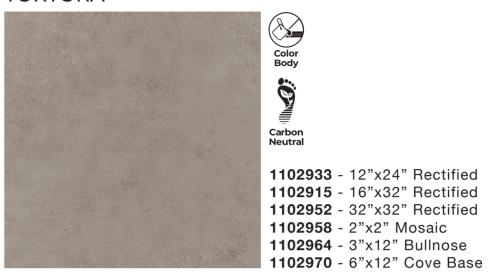

ESPRESSO

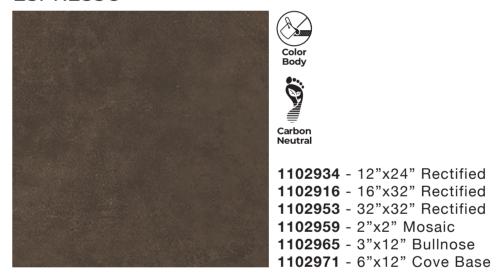

MIDNIGHT

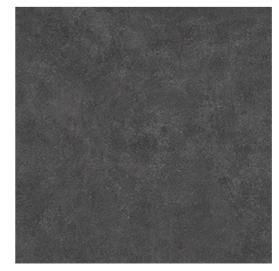





Carbon Neutral

1102935 - 12"x24" Rectified 1102917 - 16"x32" Rectified 1102954 - 32"x32" Rectified 1102960 - 2"x2" Mosaic 1102966 - 3"x12" Bullnose 1102972 - 6"x12" Cove Base 7



VENETIAN CRYSTAL WHITE





VENETIAN GOLD



VENETIAN CLAY







11

VENETIAN BAY




VENETIAN CLOVER



12

YOUR SPACE REDEFINED

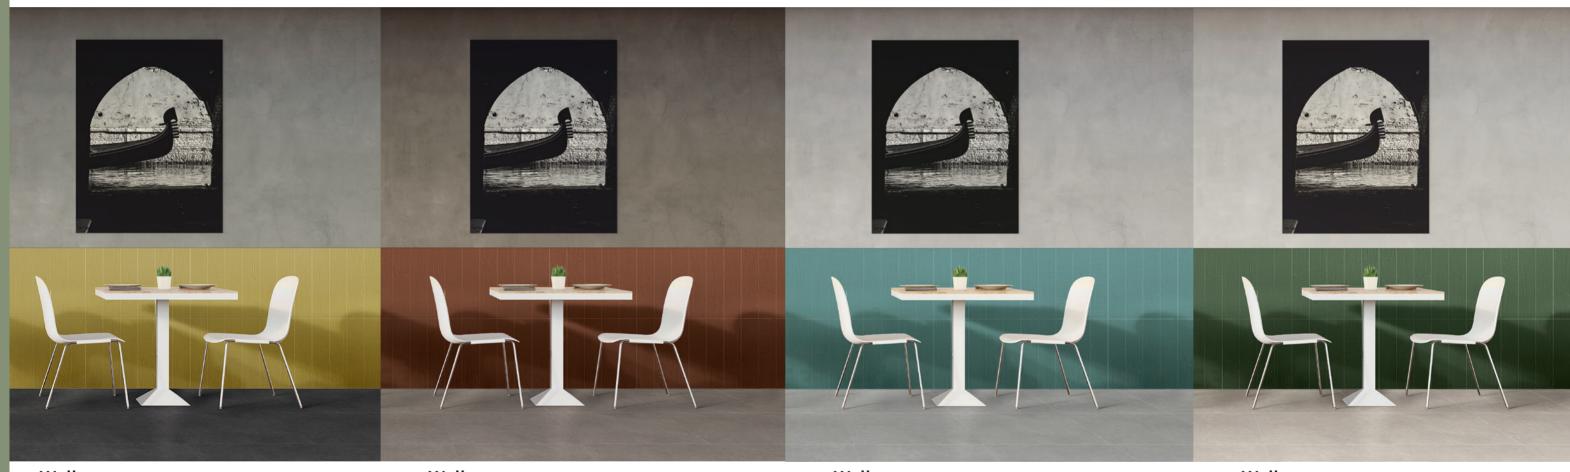

Wall Venetian Gold 6"x24"


Floor Midnight 32"x32" Wall Venetian Red 6"x24"

Floor Tortora 32"x32" Wall Venetian Bay 6"x24"

Floor Silvergrey 32"x32" Wall Venetian Clover 6"x24"


Floor Ivory 32"x32"



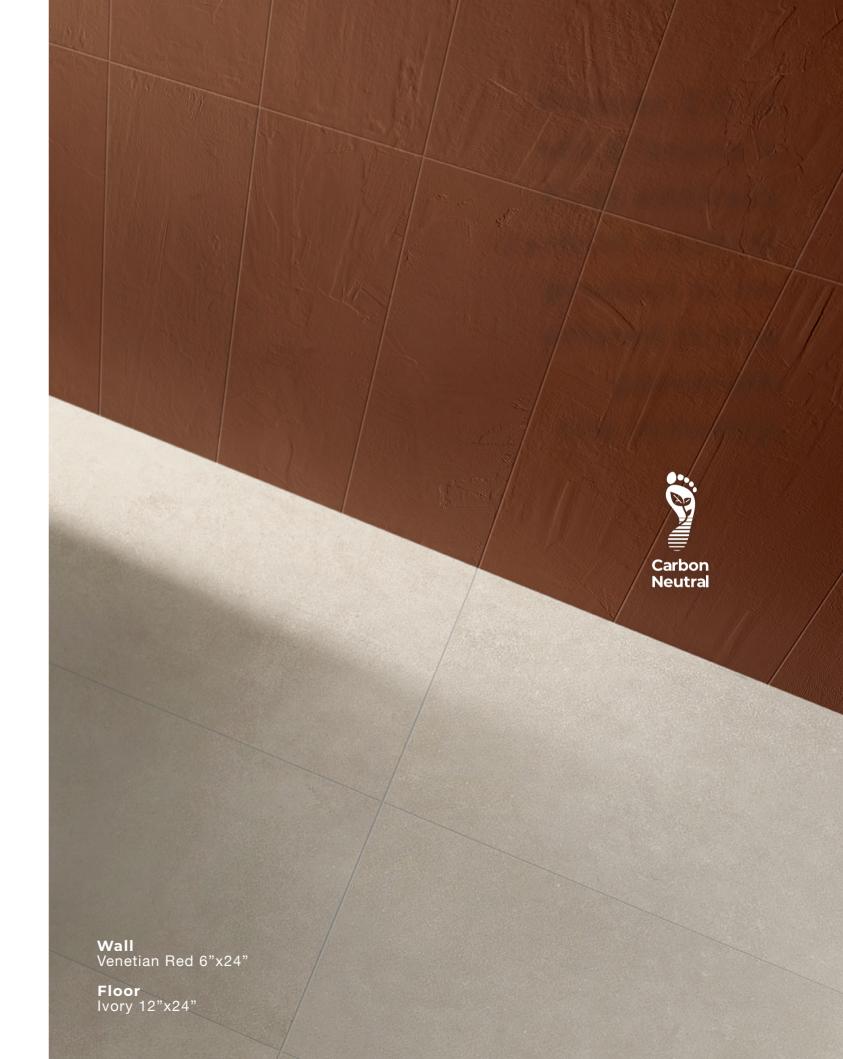





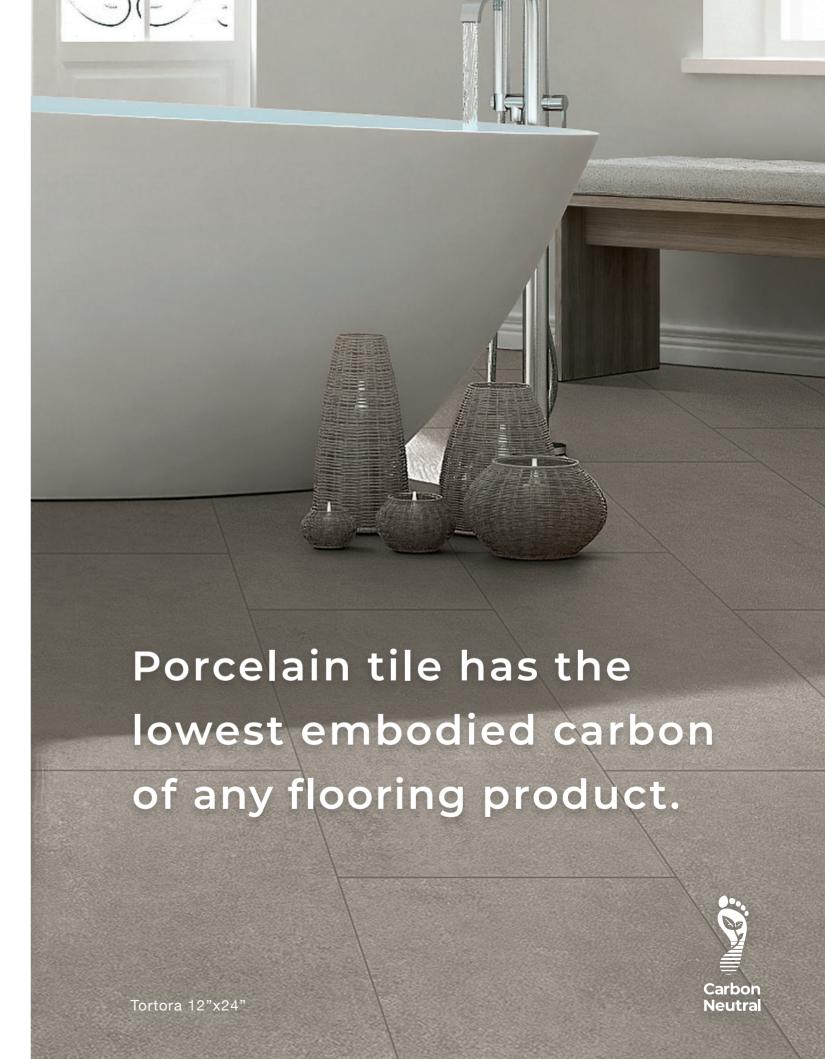











Wall Venetian Bay 6"x24"

Floor Ivory 32"x32"

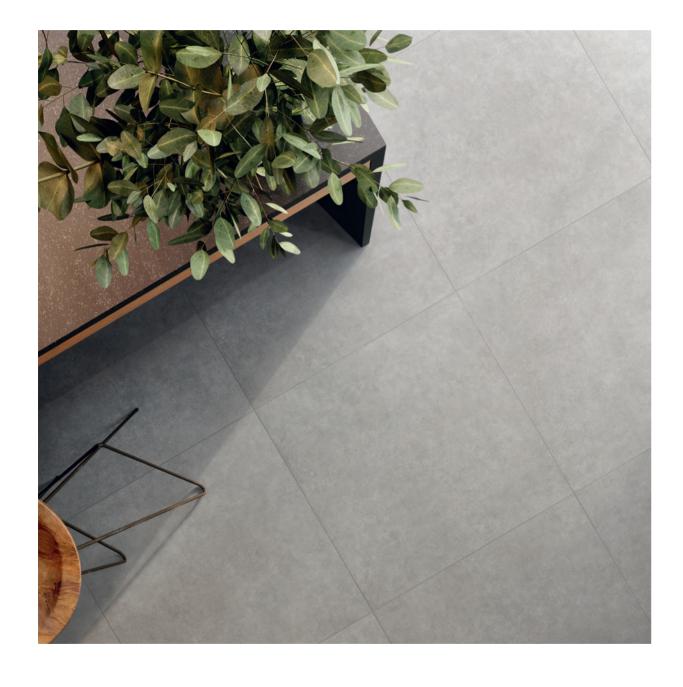

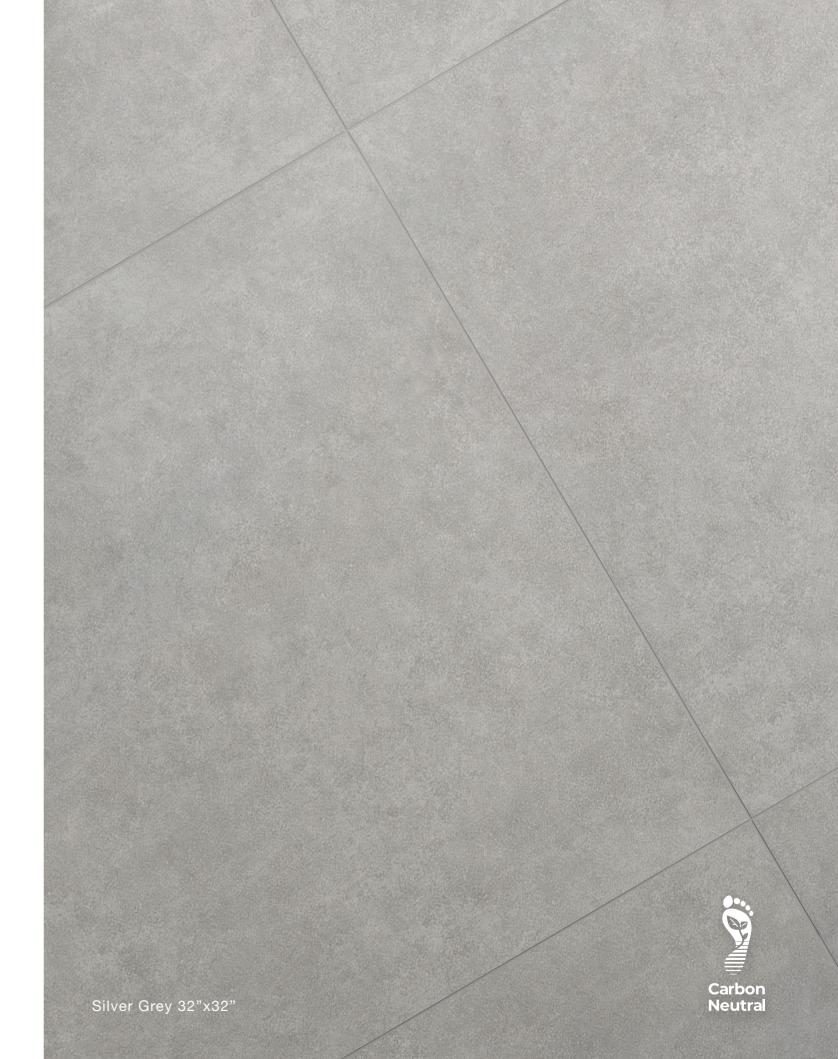

SIZES & COLORS

color body 🚱

Colors	12" x 24" rectified	16" x 32" rectified	32" x 32" rectified	12"X12" mosaic	3"x12" bullnose	6"x12" cove base
IVORY	1102930	1102912	1102949	1102955	1102961	1102967
SILVER GREY	1102931	1102913	1102950	1102956	1102962	1102968
SAND	1102932	1102914	1102951	1102957	1102963	1102969
TORTORA	1102933	1102915	1102952	1102958	1102964	1102970
ESPRESSO	1102934	1102916	1102953	1102959	1102965	1102971
MIDNIGHT	1102935	1102917	1102954	1102960	1102966	1102972


















Colors shown may vary from actual product.

Final selection should be made from actual product samples.

Note: Sizes listed are nominal.

30

6"x12" COVE BASE

	SIZES		THICKNESS (MM)	PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
	FIELD TILES								
)	6"x24" PRESSED	NOMINAL	8 mm	15	15 SF	49.5	48	720 SF	2,376
	12"x24" RECTIFIED	NOMINAL	8 mm	8	16 SF	52.8	48	768 SF	2,534
	16"x32" RECTIFIED	NOMINAL	10 mm	4	14.22 SF	62.58	24	341.33 SF	1,502
	32"x32" RECTIFIED	NOMINAL	10 mm	2	14.22 SF	62.58	40	568.88 SF	2,503
	MOSAIC AND COORDINATING TRIMS								
	12"x12" MOSAIC (2"x2" - 36 DOT)	NOMINAL	8 mm	10	10 PCS	33	45	450 PCS	1,485
	3"x12" BULLNOSE	NOMINAL	8 mm	15	15 PCS	14.55	168	2,520 PCS	2,444
	·								

10 PCS

17.5

640 PCS

Minimum grout size recommended = 5 mm (or approx. 3/16") If staggered tile placement, we recommend using a 30% offset. If specified brick pattern with 1/2 pattern mandatory, a bigger grout is recommended to hide imperfections of installation (minimum 1/4").

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.

NOMINAL

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE®STONE VALUES
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
^	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
*	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42% WET	≥0.42% WET
*	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
۵	BREAKING STRENGTH	ASTM C648	≥250 lb/ft²	8mm ≥300 lb/ft² 10mm ≥400 lb/ft²
*	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
H	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
1	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

[•] Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

PLASTER 2.0 / MADE IN THE USA.

Green Memberships & Accredations

DESCRIPTION

	DESCRIPTION
Solution Consumer The Concled Consumer The Concled Consumer The Consum	Defines post-consumer content of as much as 3% recycled glass which reduces landfill impact.
Consume The Cover	Defines pre-consumer content of as much as 45% recycled material which reduces our carbon footprint.
	Florim USA sources >95% raw material within a 500 mile radius, which results in a smaller carbon footprint.
G GREEN SQUARED	Tile Council of North America and the American National Standards Institute's standard for sustainability and environmental impact.
Environment PRIORITY ONE	A declaration that Florim USA values the environment and works daily to minimize our adverse impact upon it.
VERSION 2.0	The Health Product Declaration Collaborative transparency declaration for all of Florim USA's naturally occurring materials.
Certified Environmental Product Declaration www.nsf.org	Certification of plant and product specific Environmental Product Declaration (EPD) which tracks environmental impacts from the production of porcelain tile.
GREENGUARD ***********************************	Underwriter's Laboratories certification of low emitting materials. Florim USA is Green Guard Gold certified.
Product Certification BUREAU VERITAS Certification	Bureau Veritas Standards Program verifies and certifies both pre- and post-consumer recycled content.
TILE COUNCIL OF NORTH AMERICA, INC.	Florim USA actively participates in the Tile Council of North America which allows us to be on the forefront of advances in the tile industry and its standards.
STEMBER DE STEMBER	USGBC is committed to suit a more sustainable life. Florim USA supports this mission by manufacturing products which aid architects in achieving USGBC certification.
INTERNATIONAL LIVING FUTURE INSTITUTE	Florim USA's sustainability and social practices support the mission of The International Living Future Institure which strives to create a socially just, culturally rich, and ecologically restorative community.
	The Tennessee Recycling Coalition is dedicated to promoting recycling and sustainable material management practices, and awarded Florim USA the Tennessee Recycler of the Year award for 2020.

31

^{*}WEIGHT PER PALLET DOES NOT INCLUDE pallet WEIGHT itself. All other sizes will be packaged as ordered.

CLEANING & MAINTENANCE

Porcelain tiles are low-maintenence, moisture-resistant, scratch-resistant, and stain-resistant. Completely inhospitable to germs and bacteria, porcelain tile is also among the easiest flooring material to clean and maintain.

Routine Care Instructions:

- 1. Sweep or vacuum loose dust and debris from the floor.
- 2. Mop the floor with a mild cleaning solution (wax, oil-based, and abrasive cleaners are not recommended).
- 3. Rinse thoroughly with clean, clear water.
- 4. (Optional) Dry the floor using a clean cloth to increase shine and prevent water spots.

Note: For desired results, it is particularly important to combine the effect of the cleaning solution with a vigorous mechanical cleaning action.

USAGE AND FEATURES











PROGRESS THAT INVESTS IN THE ENTIRE SOCIETY

As an active member of the U.S Green Building Council, MILE®stone spreads awareness to the community and encourages the use of building solutions through environmentally friendly practices. Our products positively contribute to the requirements for obtaining the LEED (Leadership in Energy and Environmental Design) and WELL (IWBI) certifications.

A COMMITMENT TO ENVIRONMENTAL SUSTAINABILITY AND RESPONSIBILITY

We are committed to conscious development that minimizes the negative impact of manufacturing production on the environment. Our general approach to sustainability intersects with our business strategy to embrace three areas of responsibility: economic, social, and environmental. Some ways we prove this are:

- Products containing as much as 45% recycled content.
- Post-consumer recycled content levels as much as 3%.
- Zero industrial wastewater discharge.
- A 99% internal process recycling rate.
- Local sourcing of >95% raw materials (within 500-mile radius of factory) resulting in low transportation related carbon emissions.

MILE®stone is taking these and other steps, as well as actively investing to reduce carbon emissions to ensure that we reach full carbon neutrality by 2030.





