
# +ONE





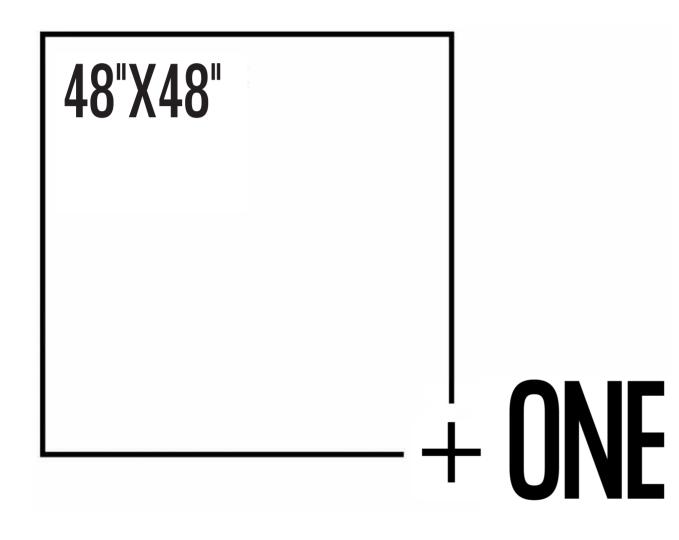

## CONCRETE BEAUTY

+ ONE's contemporary soul, which captures the look and the essence of poured concrete, is capable of creating a clean and simple style and giving each project a personal warm feeling and great visual charm. Its extreme attention to detail gives the environment elegance and vitality. Six outstanding color options and two finishes tell the inspiration of the authentic American industrial design, perfect for both residential and high-traffic commercial projects.


Six colors: chalk, greige, mud, ash, plumb and coal. Available in 12"x24", 24"x24", 24"x48", and 48"x48" floor & wall tile, 12"x12" mosaics.

Floor: +One\_48"x48"\_Greige\_Matte



# +ONE CONCRETE BEAUTY

4 Sizes: 12"x24" - 24"x24" - 24"x48" - 48"x48" (only matte) - 10 mm 6 Colors: Chalk, Greige, Mud, Ash, Plumb, Coal 2 Surfaces: Matte & Polished

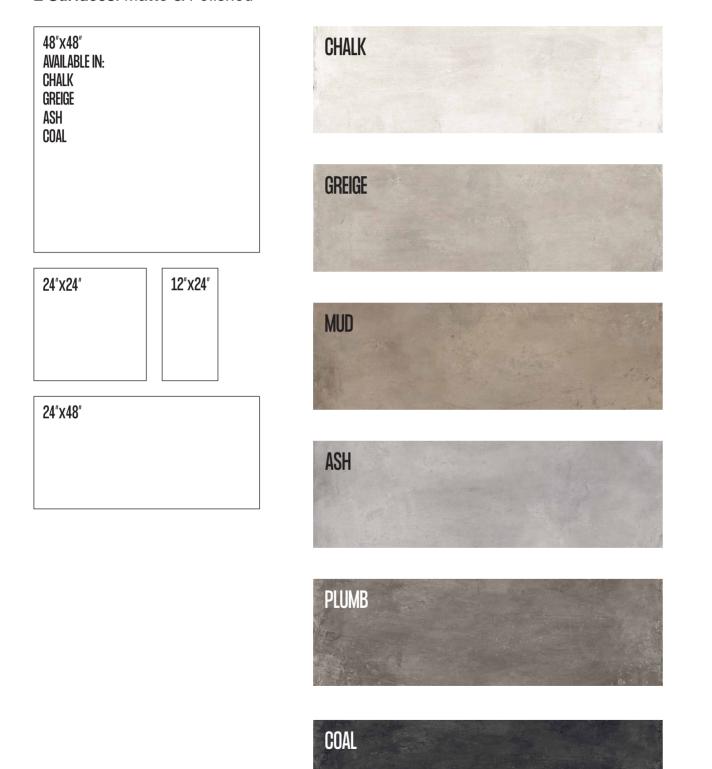

# CANVAS

1 Size: 12"x24" - 10 mm 2 Colors: White and Moka 2 Surfaces: Matte & Polished



# OUTDOOR 22M

3 Sizes: 12"x48" - 24"x24" - 24"x48" - 20 mm 3 Colors: Chalk, Greige, Ash 1 Surface: Matte

24"x24"		
24"x48"		
12"x48"		




Available in:





Sizes, mosaic and trim pieces

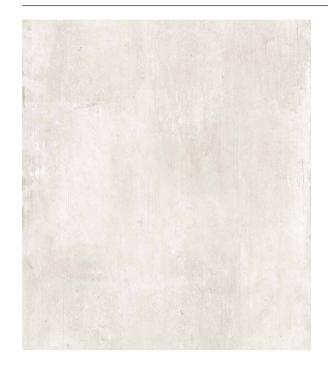

Thickness 10mm 12"x24" - 1101130 Matte 12"x24" - 1101226 Polished 24"x24" - 1101112 Matte 24"x24" - 1101208 Polished 24"x48" - 1101088 Matte 24"x48" - 1101184 Polished 48"x48" - 1103357 Matte

Thickness 20mm 12"x48" - 1101411 Matte 24"x24" - 1101414 Matte 24"x48" - 1101841 Matte



12"x12" Mosaic (2"x2" - 36 dot) 1101148 Matte 1101238 Polished

	_	

3"x24" Bullnose 1101142 Matte 1101232 Polished



Sizes, mosaic and trim pieces



# ASH

Sizes, mosaic and trim pieces



## GREIGE

Sizes, mosaic and trim pieces



Thickness 10mm
12"x24" - 1101131 Matte
12"x24" - 1101227 Polished
24"x24" - 1101113 Matte
24"x24" - 1101209 Polished
24"x48" - 1101089 Matte
24"x48" - 1101185 Polished
48"x48" - 1103358 Matte

Thickness 20mm 12"x48" - 1101412 Matte 24"x24" - 1101415 Matte 24"x48" - 1101842 Matte

12"x12" Mosaic (2"x2" - 36 dot) 1101149 Matte 1101239 Polished

3"x24" Bullnose 1101143 Matte



1101233 Polished

6"x12" Cove Base (\*special order only) 1101137



+ONE

Thickness 10mm 12"x24" - 1101132 Matte 12"x24" - 1101228 Polished 24"x24" - 1101114 Matte 24"x24" - 1101210 Polished 24"x48" - 1101090 Matte 24"x48" - 1101186 Polished

	 _	_	

12"x12" Mosaic (2"x2" - 36 dot) 1101150 Matte 1101240 Polished



3"x24" Bullnose 1101144 Matte 1101234 Polished



6"x12" Cove Base (\*special order only) 1101138

Thickness 10mm

- 12"x24" 1101133 Matte 12"x24" - 1101229 Polished
- 24"x24" 1101115 Matte
- 24"x24" 1101211 Polished
- 24"x48" 1101091 Matte
- 24"x48" 1101187 Polished
- 48"x48" 1103359 Matte

#### Thickness 20mm

12"x48" - 1101413 Matte 24"x24" - 1101416 Matte 24"x48" - 1101843 Matte

12"x12" Mosaic (2"x2" - 36 dot) 1101151 Matte 1101241 Polished



3"x24" Bullnose 1101145 Matte 1101235 Polished



6"x12" Cove Base (\*special order only) 1101139




#### Sizes, mosaic and trim pieces



#### Thickness 10mm 12"x24" - 1101134 Matte 12"x24" - 1101230 Polished 24"x24" - 1101116 Matte





12"x12" Mosaic (2"x2" - 36 dot) 1101152 Matte 1101242 Polished



3"x24" Bullnose 1101146 Matte 1101236 Polished



## COAL

Sizes, mosaic and trim pieces



Thickness 10mm 12"x24" - 1101135 Matte 12"x24" - 1101231 Polished 24"x24" - 1101117 Matte 24"x24" - 1101213 Polished 24"x48" - 1101093 Matte 24"x48" - 1101189 Polished 48"x48" - 1103360 Matte

$\square$			
$\square$			

12"x12" Mosaic (2"x2" - 36 dot) 1101153 Matte 1101243 Polished



3"x24" Bullnose 1101147 Matte 1101243 Polished



6"x12" Cove Base (\*special order only) 1101141

## CANVAS WHITE

Sizes, mosaic and trim pieces



## CANVAS MOKA

Sizes, mosaic and trim pieces




+One Canvas by MILE<sup>®</sup>*stone* presents the sleek, modern personality of American industrial design combined with stained concrete. A different view on concrete beauty, the matte or polished finishes pair perfectly with traditional and contemporary design projects.

Two colors: white and moka. Available in 12"x24" floor and wall tile options.

Thickness 10mm 12"x24" - 1101254 White Matte 12"x24" - 1101266 White Polished

Thickness 10mm 12"x24" - 1101255 Moka Matte 12"x24" - 1101267 Moka Polished







Floor: +One\_24"x48"\_Greige\_Matte Backsplash:+One\_12"x24"\_Greige\_Polished



Wall: +One\_12"x24"\_ Canvas White\_Polished




Floor: +One\_24"x24"\_Mud\_Matte Wall: +One\_12"x24"\_Canvas Moka\_Matte





Floor: +One\_24"x24"\_Plumb\_Matte Backsplash: +One\_12"x12"\_Mosaic\_Plumb\_Polished

R

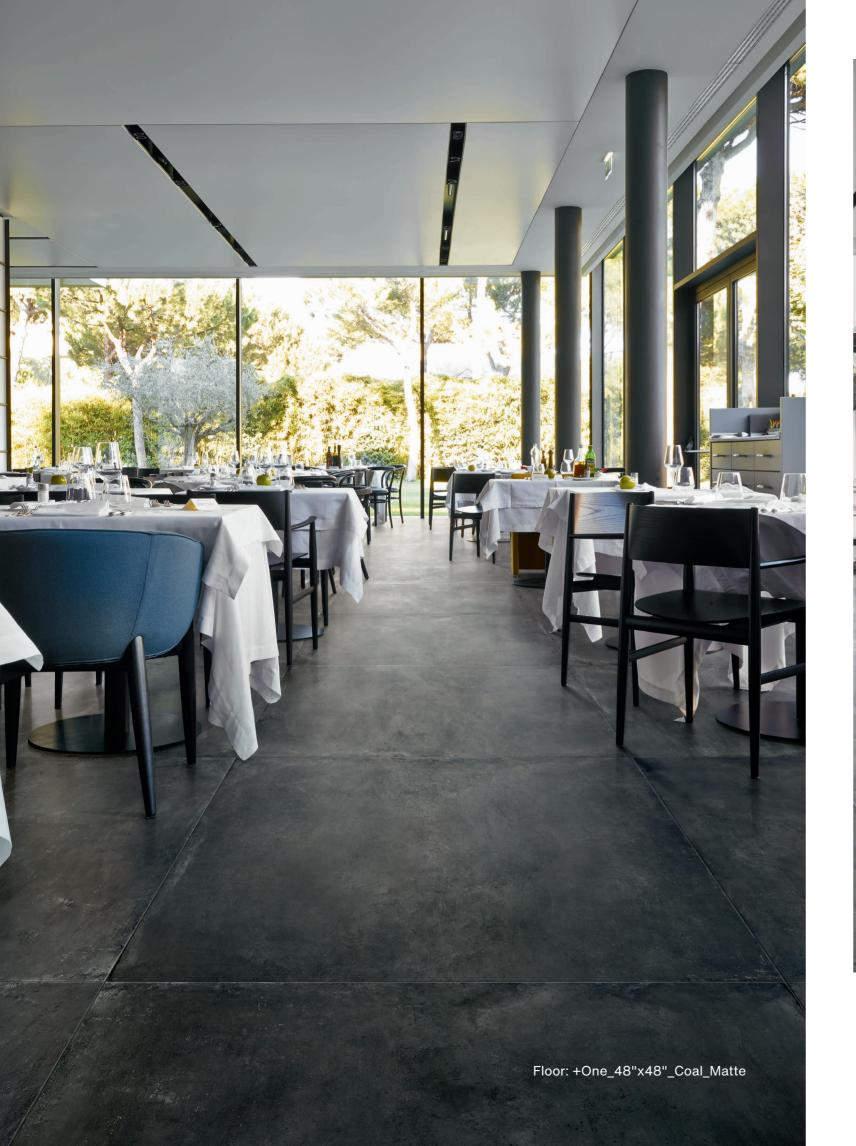




Floor: +One\_24"x48"\_Coal\_Matte



Floor: +One\_12"x48"\_24"x24"\_Chalk\_2CM

3 (m. 6) 6

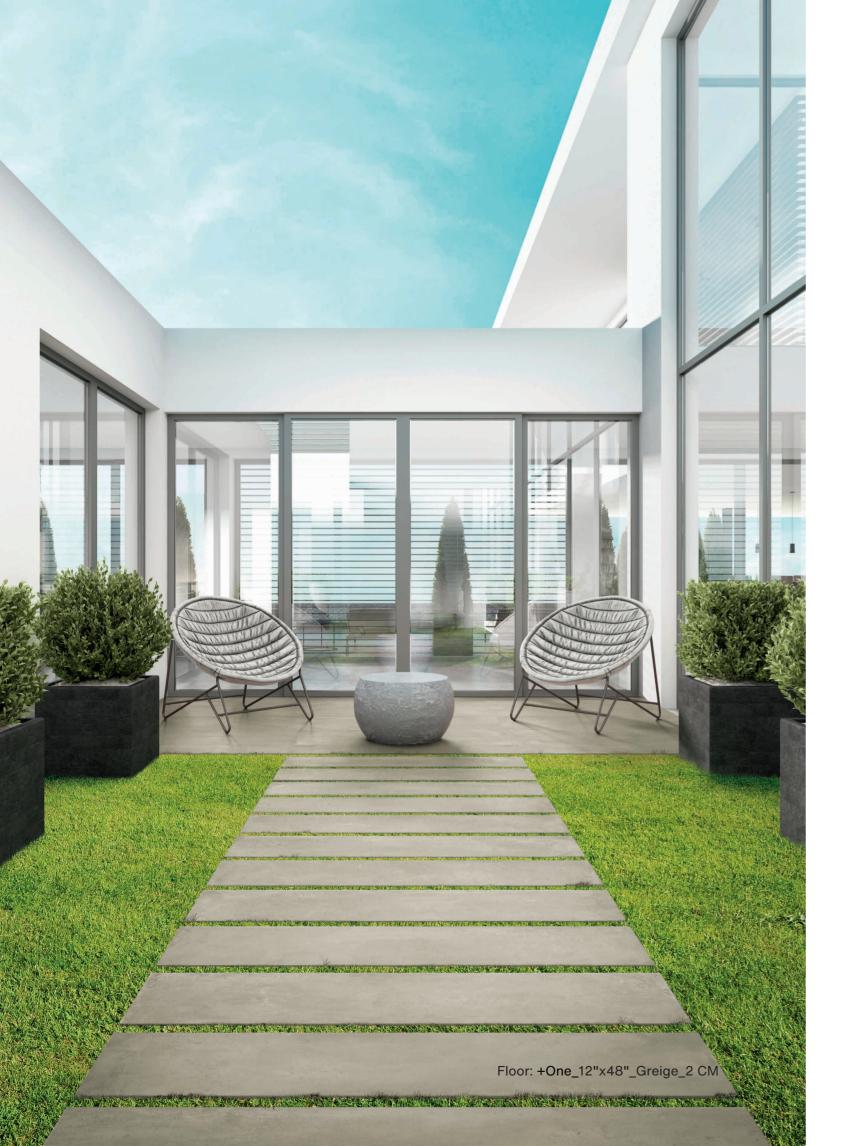



Floor: +One\_24"x24"\_Ash\_2 CM

## Rectified-color body

CANVAS

WHITE

CANVAS

MOKA

1101254 Matte

1101266 Polished

1101255

Matte

1101267 Polished

-

-

\_

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

#### COLOR BODY

										$\smile$
Colors	12"x24" 10 mm	24"x24" 10 mm	24"x48" 10 mm	48"x48" 10 mm	12"x48" 2 cm	24"x24" 2 cm	24"x48" 2 cm	12"x12" mosaic (2"x2")	3"x24" bulinose	6"x12" cove base
CHALK	1101130 Matte 1101226 Polished	1101112 Matte 1101208 Polished	1101088 Matte 1101184 Polished	1103357 Matte	1101411 Matte	1101414 Matte	1101841 Matte	1101148 Matte 1101238 Polished	1101142 Matte 1101232 Polished	1101136
GREIGE	1101131 Matte 1101227 Polished	1101113 Matte 1101209 Polished	1101089 Matte 1101185 Polished	1103358 Matte	1101412 Matte	1101415 Matte	1101842 Matte	1101149 Matte 1101239 Polished	1101143 Matte 1101233 Polished	1101137
MUD	1101132 Matte 1101228 Polished	1101114 Matte 1101210 Polished	1101090 Matte 1101186 Polished	-	-	-	-	1101150 Matte 1101240 Polished	1101144 Matte 1101234 Polished	1101138
ASH	1101133 Matte 1101229 Polished	1101115 Matte 1101211 Polished	1101091 Matte 1101187 Polished	1103359 Matte	1101413 Matte	1101416 Matte	1101843 Matte	1101151 Matte 1101241 Polished	1101145 Matte 1101235 Polished	1101139
PLUMB	1101134 Matte 1101230 Polished	1101116 Matte 1101212 Polished	1101092 Matte 1101188 Polished	-	-	-	-	1101152 Matte 1101242 Polished	1101146 Matte 1101236 Polished	1101140
COAL	1101135 Matte 1101231 Polished	1101117 Matte 1101213 Polished	1101093 Matte 1101189 Polished	1103360 Matte	-	-	-	1101153 Matte 1101243 Polished	1101147 Matte 1101243 Polished	1101141

## Packaging Specifications

SIZES FIELD TILES		THICKNESS (MM)	PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
12"x24" RECTIFIED MATTE/POLISHED	NOMINAL	10 mm	6	12 SF	52.8 LBS	48	576 SF	2,535 LBS
24"x24" RECTIFIED MATTE/POLISHED	NOMINAL	10 mm	3	12 SF	52.8 LBS	36	432 SF	1,901 LBS
24"x48" RECTIFIED MATTE/POLISHED	NOMINAL	10 mm	3	24 SF	115 LBS	21	504 SF	2,419 LBS
48"x48" RECTIFIED MATTE	NOMINAL	10 mm	2	31 SF	117,8 LBS	20	620 SF	2,356 LBS
12"x48" RECTIFIED MATTE	NOMINAL	20 mm	4	16 SF	147 LBS	16	256 SF	2,352 LBS
24"x24" RECTIFIED MATTE	NOMINAL	20 mm	2	8 SF	76 LBS	36	288 SF	2,736 LBS
24"x48" RECTIFIED MATTE	NOMINAL	20 mm	2	16 SF	152 LBS	16	256 SF	2,432 LBS
CANVAS								
12"x24" RECTIFIED MATTE / POLISHED	NOMINAL	10 mm	6	12 SF	52.8	48	576 SF	2,535
MOSAIC AND COORDINATING TRIMS								
12"x12" MOSAIC (2"x2" - 36 DOT) MATTE / POLISHED	NOMINAL	10 mm	10	10 PCS	35	45	450 PCS	1,575
3"x24" BULLNOSE MATTE / POLISHED	NOMINAL	10 mm	12	12 PCS	25.2	48	576 PCS	1,201
6"x12" COVE BASE MATTE	NOMINAL	7 mm	10	10 PCS	17.5	64	640 PCS	1,120

\*WEIGHT PER PALLET DOES NOT INCLUDE pallet WEIGHT itself. All other sizes will be packaged as ordered. Please contact MILE®stone Customer Service at 1-877-356-7461 for packaging information. Minimum grout size recommended = 5 mm (or approx. 3/16") If staggered tile placement, we recommend using a 30% offset. If specified brick pattern with 1/2 pattern mandatory, a bigger grout is recommended to hide imperfections of installation (minimum 1/4").

### Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE®sto	one VALUES
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0	.4%
		ASTM C373	0.5%	absorption America	the water criteria of the n national urd PTCA
*	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.		ILL / COMMERCIAL
~	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AF	FECTED
*	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42 WET		2 WET
*	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	≥0.42 WET 2CM	
ڡ۫	BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf	
ڡ۠	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
**	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in ( ±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
н	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
н	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
ī	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.	04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficent of friction may vary within and between product runs.

## Progress that invests in the entire society

As an active member of the U.S Green Building Council, MILE<sup>®</sup> stone spreads awareness to the community and encourages the use of building solutions through environmentally friendly practices. Our products positively contribute to the requirements for obtaining the LEED (Leadership in Energy and Environmental Design) and WELL (IWBI) certifications.

#### A commitment to environmental sustainability and responsibility

We are committed to conscious development that minimizes the negative impact of manufacturing production on the environment. Our general approach to sustainability intersects with our business strategy to embrace three areas of responsibility: economic, social, and environmental. Some ways we prove this are:

- Products containing as much as 45% recycled content.
- Post-consumer recycled content levels as much as 3%.
- · Zero industrial wastewater discharge.
- A 99% internal process recycling rate.
- Local sourcing of >95% raw materials (within 500-mile radius of factory) resulting in low transportation related carbon emissions.

MILE<sup>®</sup> stone is taking these and other steps, as well as actively investing to reduce carbon emissions to ensure that we reach full carbon neutrality by 2030.



#### Cleaning & Maintenance / Routine Care Instructions



Scan the QR code with your smartphone.

## Green Certifications & Accreditations

#### DESCRIPTION

	DESCRIPTION
Rescied Conte	Defines post-consumer content of as much as 3% recycled glass which reduces landfill impact.
Recycled Conte	Defines pre-consumer content of as much as 45% recycled material which reduces our carbon footprint.
	Florim USA sources >95% raw material within a 500 mile radius, which results in a smaller carbon footprint.
G GREEN SQUARED	Tile Council of North America and the American National Standards Institute's standard for sustainability and environmental impact.
DERIVICIONE PRIORITY ONE	A declaration that Florim USA values the environment and works daily to minimize our adverse impact upon it.
VERSION 2.0	The Health Product Declaration Collaborative transparency declaration for all of Florim USA's naturally occurring materials.
Red List Free Declare.	Declare labels disclose all intentionally added ingredients and residuals present in the final product. Being Red List Free means the worst materials, chemicals, and elements for human and environmental health are not present within our products.
Certified Environmental Product Declaration www.nsf.org	Certification of plant and product specific Environmental Product Declaration (EPD) which tracks environmental impacts from the production of porcelain tile.
CREEDCARD CRECULARD The control of the control of the control of the control of the control of the control	Underwriter's Laboratories certification of low emitting materials. Florim USA is Green Guard Gold certified.
Product Certification BUREAU VERITAS Certification	Bureau Veritas Standards Program verifies and certifies both pre- and post- consumer recycled content.
TILE COUNCIL OF NORTH AMERICA, INC.	Florim USA actively participates in the Tile Council of North America which allows us to be on the forefront of advances in the tile industry and its standards.
CONDUCTOR OF CONTURNED	USGBC is committed to suit a more sustainable life. Florim USA supports this mission by manufacturing products which aid architects in achieving USGBC certification.
INTERNATIONAL LIVING FUTURE INSTITUTE	Florim USA's sustainability and social practices support the mission of The International Living Future Institute which strives to create a socially just, culturally rich, and ecologically restorative community.
	The Tennessee Recycling Coalition is dedicated to promoting recycling and sustainable material management practices, and awarded Florim USA the Tennessee Recycler of the Year award for 2020.

This product meets or exceeds all standards described in ANSI A137.1. Este product cumple o exceed todos los estandares de ANSI A137.1.





