REBELS





REBELS


Art infused practice transforming rebelliousness in creativity, freshness that adds value, identity...

Experience our cool colour notes, contrasts in gloss and matt and present your spaces the way you are.

Rebel and think for yourself

01. SIZES, COLOURS AND FINISHES / pag. 4 FORMATOS, COLORES Y ACABADOS 02. GET INSPIRED / pag. 6 INSPÍRATE 03. TECHNICAL DRAWINGS / pag. 28 DIBUJOS TÉCNICOS 04. pag. 29 PACKING 05. PRICE CODE pag. 29 CÓDIGO DE TARIFA 06. RECOMMENDATIONS / pag. 30 RECOMENDACIONES 07. TECHNICAL FEATURES / pag. 31 CARACTERÍSTICAS TÉCNICAS



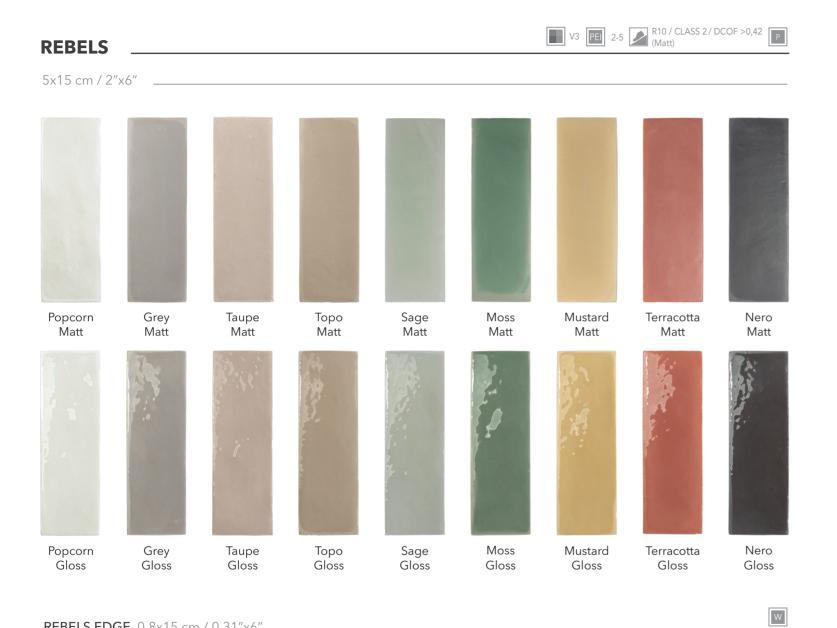

REBELS EDGE 0,8x15 cm / 0.31"x6"

Available in all colours / Disponible en todos los colores.









Rebels Terracotta Matt & Topo Matt Rebels Edge Terracotta Matt

Floor Tiles: Bejmat Square Tan






Rebels Terracotta Matt - 96% **Rebels** Nero Gloss - 4%

Rebels Terracotta Gloss - 50% Rebels Popcorn Matt - 33,33% Rebels Nero Matt - 16,67%

Floor Tiles: Rebels Terracotta Matt





Rebels Moss Gloss - 50%
Rebels Moss Matt - 50%

Floor Tiles: Tanka Graphite (Ensō Collection)





Rebels Nero Matt



Rebels Popcorn Gloss 🕨

C

C E R E A L C F K F V F





Rebels Mustard Matt, Nero Matt & Nero Gloss
Floor Tiles: Mud Old White



Rebels Mustard Gloss **•**



Rebels Grey Gloss & Matt ►







▲ SB Taupe Gloss

Floor Tiles: Abbey Stone S Cluny



Rebels Topo Matt

|21






Rebels Sage Gloss - 75% ► Rebels Sage Matt - 25%

Floor Tiles: Suit Ona (Tesserae Collection)



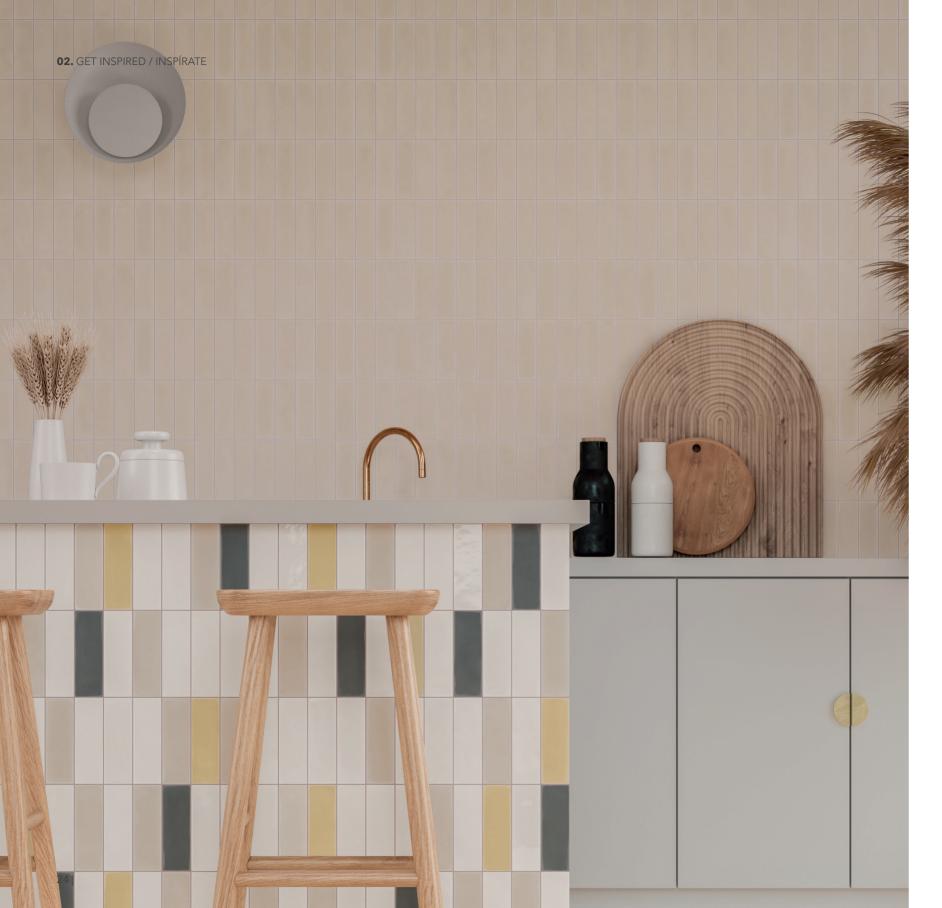



Rebels Taupe Matt, Popcorn Gloss, Popcorn Matt, Mustard Matt & Nero Matt

Floor Tiles: Roots M & L Sand

02. GET INSPIRED / INSPÍRATE



Rebels Sage Gloss, Grey Gloss, Grey Matt, Popcorn Matt & Popcorn Gloss Rebels Edge Popcorn Matt



26 |


04. PACKING



REBELS

				FT2		F12
Model	Size (in)	Pieces/box	lb/box	sq ft/box	Box/pallet	sq ft/pallet
Rebels	2″x6″	75	21.60 lb	5.737 sq ft	100	573.700 sq ft
Rebels Edge	0.33″x6″	10	0.53 lb	4.839 ft	200	967.800 ft

REBELS EDGE

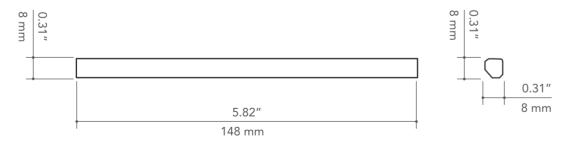

REBELS

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore , all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems. For an optimal result we advise to use 1,5 mm (0.06") grout.

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes. As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

CHROMATIC VARIATION

Rebels Collection has been designed with a medium chromatic variation between pieces. Prior to any installation, range of tiles should be checked by the client. No claims will be accepted after installation.

WARNING!

This collection reproduces traditional hand made tiles, this is the reason why there are slight dimentional differences between pieces (variable lengths and widths), which are part of the intended aesthetic. It is advised to adjust each one of the pieces in the process of installation due to the dimentional differences, instead of using spacers. As a result, these differences give the character, craftsman feel and a high aesthetic value.

Dry-pressed porcelain tiles whith water absorption B Ia \leq 0,5% for interior and exterior floors and walls.

	FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA
Î	Dimensional Features	48 mm +/- 0,9 mm x 148 mm +/- 0,6% x 8,5 mm	UNE-EN ISO 10545-2:1998
••• \$	Water absorption	$E_b \leq 0.5\%$	UNE-EN ISO 10545-3:1997
$\begin{array}{c} \downarrow \\ \uparrow \uparrow \end{array}$	Modulus of rupture	Minimum 35 N/mm2 Individual Minimum 32 N/mm2	UNE-EN ISO 10545-4:2012
PEI	Abrasive resistance	PEI 4: Popcorn PEI 3: Grey, Topo, Taupe & Sage PEI 2: Nero , Moss, Terracotta & Mustard	UNE-EN ISO 10545-7:1999
-≁-	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
	Frost resistance	Pass	UNE-EN ISO 10545-11:1997
Ŷ	Household products resistance	GA	UNE-EN ISO 10545-13:1998
\sim	Chemical resistance	GHA	UNE-EN ISO 10545-13:1998
	Stain resistance	5	UNE-EN ISO 10545-14:1998
	Non-slip value	Matt Colours: R10 / CLASS 2 / DCOF >0,42 Glossy Colours: Not Comply	DIN 51130:2014 ANSI A137.1:2012
	Tone variation	Medium	-
Р	Porcelain body	-	-
			<u> </u>

Designed by



©2022 Tendencias Cerámicas WOW, registered trademark of Tendencias Cerámicas, S.L.

The brand use or reproduction of the contents of this catalog, is protected by copyright law. Any use of the brand or reproduction thereof, in part or total, must be authorized by Tendencias Cerámicas, S.L. Otherwise, this action can be sanctioned according to the Law.

Г

L

WOW reserves the right to modify and/or discontinue certain models displayed in this catalogue. The colour of the pieces displayed herein may differ slightly from originals. The settings shown in this catalogue are design proposals for advertising purposes. In real situations in wich the pieces are laid, the installation instructions published by WOW should be followed. 

