



01 . INTRO	pag. 3
02. SIZES, COLOURS AND FINISHES / FORMATOS, COLORES Y ACABADOS	pag. 4
03. RECOMMENDATIONS / RECOMENDACIONES	pag. 34
04. TECHNICAL FEATURES / CARACTERÍSTICAS TÉCNICAS	pag. 35
05. TECHNICAL DRAWINGS / DIBUJOS TÉCNICOS	pag. 36
06. Packing	pag. 37
07. PRICE CODE / CÓDIGO DE TARIFA	pag. 38

01. INTRO


Curtsey to the Imperial Moroccan city of **Fez** and its worldwide famous craft skills, considered as an alive cultural treasure.

beauty and practicality, they are suitable for any neat environment.

How to choose between the range of suggestive colours? glossy translucent finishes, soft mats, metallics in steel and copper sized 6.2x12,5cm (2.5"x5") Twenty delightful alternatives full of life.

New contours into a perfect balance.

Designed with a traditional approach, that combines

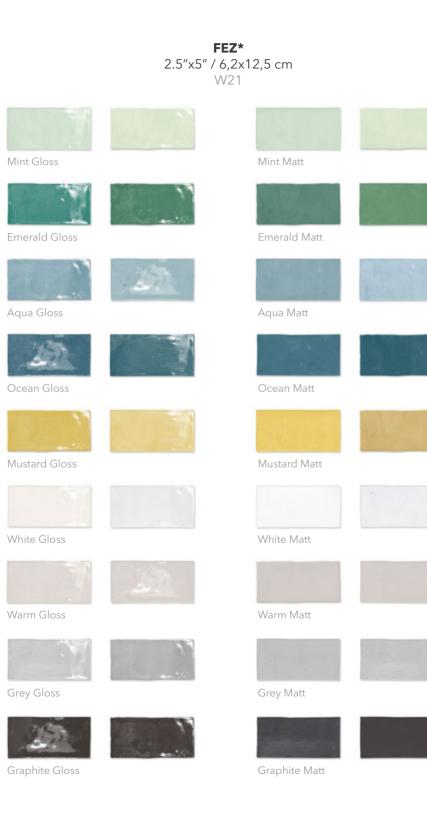


Copper Gloss Steel Gloss **ROUNDED EDGE FEZ** 0.43"x5" / 1,1x12,5 cm WS3

Available in all colours. Disponible en todos los colores.

W36

*Different colour shades randomly mixed within the box. *Diferentes tonalidades encajadas aleatoriamente.

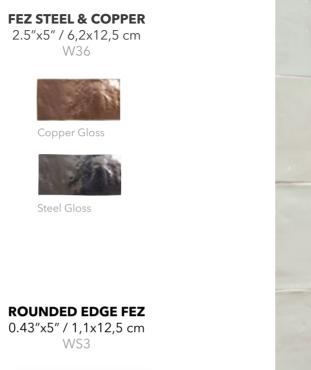







Fez Emerald Matt

Floor tiles: **Concrete Crayon Light Grey** by Love Affairs Collection



Fez Emerald Gloss


0

Floor tiles: **Cottage Grey** by Cottage Collection



Fez Aqua Matt

Hexa Cottage White by Cottage Collection









Fez Ocean Gloss

Floor tiles
Cottage White by Cottage Collection

Fez Ocean Matt

Floor tiles **Hexa Cottage Grey** by Cottage Collection

02. SIZES, COLOURS AND FINISHES / FORMATOS, COLORES Y ACABADOS

e ?e







Mustard Matt White Gloss



Mustard Gloss

White Gloss & Matt





Fez White Matt

Floor tiles: Hexa Cottage Cotto by Cottage Collection





Warm Gloss

Warm Matt



Fez Grey Gloss

Floor tiles **Hexa Cottage Graphite** by Cottage Collection



Grey Gloss & Matt

02. SIZES, COLOURS AND FINISHES / FORMATOS, COLORES Y ACABADOS



Ľ



Fez Grey Gloss Rounded Edge Fez Grey Gloss








Fez Graphite Matt

Floor tiles Hexa Cottage White & Grey by Cottage Collection

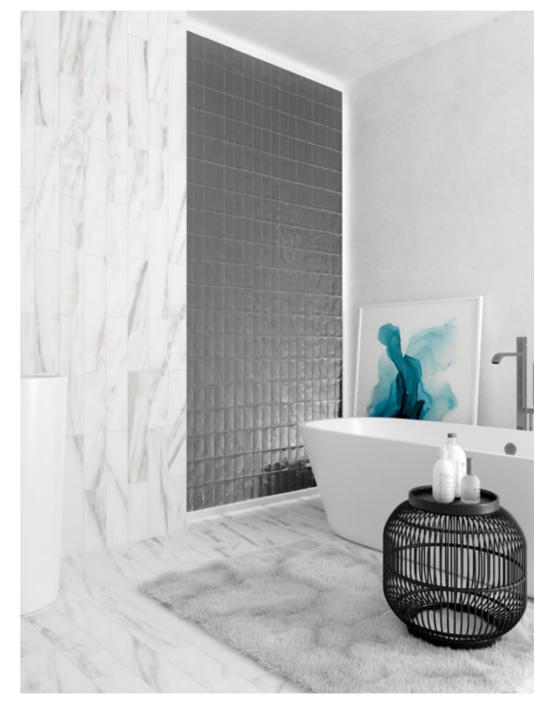

Fez Steel Gloss

Steel Gloss


Floor tiles: Calacatta Strip by Love Affairs Collection



Fez Copper Gloss

Floor tiles: **Aura Strip** by Love Affairs Collection





WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore , all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems. For an optimal result, we advise to use 1 mm (0.04").

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

STRONG CHROMATIC VARIATION

Fez Collection has been designed with a strong chromatic variation between pieces. Prior to any installation, range of tiles should be checked by the client. No claims will be accepted after installation.





Stain resistance

Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%)

RÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA		
	62 mm +/- 0,75 mm x 125 mm +/- 0,75 mm	UNE-EN ISO 10545-2:1998		
	E _b >10%	UNE-EN ISO 10545-3:1997		
d	Thickness ≥ 7,5 mm mínimo 12 N/mm² Thickness < 7,5 mm mínimo 15 N/mm²	UNE-EN ISO 10545-4:2012		
	Pass (Except metallic finishes)	UNE-EN ISO 10545-11:1997		
esistance	GA	UNE-EN ISO 10545-13:1998		
	GHA (Except metallic finishes)	UNE-EN ISO 10545-13:1998		
	Class 5	UNE-EN ISO 10545-14:1998		

05. TECHNICAL DRAWINGS / DIBUJOS TÉCNICOS

06. PACKING



			LB	FT2		Fr2
Model	Size (in)	Pieces/box	lb/box	sq ft/box	Box/pallet	sq ft/pallet
Fez	2.5″x5″	62	18.19 lb	5.210 sq ft	102	531.42 sq ft
Rounded Edge	0.43″x5″	40	1.32 lb	16.27 ft	350	3,254.59 ft





©2021 Tendencias Cerámicas WOW, registered trademark of Tendencias Cerámicas, S.L.

The brand use or reproduction of the contents of this catalog, is protected by copyright law. Any use of the brand or reproduction thereof, in part or total, must be authorized by Tendencias Cerámicas, S.L. Otherwise, this action can be sanctioned according to the Law.

Г

L

Г

WOW reserves the right to modify and/or discontinue certain models displayed in this catalogue. The colour of the pieces displayed herein may differ slightly from originals. The settings shown in this catalogue are design proposals for advertising purposes. In real situations in wich the pieces are laid, the installation instructions published by WOW should be followed.

| 39



