

Icona



**La dolce vita.
A distinctive
trend.**



ICONA 1020CM



Six pastel tones.

ICONA 1020LM - ICONA1 1020LM



ICONA 1020VO

A new, small and rectangular format.



ICONA 1020FL

Fior di latte white or peppermint milk green?



ICONA11020VO



ICONA11020FL



Contemporary mood.



ICONA 1020VO - ICONA 1020LM



ICONA 1020LM

Inspired by the gentle and discreet elegance of the 1960s.



ICONA 1020FL - ICONA 1020G

ICONA 1020CM - ICONA11020CM - AZMA 60G RM



ICONA 1020S




ICONA 1020S - AZMA 60CG RM




ICONA 1020G


DOUBLE-FIRED WALL TILE ISO 13006 - G - BIII GL (E ≥ 10%) UNI EN 14411 - L

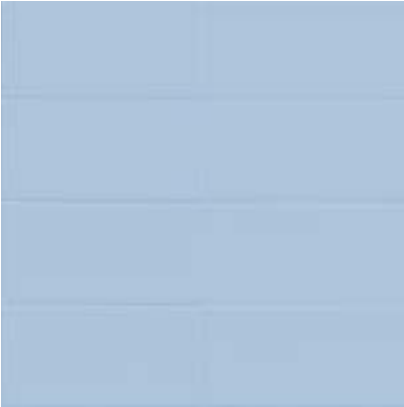

ICONA 1020CM
10X20-4"X8" *Celeste Medio*

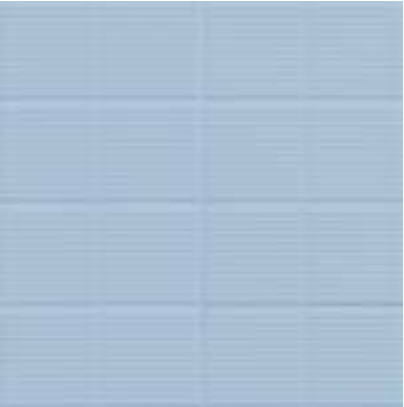

ICONA1 1020CM
10X20-4"X8"

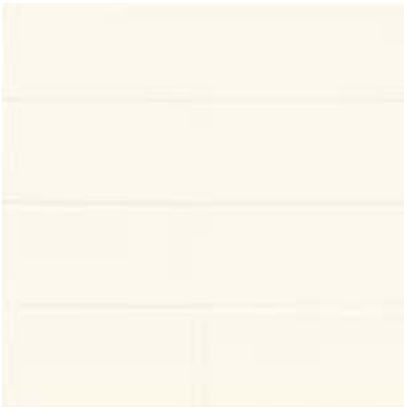

ICONA 1020FL
10X20-4"X8" *Fior di Latte*




ICONA1 1020FL
10X20-4"X8"




ICONA 1020G
10X20-4"X8" *Grigio*




ICONA1 1020G
10X20-4"X8"

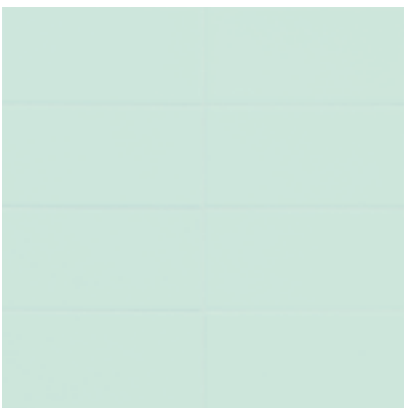


ICONA 1020LM
10X20-4"X8" *Latte Menta*

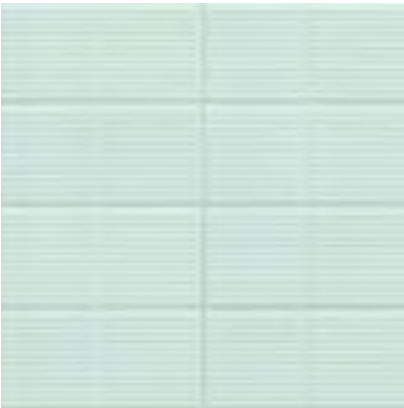


ICONA1 1020LM
10X20-4"X8"

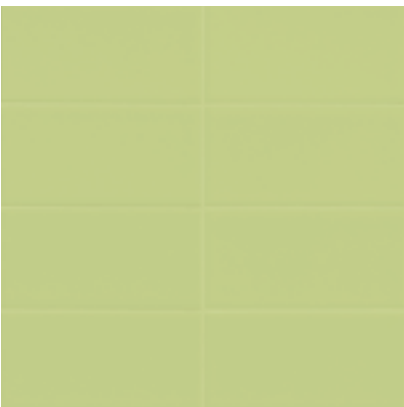


ICONA 1020VO
10X20-4"X8" *Verde Oasi*

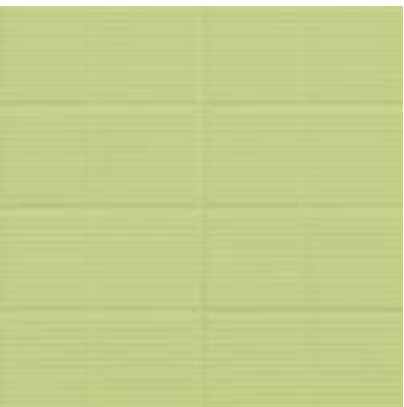

ICONA1 1020VO
10X20-4"X8"

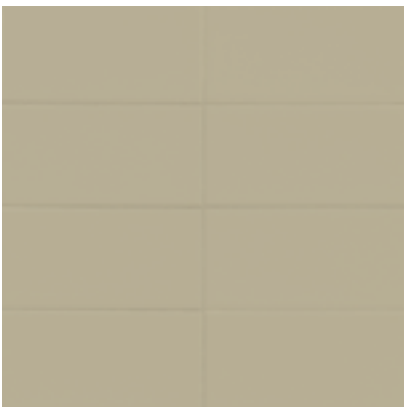

ICONA 1020S
10X20-4"X8" *Sabbia*

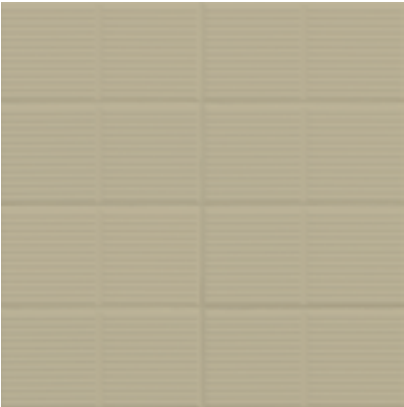

ICONA1 1020S
10X20-4"X8"

Double Firing Technical Specifications

UNI EN 14411 (ISO 13006) - BIII (appendice L)

	Specification	Test methods	Requirements in accordance to the standards	average value
	DIMENSIONS AND APPEARANCE	ISO 10545-2	PROSPECT L1	COMPLIANT
	WATER ABSORPTION	ISO 10545-3	> 10%	> 10%
	FLEXURAL RESISTANCE		THICKNESS ≥ 7,5 mm: min. 12 N/mm² THICKNESS < 7,5 mm: min. 15 N/mm²	>17 N/mm²
		ISO 10545-4	THICKNESS ≥ 7,5 mm: min. 600 N THICKNESS < 7,5 mm: min. 200 N	COMPLIANT
	MODULUS OF RUPTURE			
	LINEAR EXPANSION THERMIC COEFFICIENT	ISO 10545-8	AVAILABLE ON REQUEST	≤ 7x10 ⁻⁶ °C ⁻¹
	RESISTANCE TO SUDDEN TEMPERATURE CHANGES	ISO 10545-9	AVAILABLE ON REQUEST	RESISTANT
	CRAZING RESISTANCE	ISO 10545-11	ALWAYS TESTED	RESISTANT
	HOUSEHOLD CHEMICALS AND SWIMMING POOL WATER CLEANSERS		МИН. В	МИН. В
	ACIDS AND LOW CONCENTRATION ALKALIS	ISO 10545-13	AVAILABLE ON REQUEST	AVAILABLE ON REQUEST
	ACIDS AND HIGH CONCENTRATION ALKALIS		AVAILABLE ON REQUEST	AVAILABLE ON REQUEST
	STAIN RESISTANCE	ISO 10545-14	МИН. 3	МИН. 3

Packaging

				BOX			PALLET		
SERIES	FORMATO NOMINALE NOMINAL SIZE	BORDO EDGE	SPESSORE THICKNESS	PZ/BOX PCS/BOX	MQ/BOX SM/BOX	KG/BOX KG/BOX	BOX/PALLET BOXES/PALLET	MQ/PALLET SM/PALLET	KG/PALLET KG/PALLET
ICONA	10X20 ~4"X8"	NATURAL	9,8	50	1,00	17,95	45	45,00	823,75
	10X20 ~4"X8" STRUCTURE	NATURAL	9,8 (10,8)	48	0,96	17,95	45	43,20	823,75

Symbols

SUGGESTED APPLICATIONS

 Dometisc purpose

SURFACES

Finish

 Natural

Surface look

 Matt Glossy

SHADE VARIATION

V1

V2

THICKNESS

 9,8

SALES CHARACTERISTICS

 Product sold per item.

Grout line code reference

MAPEI ULTRACOLOR - KERAPOXY EPOXY		
SERIES	COLOR	MAPEI_GROUT LINE CODE REFERENCE
ICONA	CM	170
ICONA	FL	103
ICONA	G	111
ICONA	LM	103
ICONA	S	115
ICONA	VO	130

All our products are sold only in complete boxes, whether the unit of measure is per item or per square metre.